

FEATURES

- ※ Miniature 2.8*1.95mm
- ※ Side push mid-mount type
- ※ 300,000 operation life cycles
- ※ Better soldering peeling strength
- ※ Height from surface of PCB:0.975mm


APPLICATION

- ※ Smart phone
- ※ Medical
- ※ Portable electronic device
- ※ 3C products


SPECIFICATION

Contact Rating	10uA,2V DC to 20mA,15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	160±50gf
Travel	0.13mm
Operating Life	300,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER



CIRCUIT

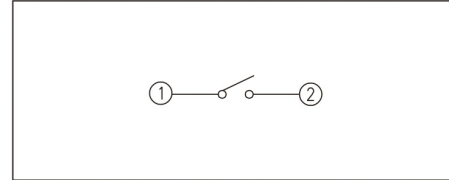

PACKAGE

<Tape & Reel>
5000 pcs

TACT SWITCH

ST1C

