


Schottky Barrier Diode
Ultra High-Speed Switching, Voltage Clamping
Protection Circuits and Blocking Applications

Features

- Low forward voltage.
- Guard ring protected.
- Hermetically-sealed leaded glass package.

LL-34

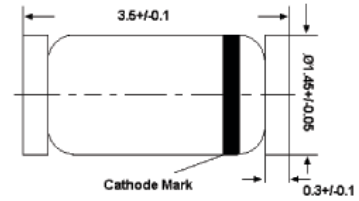

Glass case MINIMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Continuous Reverse Voltage	V_R	30	V
Continuous Forward Current	I_F	200	mA
Average Forward Current	$I_{F(AV)}$	200	mA
Repetitive peak Forward Current	I_{FRM}	300	mA
Non-repetitive Peak Forward Current	I_{FSM}	5	A
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	320	K/W
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 0.1$ mA at $I_F = 1$ mA at $I_F = 10$ mA at $I_F = 30$ mA at $I_F = 100$ mA	V_F	240 320 400 500 800	mV
Reverse Current at $V_R = 25$ V	I_R	2.3	μA
Reverse Recovery Time at $I_F = 10$ mA, $I_R = 10$ mA, $R_L = 100 \Omega$	t_{rr}	4	ns



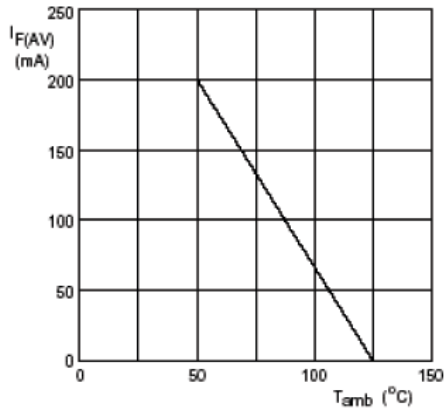


Fig. 1 Derating curve.

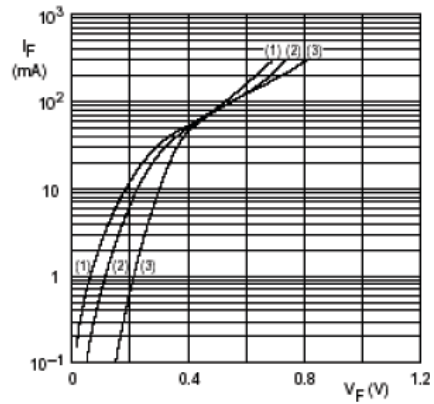

- (1) T_{amb} = 125 °C.
- (2) T_{amb} = 85 °C.
- (3) T_{amb} = 25 °C.

Fig. 2 Forward current as a function of forward voltage; typical values.

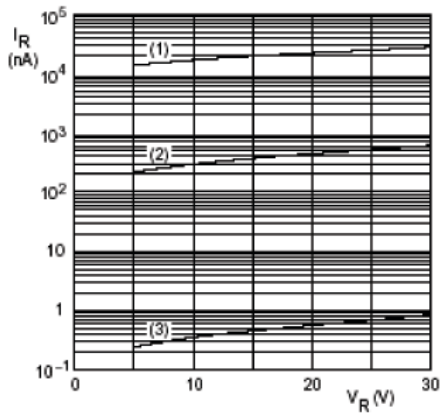

- (1) T_{amb} = 85 °C.
- (2) T_{amb} = 25 °C.
- (3) T_{amb} = -40 °C.

Fig. 3 Reverse current as a function of reverse voltage; typical values.