



## Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 40A peak
- ◆ Saves space on printed circuit boards
- ◆ Recommended for non-automotive applications



## Mechanical Data

- ◆ Case: MFxM (MBM), MFxS (MBS)  
Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ Mounting Position: Any
- ◆ Weight: 0.078 oz., 0.22 g



## Maximum Ratings and Electrical Characteristics

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbols	MF2M MF2S	MF4M MF4S	MF6M MF6S	MF8M MF8S	MF10M MF10S	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	1000	Volts
Maximum average forward output rectified current (see Fig.1)	$I_{F(AV)}$	1.0					Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	40.0					Amps
Rating for fusing ( $t < 8.3\text{ms}$ )	$I^2t$	5.0					$\text{A}^2\text{sec}$
Maximum instantaneous forward voltage drop per leg at 0.4A	$V_F$	1.1					Volt
Maximum DC reverse current at rated DC blocking voltage per leg	$I_R$	5.0 100					$\mu\text{A}$
Typical thermal resistance per leg	$R_{\theta JA}$	85 <sup>(1)</sup>					$^\circ\text{C/W}$
	$R_{\theta JA}$	70 <sup>(2)</sup>					
	$R_{\theta JL}$	20 <sup>(1)</sup>					
Typical junction capacitance per leg <sup>(3)</sup>	$C_J$	13					pF
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150					$^\circ\text{C}$

- Notes:**
1. On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads
  2. On aluminum substrate P.C.B. with an area of 0.8 x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad
  3. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

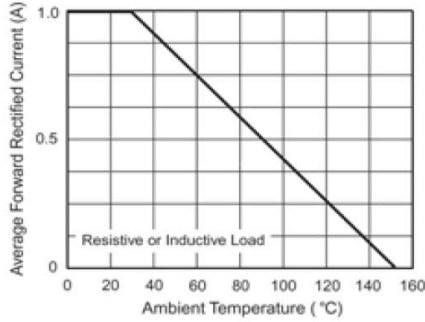


Figure 1. Derating Curve for Output Rectified Current

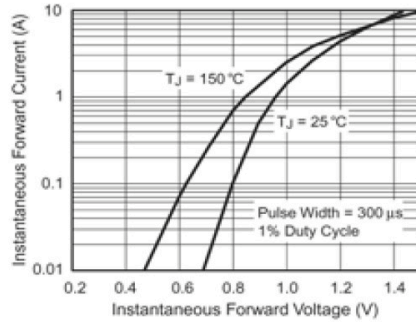


Figure 3. Typical Forward Voltage Characteristics Per Leg

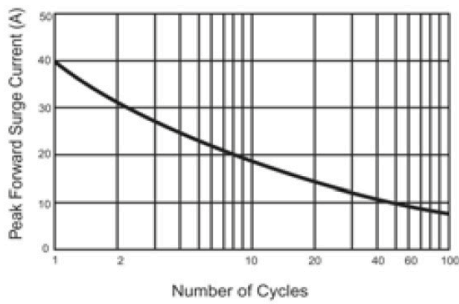


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

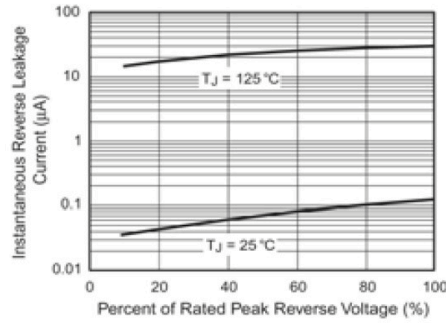


Figure 4. Typical Reverse Leakage Characteristics Per Leg



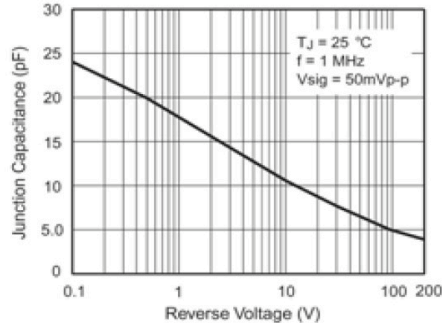


Figure 5. Typical Junction Capacitance Per Leg

### MBM

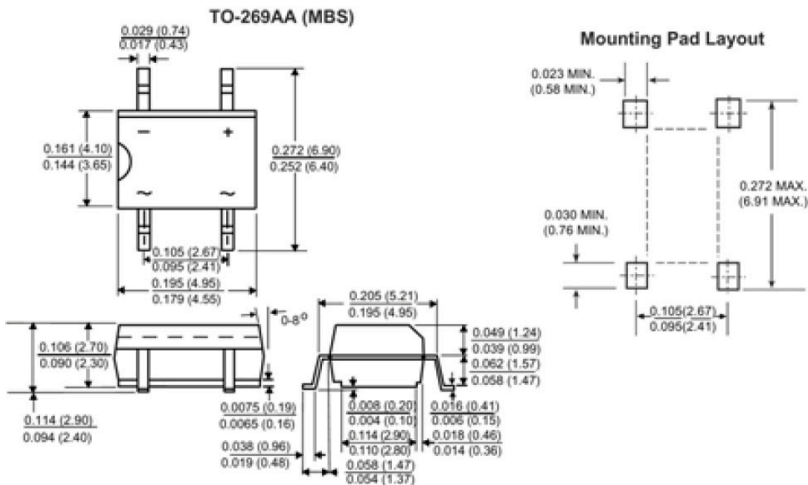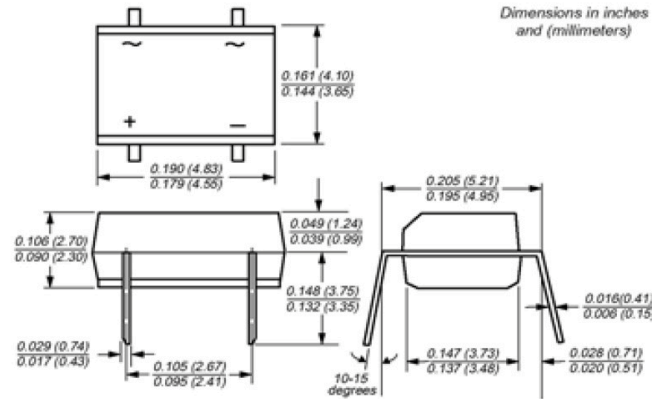

Package outline dimensions in inches (millimeters)