

RUA Series

Features

- 130°C, 2,000 ~ 3,000 hours assured
- For automobile modules and other high temperature applications
- RoHS Compliance




Sleeve & Marking Color: Black & White

Specifications

Items	Performance																																								
Category Temperature Range	10 ~ 250V -40°C ~ +130°C	350 ~ 450V -25°C ~ +130°C																																							
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																								
Leakage Current (at 20°C)	<table border="1"> <tr> <td>Rated voltage</td> <td>≤ 100V</td> <td>> 100V</td> </tr> <tr> <td>Time</td> <td>after 2 minutes</td> <td>after 1 minutes</td> </tr> <tr> <td>Leakage Current</td> <td>$I = 0.01CV$ or 3 (μA) whichever is greater</td> <td>$CV \leq 1,000$ $I = 0.1CV + 40(\mu A)$</td> </tr> <tr> <td></td> <td></td> <td>$CV > 1,000$ $I = 0.04CV + 100(\mu A)$</td> </tr> </table> <p>Where, C = rated capacitance in μF V = rated DC working voltage in V</p>		Rated voltage	≤ 100V	> 100V	Time	after 2 minutes	after 1 minutes	Leakage Current	$I = 0.01CV$ or 3 (μA) whichever is greater	$CV \leq 1,000$ $I = 0.1CV + 40(\mu A)$			$CV > 1,000$ $I = 0.04CV + 100(\mu A)$																											
Rated voltage	≤ 100V	> 100V																																							
Time	after 2 minutes	after 1 minutes																																							
Leakage Current	$I = 0.01CV$ or 3 (μA) whichever is greater	$CV \leq 1,000$ $I = 0.1CV + 40(\mu A)$																																							
		$CV > 1,000$ $I = 0.04CV + 100(\mu A)$																																							
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> </tr> </table>		Rated Voltage	10	16	25	35	50	63	160	200	250	350	400	450	Tanδ (max)	0.15	0.12	0.10	0.10	0.08	0.08	0.20	0.20	0.20	0.24	0.24	0.24													
Rated Voltage	10	16	25	35	50	63	160	200	250	350	400	450																													
Tanδ (max)	0.15	0.12	0.10	0.10	0.08	0.08	0.20	0.20	0.20	0.24	0.24	0.24																													
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-25°C) / Z(+20°C)</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> </tr> <tr> <td></td> <td>Z(-40°C) / Z(+20°C)</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>6</td> <td>6</td> <td>6</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>		Rated Voltage	10	16	25	35	50	63	160	200	250	350	400	450	Impedance Ratio	Z(-25°C) / Z(+20°C)	3	2	2	2	2	3	3	3	6	6	6		Z(-40°C) / Z(+20°C)	6	4	4	4	4	6	6	6	-	-	-
Rated Voltage	10	16	25	35	50	63	160	200	250	350	400	450																													
Impedance Ratio	Z(-25°C) / Z(+20°C)	3	2	2	2	2	3	3	3	6	6	6																													
	Z(-40°C) / Z(+20°C)	6	4	4	4	4	6	6	6	-	-	-																													
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs for φ D ≤ 8 mm; 3,000 Hrs for φ D ≥ 10 mm</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after applied with rated subjected to DC voltage with the rated ripple current is applied for 2,000 / 3,000 hours at 130°C.</p>		Test Time	2,000 Hrs for φ D ≤ 8 mm; 3,000 Hrs for φ D ≥ 10 mm	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																															
Test Time	2,000 Hrs for φ D ≤ 8 mm; 3,000 Hrs for φ D ≥ 10 mm																																								
Capacitance Change	Within ±20% of initial value																																								
Tanδ	Less than 200% of specified value																																								
Leakage Current	Within specified value																																								
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Less than 500% of specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 130°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).</p>		Test Time	1,000 hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Less than 500% of specified value																															
Test Time	1,000 hrs																																								
Capacitance Change	Within ±20% of initial value																																								
Tanδ	Less than 200% of specified value																																								
Leakage Current	Less than 500% of specified value																																								
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <th rowspan="2">W. V.(V)</th> <th rowspan="2">Cap.(μF)</th> <th colspan="4">Freq.(Hz)</th> </tr> <tr> <th>120</th> <th>1k</th> <th>10k</th> <th>100k up</th> </tr> <tr> <td rowspan="3">10 ~ 63</td> <td>0.47 ~ 100</td> <td>1.00</td> <td>1.85</td> <td>2.25</td> <td>2.50</td> </tr> <tr> <td>150 ~ 470</td> <td>1.00</td> <td>1.70</td> <td>1.88</td> <td>2.00</td> </tr> <tr> <td>1,000</td> <td>1.00</td> <td>1.45</td> <td>1.58</td> <td>1.65</td> </tr> <tr> <td rowspan="2">160 ~ 450</td> <td>Under 33</td> <td>1.00</td> <td>1.50</td> <td>1.75</td> <td>1.80</td> </tr> <tr> <td>47 up above</td> <td>1.00</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> </tr> </table>		W. V.(V)	Cap.(μF)	Freq.(Hz)				120	1k	10k	100k up	10 ~ 63	0.47 ~ 100	1.00	1.85	2.25	2.50	150 ~ 470	1.00	1.70	1.88	2.00	1,000	1.00	1.45	1.58	1.65	160 ~ 450	Under 33	1.00	1.50	1.75	1.80	47 up above	1.00	1.30	1.40	1.50		
W. V.(V)	Cap.(μF)	Freq.(Hz)																																							
		120	1k	10k	100k up																																				
10 ~ 63	0.47 ~ 100	1.00	1.85	2.25	2.50																																				
	150 ~ 470	1.00	1.70	1.88	2.00																																				
	1,000	1.00	1.45	1.58	1.65																																				
160 ~ 450	Under 33	1.00	1.50	1.75	1.80																																				
	47 up above	1.00	1.30	1.40	1.50																																				

Diagram of Dimensions

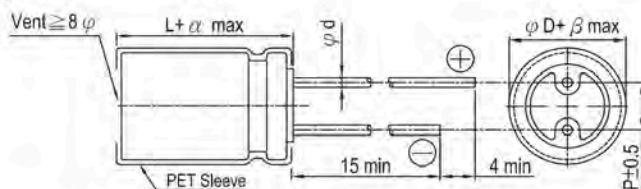


Lead Spacing and Diameter

φ D	8	10	12.5	16
P	3.5	5.0	5.0	7.5
φ d	0.6		0.8	
α	L < 20: 1.5, L ≥ 20: 2.0			
β	0.5			

Unit: mm

The case size of 16×20 is suitable for below diagram:

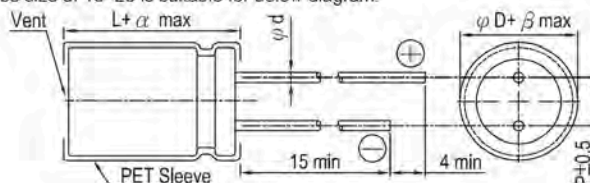

All product specifications in the catalog are subject to change without notice. (CAT. 2017E1)

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 120 Hz, 130°C

Dimension and Permissible Ripple Current

μF	V. DC Contents	10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
10	100									8×11.5	84	8×11.5	84
22	220							8×11.5	113	10×12.5	149	10×12.5	149
33	330					8×11.5	138	10×12.5	162	10×16	200	10×16	200
47	470			8×11.5	150	10×12.5	194	10×16	213	10×16	239	10×20	260
100	101	10×12.5	231	10×16	285	10×16	312	10×20	338				
220	221	10×16	378	10×20	458	12.5×20	557	12.5×25	605	12.5×20	419	12.5×20	419
330	331	10×16	462	12.5×20	621	12.5×25	740	16×20	755				
470	471	10×20	599	12.5×25	806	16×20	902			16×20	689		
1,000	102	16×20	1073										

μF	V. DC Contents	160V (2C)		200V (2D)		250V (2E)		350V (2V)		400V (2G)		450V (2W)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
4.7	4R7							10×20	53	10×20	53	10×25	58
10	100			10×20	78	10×20	78	10×25	85	10×25	86	12.5×20	86
22	220	10×20	115	10×25	126	12.5×20	128	12.5×25	139	12.5×25	142	16×25	154
33	330	10×25	154	12.5×20	157	12.5×25	171	16×25	189	16×25	189	16×31.5	203
47	470	12.5×20	187	12.5×25	204	16×25	225	16×31.5	243	16×31.5	243		
68	680	12.5×25	245	16×20	250	16×31.5	292						
100	101	16×25	329	16×25	329								
150	151	16×31.5	434										

Part Numbering System

RUA Series	470 μF	$\pm 20\%$	16V	Bulk Package	Gas Type	12.5 $\phi \times 25L$	Pb-free and PET sleeve
RUA	471	M	1C	BK	-	1325	S
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type Supplement Code

Note: For more details, please refer to "Part Numbering System (Radial Type)"

Radial