

## VE Series

### Features

- 3  $\phi$  ~ 18  $\phi$ , 85°C, 2,000 hours assured
- Chip type large capacitance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

### Specifications

| Items                                      | Performance   |   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|--|---|---|------------------|--------------------|---|-----------------|---|-----------------|------------------------|------------------|-----------------|---|---|-----------------|----------|-----------------|------|------|------|------|------|------|------|---|---|------------------|-----------|----------------------|------|------|------|------|------|------|------|------|------|---|----------|-----------------|----|---|---|---|---|---|---|---|---|---|-----------|----------------------|---|----|----|----|---|---|---|---|---|----|
| Category Temperature Range                 | -40°C ~ +85°C   |   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Capacitance Tolerance                      | ±20% (at 120Hz, 20°C)   |   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Leakage Current (at 20°C)                  | <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3 ~ 100V</td> <td>160 ~ 450V</td> </tr> <tr> <td>Time</td> <td>after 2 minutes</td> <td>after 5 minutes</td> </tr> <tr> <td>Case size</td> <td>3 ~ 10 <math>\phi</math></td> <td>12.5 ~ 18 <math>\phi</math></td> </tr> <tr> <td>Leakage Current</td> <td>I = 0.01CV or 3<math>\mu</math>A, whichever is greater</td> <td>I = 0.03CV or 4<math>\mu</math>A, whichever is greater<br/>I = 0.04CV + 100<math>\mu</math>A</td> </tr> </table> <p>Where, C = rated capacitance in <math>\mu</math>F, V = rated DC working voltage in V</p>   | Rated Voltage   | 6.3 ~ 100V       | 160 ~ 450V         | Time                                    | after 2 minutes | after 5 minutes                               | Case size       | 3 ~ 10 $\phi$          | 12.5 ~ 18 $\phi$ | Leakage Current | I = 0.01CV or 3 $\mu$ A, whichever is greater | I = 0.03CV or 4 $\mu$ A, whichever is greater<br>I = 0.04CV + 100 $\mu$ A |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Rated Voltage   | 6.3 ~ 100V  | 160 ~ 450V       |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Time  | after 2 minutes   | after 5 minutes  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Case size   | 3 ~ 10 $\phi$   | 12.5 ~ 18 $\phi$ |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Leakage Current                            | I = 0.01CV or 3 $\mu$ A, whichever is greater   | I = 0.03CV or 4 $\mu$ A, whichever is greater<br>I = 0.04CV + 100 $\mu$ A |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Tan $\delta$ (at 120Hz, 20°C)              | <table border="1"> <tr> <td>Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <td>3 ~ 10 <math>\phi</math></td> <td>0.42</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.10</td> <td>-</td> <td>-</td> </tr> <tr> <td>12.5 ~ 18 <math>\phi</math></td> <td>-</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.14</td> <td>0.10</td> <td>0.20</td> <td>0.25</td> </tr> </table> <p>When the capacitance exceeds 1,000<math>\mu</math>F, 0.02 shall be added every 1,000<math>\mu</math>F increase.</p>   | Rated Voltage   | 4                | 6.3                | 10                                      | 16              | 25  | 35              | 50                     | 63               | 100             | 160 ~ 250                                     | 400 ~ 450   | 3 ~ 10 $\phi$   | 0.42     | 0.28            | 0.24 | 0.20 | 0.14 | 0.12 | 0.10 | 0.10 | 0.10 | - | - | 12.5 ~ 18 $\phi$ | -         | 0.38                 | 0.34 | 0.30 | 0.26 | 0.22 | 0.18 | 0.14 | 0.10 | 0.20 | 0.25 |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Rated Voltage   | 4   | 6.3              | 10                 | 16                                      | 25              | 35  | 50              | 63                     | 100              | 160 ~ 250       | 400 ~ 450                                     |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| 3 ~ 10 $\phi$                              | 0.42  | 0.28  | 0.24             | 0.20               | 0.14                                    | 0.12            | 0.10  | 0.10            | 0.10                   | -                | -               |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| 12.5 ~ 18 $\phi$                           | -   | 0.38  | 0.34             | 0.30               | 0.26                                    | 0.22            | 0.18  | 0.14            | 0.10                   | 0.20             | 0.25            |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Low Temperature Characteristics (at 120Hz) | <p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>4.0</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td><math>\phi</math> D &lt; 12.5</td> <td>7</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td><math>\phi</math> D <math>\geq</math> 12.5</td> <td>-</td> <td>5</td> <td>5</td> <td>4</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> </tr> <tr> <td>Z(-40°C)</td> <td><math>\phi</math> D &lt; 12.5</td> <td>15</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>-</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td><math>\phi</math> D <math>\geq</math> 12.5</td> <td>-</td> <td>14</td> <td>12</td> <td>10</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>6</td> <td>10</td> </tr> </table> | Rated Voltage   | 4.0              | 6.3                | 10                                      | 16              | 25  | 35              | 50                     | 63               | 100             | 160 ~ 250                                     | 400 ~ 450   | Impedance Ratio | Z(-25°C) | $\phi$ D < 12.5 | 7    | 4    | 4    | 3    | 2    | 2    | 2    | 2 | - | -                | /Z(+20°C) | $\phi$ D $\geq$ 12.5 | -    | 5    | 5    | 4    | 2    | 2    | 2    | 2    | 3    | 6 | Z(-40°C) | $\phi$ D < 12.5 | 15 | 8 | 5 | 4 | 3 | 3 | 3 | 3 | - | - | /Z(+20°C) | $\phi$ D $\geq$ 12.5 | - | 14 | 12 | 10 | 5 | 4 | 3 | 3 | 6 | 10 |
|  | Rated Voltage   | 4.0   | 6.3              | 10                 | 16                                      | 25              | 35  | 50              | 63                     | 100              | 160 ~ 250       | 400 ~ 450                                     |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Impedance Ratio                            | Z(-25°C)  | $\phi$ D < 12.5   | 7                | 4                  | 4                                       | 3               | 2   | 2               | 2                      | 2                | -               | -   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | /Z(+20°C)   | $\phi$ D $\geq$ 12.5  | -                | 5                  | 5                                       | 4               | 2   | 2               | 2                      | 2                | 3               | 6   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Z(-40°C)  | $\phi$ D < 12.5   | 15               | 8                  | 5                                       | 4               | 3   | 3               | 3                      | 3                | -               | -   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | /Z(+20°C)   | $\phi$ D $\geq$ 12.5  | -                | 14                 | 12                                      | 10              | 5   | 4               | 3                      | 3                | 6               | 10  |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Endurance                                  | <table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value (4V: ±30%)</td> </tr> <tr> <td>Tan<math>\delta</math></td> <td>Less than 200% of specified value (4V: &lt;300%)</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.</p>  | Test Time   | 2,000 Hrs        | Capacitance Change | Within ±20% of initial value (4V: ±30%) | Tan $\delta$    | Less than 200% of specified value (4V: <300%) | Leakage Current | Within specified value |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Test Time   | 2,000 Hrs   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Capacitance Change  | Within ±20% of initial value (4V: ±30%)                                   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Tan $\delta$  | Less than 200% of specified value (4V: <300%)                             |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Leakage Current                            | Within specified value  |   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Shelf Life Test                            | Test time: 1,000 hours; other items are the same as those for the Endurance.<br>The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).  |   |                  |                    |   |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Ripple Current and Frequency Multipliers   | <table border="1"> <tr> <td rowspan="2">Cap. (<math>\mu</math>F)</td> <td>Freq. (Hz)</td> <td>50</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Under 1,000</td> <td>0.80</td> <td>1.00</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>1,000 &lt; C <math>\leq</math> 10,000</td> <td></td> <td>0.85</td> <td>1.00</td> <td>1.15</td> <td>1.25</td> </tr> </table>   | Cap. ( $\mu$ F)   | Freq. (Hz)       | 50                 | 120                                     | 1k              | 10k up  | Under 1,000     | 0.80                   | 1.00             | 1.25            | 1.40  | 1,000 < C $\leq$ 10,000   |                 | 0.85     | 1.00            | 1.15 | 1.25 |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
|  | Cap. ( $\mu$ F)   |   | Freq. (Hz)       | 50                 | 120                                     | 1k              | 10k up  |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| Under 1,000                                |   | 0.80  | 1.00             | 1.25               | 1.40                                    |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |
| 1,000 < C $\leq$ 10,000                    |   | 0.85  | 1.00             | 1.15               | 1.25                                    |                 |   |                 |                        |                  |                 |   |   |                 |          |                 |      |      |      |      |      |      |      |   |   |                  |           |                      |      |      |      |      |      |      |      |      |      |   |          |                 |    |   |   |   |   |   |   |   |   |   |           |                      |   |    |    |    |   |   |   |   |   |    |

### Diagram of Dimensions

Fig. 1


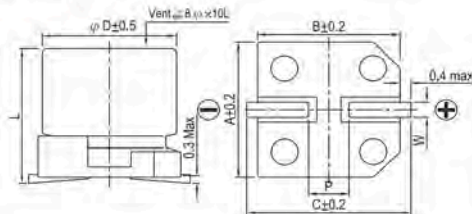


Fig. 2

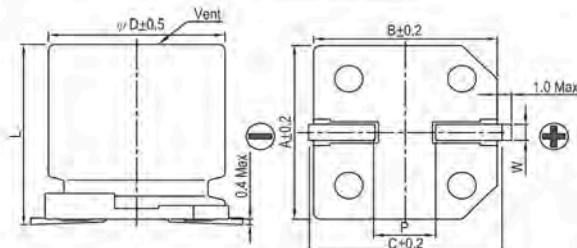





### Lead Spacing and Diameter

Unit: mm

| $\phi$ D | L              | A    | B    | C    | W           | P $\pm$ 0.2 | Fig. No. |
|----------|----------------|------|------|------|-------------|-------------|----------|
| 3        | 5.3 $\pm$ 0.2  | 3.3  | 3.3  | 4.1  | 0.45 ~ 0.75 | 0.8         | 1        |
| 4        | 5.3 $\pm$ 0.2  | 4.3  | 4.3  | 5.1  | 0.5 ~ 0.8   | 1.0         | 1        |
| 5        | 5.3 $\pm$ 0.2  | 5.3  | 5.3  | 5.9  | 0.5 ~ 0.8   | 1.5         | 1        |
| 6.3      | 5.3 $\pm$ 0.2  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8   | 2.0         | 1        |
| 6.3      | 7.7 $\pm$ 0.3  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8   | 2.0         | 1        |
| 8        | 6.5 $\pm$ 0.3  | 8.4  | 8.4  | 9.0  | 0.5 ~ 0.8   | 2.3         | 1        |
| 8        | 10 $\pm$ 0.5   | 8.4  | 8.4  | 9.0  | 0.7 ~ 1.1   | 3.1         | 1        |
| 10       | 7.7 $\pm$ 0.3  | 10.4 | 10.4 | 11.0 | 0.7 ~ 1.3   | 4.7         | 1        |
| 10       | 10 $\pm$ 0.5   | 10.4 | 10.4 | 11.0 | 0.7 ~ 1.3   | 4.7         | 1        |
| 12.5     | 13.5 $\pm$ 0.5 | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4   | 4.4         | 2        |
| 12.5     | 16 $\pm$ 0.5   | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4   | 4.4         | 2        |
| 16       | 16.5 $\pm$ 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4   | 6.4         | 2        |
| 16       | 21.5 $\pm$ 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4   | 6.4         | 2        |
| 18       | 16.5 $\pm$ 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4   | 6.4         | 2        |
| 18       | 21.5 $\pm$ 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4   | 6.4         | 2        |

All product specifications in the catalog are subject to change without notice. (CAT, 2017E1)

### Marking

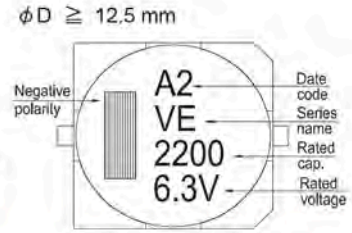

### Dimension and Permissible Ripple Current

Dimension:  $\phi D \times L$ (mm)  
Ripple Current: mA/rms at 120 Hz, 85°C

| $\mu\text{F}$ | Contents | 4V (0G)            |           | 6.3V (0J)          |                | 10V (1A)                 |                   | 16V (1C)                    |                  | 25V (1E)           |                | 35V (1V)           |                | 50V (1H)           |                | 63 (1J)           |          |    |
|---------------|----------|--------------------|-----------|--------------------|----------------|--------------------------|-------------------|-----------------------------|------------------|--------------------|----------------|--------------------|----------------|--------------------|----------------|-------------------|----------|----|
|               |          | $\phi D \times L$  | mA        | $\phi D \times L$  | mA             | $\phi D \times L$        | mA                | $\phi D \times L$           | mA               | $\phi D \times L$  | mA             | $\phi D \times L$  | mA             | $\phi D \times L$  | mA             | $\phi D \times L$ | mA       |    |
| 1             | 010      |                    |           |                    |                |                          |                   |                             |                  |                    |                |                    |                |                    | 4x5.3          | 10                | 4x5.3    | 8  |
| 2.2           | 2R2      |                    |           |                    |                |                          |                   |                             |                  |                    |                |                    |                |                    | 4x5.3          | 14                | 4x5.3    | 12 |
| 3.3           | 3R3      |                    |           |                    |                |                          |                   |                             |                  | 3x5.3              | 14             | 3x5.3              | 14             | 4x5.3              | 17             | 5x5.3             | 22       |    |
| 4.7           | 4R7      |                    |           |                    |                | 3x5.3                    | 14                | 3x5.3                       | 14               | 4x5.3              | 26             | 4x5.3              | 26             | 4x5.3              | 20             | 5x5.3             | 25       |    |
| 10            | 100      |                    |           | 3x5.3              | 16             | 4x5.3                    | 26                | 4x5.3                       | 26               | 5x5.3              | 44             | 5x5.3              | 44             | 5x5.3              | 35             | 6.3x5.3<br>8x6.5  | 40<br>46 |    |
| 22            | 220      | 3x5.3              | 16        | 4x5.3              | 26             | 5x5.3                    | 44                | 4x5.3<br>5x5.3              | 30<br>44         | 5x5.3<br>6.3x5.3   | 47<br>59       | 5x5.3<br>6.3x5.3   | 47<br>59       | 6.3x5.3<br>6.3x7.7 | 50<br>65       | 8x10              | 139      |    |
| 33            | 330      | 4x5.3              | 31        | 4x5.3              | 31             | 4x5.3<br>5x5.3           | 31<br>55          | 5x5.3                       | 55               | 5x5.3<br>6.3x5.3   | 55<br>67       | 6.3x5.3<br>6.3x7.7 | 67<br>85       | 6.3x7.7<br>8x6.5   | 75<br>95       | 8x10              | 139      |    |
| 47            | 470      | 4x5.3              | 34        | 4x5.3<br>5x5.3     | 34<br>55       | 6.3x5.3                  | 75                | 5x5.3<br>6.3x5.3            | 55<br>75         | 6.3x5.3<br>6.3x7.7 | 75<br>98       | 6.3x7.7<br>8x6.5   | 98<br>105      | 6.3x7.7<br>8x10    | 75<br>190      | 10x10             | 200      |    |
| 68            | 680      | 5x5.3              | 58        | 5x5.3<br>6.3x5.3   | 58<br>89       | 5x5.3<br>6.3x5.3         | 58<br>89          | 6.3x5.3                     | 89               | 6.3x7.7            | 109            | 6.3x7.7            | 109            | 8x10               | 190            | 10x10             | 226      |    |
| 100           | 101      | 5x5.3<br>6.3x5.3   | 58<br>89  | 6.3x5.3            | 89             | 6.3x5.3<br>6.3x7.7       | 89<br>109         | 6.3x5.3<br>6.3x7.7<br>8x6.5 | 89<br>109<br>125 | 6.3x7.7<br>8x6.5   | 109<br>145     | 8x10               | 252            | 8x10               | 190            | 10x10             | 226      |    |
| 150           | 151      |                    |           |                    |                |                          |                   |                             |                  |                    |                | 10x7.7             | 252            |                    |                |                   |          |    |
| 220           | 221      | 6.3x5.3<br>6.3x7.7 | 89<br>124 | 6.3x5.3<br>6.3x7.7 | 89<br>124      | 6.3x7.7<br>8x6.5<br>8x10 | 124<br>175<br>270 | 6.3x7.7<br>8x10             | 124<br>270       | 8x10<br>10x7.7     | 270<br>270     | 8x10<br>10x10      | 270<br>370     | 10x10              | 320            | 12.5x13.5         | 500      |    |
| 330           | 331      | 6.3x7.7            | 124       | 6.3x7.7<br>8x6.5   | 124<br>190     | 8x10                     | 290               | 8x10<br>10x7.7              | 290<br>290       | 10x10              | 400            | 10x10              | 400            | 12.5x13.5          | 600            | 12.5x16           | 600      |    |
| 470           | 471      | 8x10               | 290       | 8x10               | 290            | 10x7.7<br>10x10          | 290<br>400        | 10x10                       | 400              | 10x10              | 400            | 12.5x13.5          | 680            | 12.5x16            | 740            | 16x16.5           | 850      |    |
| 680           | 681      |                    |           | 10x7.7             | 290            | 10x10                    | 410               | 10x10                       | 410              | 12.5x13.5          | 680            | 12.5x13.5          | 680            | 16x16.5            | 1,000          | 18x16.5           | 1,100    |    |
| 1,000         | 102      |                    |           | 10x10              | 430            | 10x10                    | 430               | 12.5x13.5                   | 750              | 12.5x13.5          | 750            | 16x16.5            | 1,100          | 18x16.5<br>16x21.5 | 1,350<br>1,400 |                   |          |    |
| 2,200         | 222      |                    |           | 12.5x13.5          | 890            | 12.5x13.5                | 890               | 16x16.5                     | 1,100            | 16x16.5            | 1,100          | 18x16.5<br>16x21.5 | 1,450<br>1,500 |                    |                |                   |          |    |
| 3,300         | 332      |                    |           | 12.5x16            | 1,000          | 16x16.5                  | 1,300             | 16x16.5                     | 1,300            | 18x16.5<br>16x21.5 | 1,450<br>1,650 | 18x21.5            | 1,750          |                    |                |                   |          |    |
| 4,700         | 472      |                    |           | 16x16.5            | 1,400          | 16x16.5                  | 1,400             | 18x16.5<br>16x21.5          | 1,600<br>1,650   | 18x21.5            | 1,750          |                    |                |                    |                |                   |          |    |
| 6,800         | 682      |                    |           | 18x16.5<br>16x21.5 | 1,700<br>1,750 | 18x16.5<br>16x21.5       | 1,700<br>1,750    | 18x21.5                     | 2,000            |                    |                |                    |                |                    |                |                   |          |    |
| 10,000        | 103      |                    |           | 18x21.5            | 2,000          | 18x21.5                  | 2,000             |                             |                  |                    |                |                    |                |                    |                |                   |          |    |

| $\mu\text{F}$ | Contents | 100V (2A)          |            | 160V (2C)          |            | 200V (2D)          |            | 250V (2E)          |            | 400V (2G)         |     | 450V (2W)         |     |
|---------------|----------|--------------------|------------|--------------------|------------|--------------------|------------|--------------------|------------|-------------------|-----|-------------------|-----|
|               |          | $\phi D \times L$  | mA         | $\phi D \times L$  | mA         | $\phi D \times L$  | mA         | $\phi D \times L$  | mA         | $\phi D \times L$ | mA  | $\phi D \times L$ | mA  |
| 4.7           | 4R7      |                    |            |                    |            |                    |            |                    |            | 12.5x13.5         | 120 | 12.5x13.5         | 120 |
| 10            | 100      | 8x10               | 90         |                    |            |                    |            | 12.5x13.5          | 150        | 12.5x13.5         | 120 | 12.5x16           | 130 |
| 22            | 220      | 8x10               | 90         |                    |            | 12.5x13.5          | 240        | 12.5x13.5          | 150        | 16x16.5           | 140 | 16x16.5           | 140 |
| 33            | 330      | 10x10              | 120        | 12.5x13.5          | 290        | 12.5x16            | 310        | 12.5x16            | 240        | 16x16.5           | 140 | 18x16.5           | 180 |
| 47            | 470      | 10x10              | 120        | 12.5x16            | 370        | 16x16.5            | 420        | 16x16.5            | 340        | 18x16.5           | 280 | 18x21.5           | 250 |
| 68            | 680      | 12.5x13.5          | 380        | 16x16.5            | 500        | 16x16.5            | 420        | 18x16.5<br>16x21.5 | 440<br>450 | 18x21.5           | 350 |                   |     |
| 100           | 101      | 12.5x13.5          | 440        | 18x16.5<br>16x21.5 | 650<br>690 | 18x16.5<br>16x21.5 | 550<br>590 | 18x21.5            | 490        |                   |     |                   |     |
| 220           | 221      | 16x16.5            | 600        |                    |            |                    |            |                    |            |                   |     |                   |     |
| 330           | 331      | 18x16.5<br>16x21.5 | 780<br>850 |                    |            |                    |            |                    |            |                   |     |                   |     |

### Part Numbering System

|             |                   |                       |               |              |                |                              |                            |
|-------------|-------------------|-----------------------|---------------|--------------|----------------|------------------------------|----------------------------|
| VE Series   | 470 $\mu\text{F}$ | $\pm 20\%$            | 6.3V          | Carrier Tape | 8 $\phi$ x 10L | Pb-free and PET coating case |                            |
| <b>VE-</b>  | <b>471</b>        | <b>M</b>              | <b>0J</b>     | <b>TR</b>    | <b>-</b>       | <b>0810</b>                  | <b>S</b>                   |
| Series Name | Capacitance       | Capacitance Tolerance | Rated Voltage | Package Type | Terminal Type  | Case size                    | Lead Wire and Coating Type |
|             |                   |                       |               |              |                |                              | Supplement Code            |

Note: For more details, please refer to "Part Numbering System (SMD Type)".

All product specifications in the catalog are subject to change without notice. (CAT. 2017E1)

SMD