


DIP SWITCH
SDHA SERIES

2.2mm
Half Pitch Type



2018

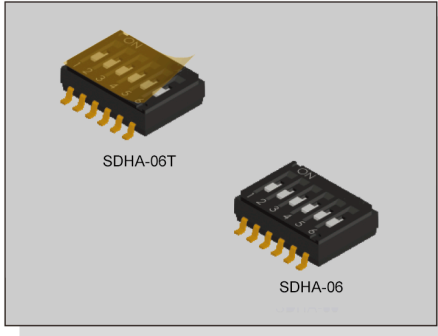

FEATURES

- ※Low profile 2.2mm height
- ※Gold contact for high reliability
- ※Top tape type for washing process


APPLICATION

- ※Industrial control
- ※Automatic machines control
- ※NB, electronic devices

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	500gf max.
Travel	0.8mm
Operating Life	1, 000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

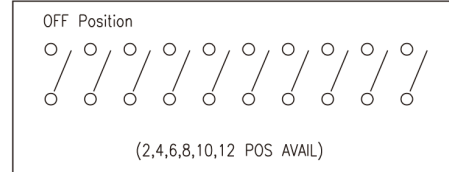

PACKAGE


<Tape & Reel>

1800 pcs

<Tube>

- SDHA-02: 125 pcs
- SDHA-04: 75 pcs
- SDHA-06: 54 pcs
- SDHA-08: 40 pcs
- SDHA-10: 33 pcs
- SDHA-12: 28 pcs

HOW TO ORDER

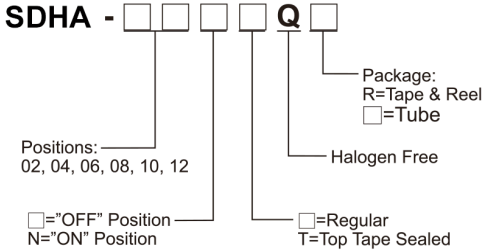

DIP SWITCH

SDHA

