


TACT SWITCH  
SMTA2 SERIES

1.8x4.5  
Side Push Sealed Type



2018

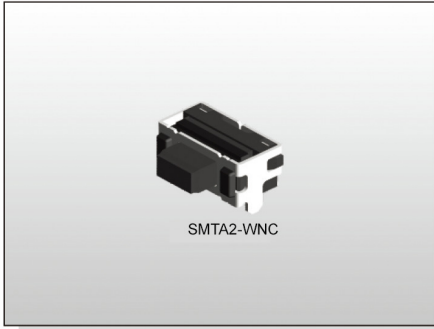

**FEATURES**

- ※ Compact-sized 1.9x4.5mm
- ※ Side actuated
- ※ Sealed with dust proof structure

**APPLICATION**


- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device

**SPECIFICATION**


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf
Travel	0.20mm
Operating Life	100,000 cycles
Operating Temp.	-30°C ~ +80°C
Storage Temp.	-40°C ~ +90°C

**HOW TO ORDER**

SMTA2 - W N C Q R □

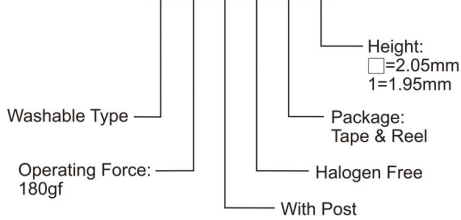

**CIRCUIT**

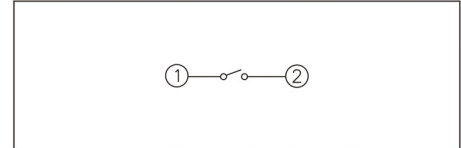


**PACKAGE**

<Tape & Reel>  
3000 pcs

TACT SWITCH

**SMTA2-WNCQR**

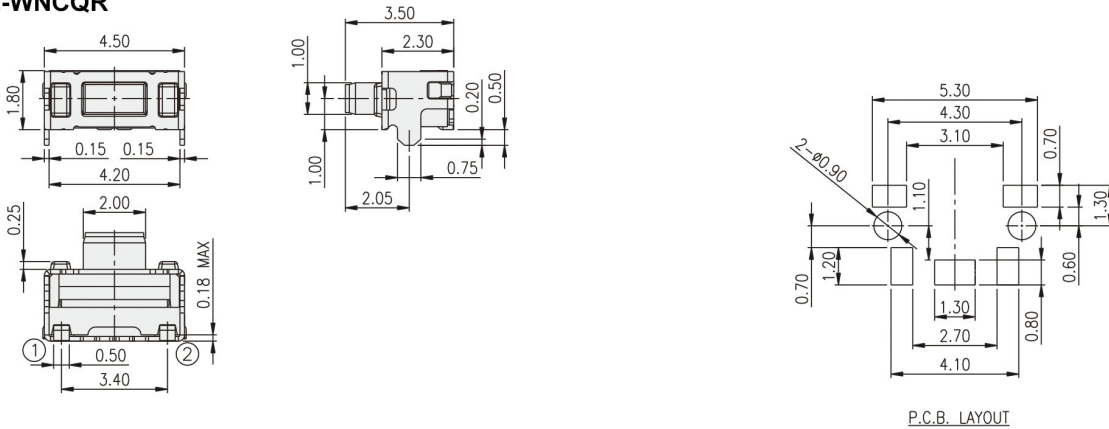

**SMTA2-WNCQR1**

