

FEATURES

- ※ Double switch
- ※ Two Circuit

APPLICATION

- ※ Audio, OA equipment
- ※ Instrumentation
- ※ Setup box

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf
Travel	0.20mm
Operating Life	100,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

HOW TO ORDER

ST7A - 1 4 K Q P

1=Single Stem
2=Double Stem

Stem High:
3.80mm


Package:
Bulk Pack

Halogen Free

Stem Color:
Black

Operating Force:
180gf

CIRCUIT

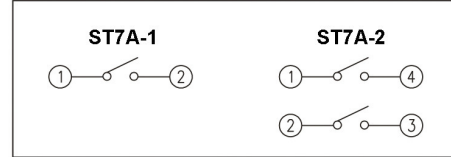


PACKAGE

<Bag>
400 pcs

TACT SWITCH

ST7A-1

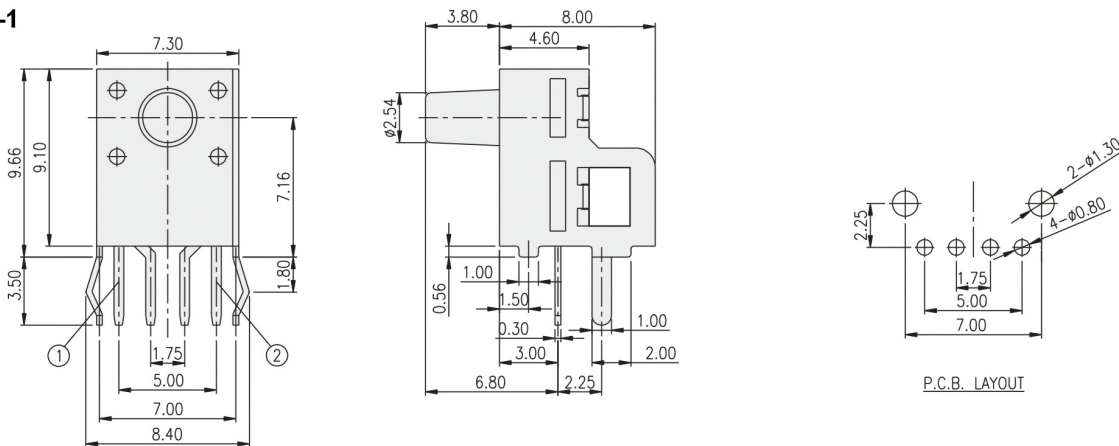

ST7A-2

