


## DIP SWITCH SNDA SERIES

Right Angle Type

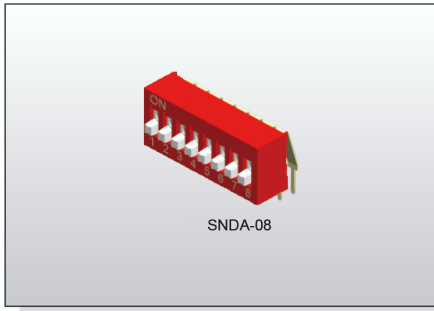

### FEATURES

- ✳ Side actuation
- ✳ Gold contact for high reliability
- ✳ Red, blue, and black color options.


### APPLICATION

- ✳ Industrial control
- ✳ Computers and peripherals
- ✳ Variety of function controls

### SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	50mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	2mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C

### CIRCUIT

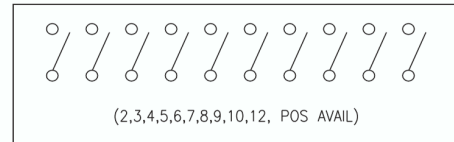


### PACKAGE

#### <Tube>


SNDA-02: 73pcs	SNDA-02T: 70 pcs
SNDA-03: 52pcs	SNDA-03T: 50 pcs
SNDA-04: 40pcs	SNDA-04T: 39 pcs
SNDA-05: 33pcs	SNDA-05T: 32 pcs
SNDA-06: 28pcs	SNDA-06T: 28 pcs
SNDA-07: 24pcs	SNDA-07T: 24 pcs
SNDA-08: 21pcs	SNDA-08T: 21 pcs
SNDA-09: 19pcs	SNDA-09T: 19 pcs
SNDA-10: 17pcs	SNDA-10T: 17 pcs
SNDA-12: 14pcs	SNDA-12T: 14 pcs

### HOW TO ORDER


SNDA -

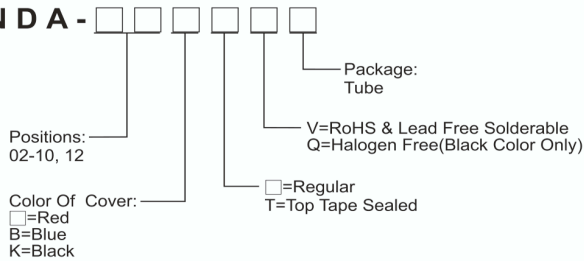

### SNDA

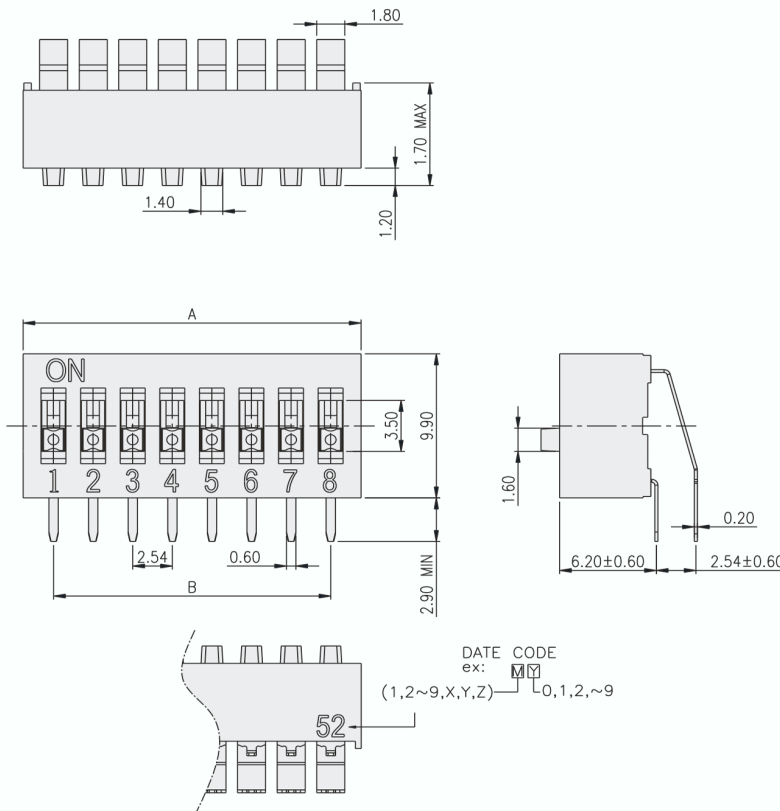

PART NO.	NO.OF POS.	DIM.A	DIM.B
SNDA-02	2	6.44	2.54
SNDA-03	3	8.98	5.08
SNDA-04	4	11.52	7.62
SNDA-05	5	14.06	10.16
SNDA-06	6	16.60	12.70
SNDA-07	7	19.14	15.24
SNDA-08	8	21.68	17.78
SNDA-09	9	24.22	20.32
SNDA-10	10	26.76	22.86
SNDA-12	12	31.84	27.94

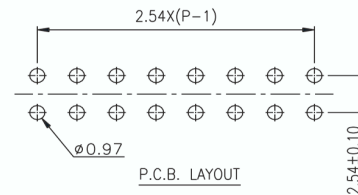

DIP SWITCH