

Features

- 105°C, 5,000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS compliance



Marking color: Blue


Specifications

Items	Performance										
Category Temperature Range	-55°C ~ +105°C										
Capacitance Tolerance	±20% (at 120 Hz, 20°C)										
Leakage Current (at 20°C)*	Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings										
Tanδ (at 120 Hz, 20°C)	See Standard Ratings										
ESR (at 100k ~ 300k Hz, 20°C)	See Standard Ratings										
Endurance	<table border="1"> <tr><td>Test Time</td><td>5,000 Hrs</td></tr> <tr><td>Capacitance Change</td><td>Within ±20% of initial value</td></tr> <tr><td>Tanδ</td><td>Less than 150% of specified value</td></tr> <tr><td>ESR</td><td>Less than 150% of specified value</td></tr> <tr><td>Leakage Current</td><td>Within specified value</td></tr> </table>	Test Time	5,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	5,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 5,000 hours at 105°C.											
Moisture Resistance	<table border="1"> <tr><td>Test Time</td><td>1,000 Hrs</td></tr> <tr><td>Capacitance Change</td><td>Within ±20% of initial value</td></tr> <tr><td>Tanδ</td><td>Less than 150% of specified value</td></tr> <tr><td>ESR</td><td>Less than 150% of specified value</td></tr> <tr><td>Leakage Current</td><td>Within specified value</td></tr> </table>	Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	1,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 ~ 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.											
Resistance to Soldering Heat * (Please refer to page 18 for soldering conditions)	<table border="1"> <tr><td>Capacitance Change</td><td>Within ±10% of initial value</td></tr> <tr><td>Tanδ</td><td>Within specified value</td></tr> <tr><td>ESR</td><td>Within specified value</td></tr> <tr><td>Leakage Current</td><td>Within specified value</td></tr> </table>	Capacitance Change	Within ±10% of initial value	Tanδ	Within specified value	ESR	Within specified value	Leakage Current	Within specified value		
	Capacitance Change	Within ±10% of initial value									
	Tanδ	Within specified value									
	ESR	Within specified value									
Leakage Current	Within specified value										
Ripple Current and Frequency Multipliers											
<table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f < 1k</th> <th>1k ≤ f < 10k</th> <th>10k ≤ f < 100k</th> <th>100k ≤ f < 500k</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.05</td> <td>0.3</td> <td>0.7</td> <td>1.0</td> </tr> </tbody> </table>		Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0
Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k							
Multiplier	0.05	0.3	0.7	1.0							

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.

Diagram of Dimensions

5 φ, 6.3 φ and 8 φ × 6.5 ~ 8L

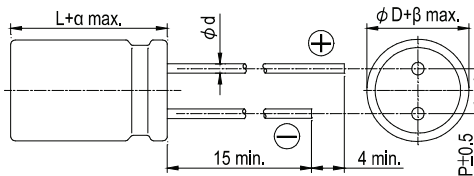


Lead Spacing and Diameter

Unit: mm


φ D	5	6.3	6.3	8	8	8	10
L	8	5.5	8	6.5	8	12	12
P	2.0	2.5		3.5		5.0	
φ d	0.5	0.45	0.6				
α	1.0	0.5	1.0	0.5	1.0		
β	0.5						

8 φ × 12L and 10 φ × 12L

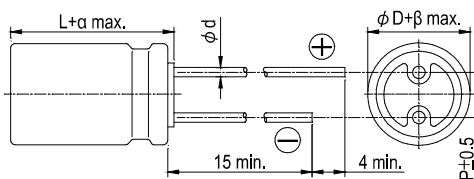


Marking

φ D = 5 ~ 6.3



φ D = 8 ~ 10



Standard Ratings

Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μ F)	Size $\phi D \times L$ (mm)	Tan δ (120 Hz, 20°C)	L C (μ A)	E S R (m Ω /at 100k ~ 300k Hz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 105°C)		
2.5V (0E)	2.9	100	5 x 8	0.10	500	7	4,180		
		330	5 x 8			7	4,180		
			6.3 x 8			5	5,900		
		390	6.3 x 5.5	0.12		10	3,900		
		470	5 x 8	0.10		7	4,180		
			6.3 x 8			5	5,900		
		560	5 x 8	0.12	7	4,180			
			6.3 x 5.5		10	3,900			
			6.3 x 8		5	5,900			
		820			8 x 8	0.10	280	8	4,700
					6.3 x 8		500	5	5,900
					8 x 8			7	6,100
					8 x 12				
1,000	8 x 8				1,350		10	5,560	
2,700	10 x 12								
4V(0G)	4.6	560	6.3 x 8	0.10	500	7	5,600		
			8 x 8				6,100		
			8 x 12						
			680				8 x 12	544	6,640
820	10 x 12	656							
6.3V (0J)	7.2	470	6.3 x 8	0.10	592	7	5,600		
			8 x 8			8	5,700		
			8 x 12			8	5,700		
		560	6.3 x 8		706	7	5,600		
			8 x 8		706		6,100		
		680	10 x 12		857	6,640			
1,500	10 x 12	1,890	10	5,560					
10V(1A)	12.0	270	8 x 6.5	0.12	500	22	3,220		
16V (1C)	18.0	100	6.3 x 5.5	0.10	320	24	2,490		
			6.3 x 8		480	10	4,680		
		150	6.3 x 5.5		500	24	2,490		
			8 x 6.5	500	22	3,220			
		180	8 x 8	576	10	5,000			
			8 x 12	576	16	4,360			
		220	8 x 6.5	500	13	4,150			
		270	6.3 x 8	864	10	5,080			
			8 x 6.5		13	4,150			
			8 x 8		10	5,000			
			8 x 12		11	5,000			
		470	8 x 8	0.12	1,504	8	5,400		
			10 x 12	0.10	1,504	10	6,100		
		560	8 x 12	0.12	1,792	14	4,950		
		1,000	10 x 12	0.12	3,200	12	5,400		

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μ F)	Size $\phi D \times L$ (mm)	Tan δ (120 Hz, 20°C)	L C (μ A)	E S R (m Ω /at 100k ~ 300k Hz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 105°C)
20V(1D)	23.0	120	6.3 x 5.5	0.12	480	25	3,200
		180	8 x 6.5		720	25	3,200
		390	8 x 12		1,560	14	4,970
		560	10 x 12		2,240	12	5,600
25V(1E)	29.0	56	6.3 x 5.5	0.12	280	30	2,800
		82	8 x 6.5		410	28	3,000
		180	8 x 12		900	16	4,650
		220	8 x 12		1,100	16	4,650
		330	10 x 12		1,650	14	5,000
		390	10 x 12		1,950	14	5,000
35V(1V)	40.0	22	6.3 x 5.5	0.12	154	35	2,600
		39	8 x 6.5		273	30	2,800
		82	8 x 12		574	20	4,000
		120	10 x 12		840	18	4,400

Part Numbering System

ORE Series 470 μ F \pm 20% 2.5V Bulk Package Gas Type 6.3 ϕ x 8L

ORE **471** **M** **OE** **BK** - **0608** **XX**

Series Name Capacitance Capacitance Tolerance Rated Voltage Lead Configuration and Package Rubber Type Case Size

S = Standard
KS = AEC-Q200 Qualified, Safety Critical Application
LS = AEC-Q200 Qualified, Non-Safety Critical Application