

FEATURES

- ※ Side actuation
- ※ Wide stem for easy operation
- ※ Gold contact for high reliability


APPLICATION

- ※ Industrial control
- ※ Automatic machines control
- ※ Telecommunication

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	800gf max.
Travel	1mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +85°C
Storage Temp.	-40°C ~ +85°C


CIRCUIT

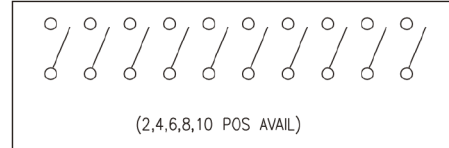

PACKAGE




- <Tube>**
 SNPI(R)/SNPM(R)-02: 70 pcs
 SNPI(R)/SNPM(R)-04: 40 pcs
 SNPI(R)/SNPM(R)-06: 28 pcs
 SNPI(R)/SNPM(R)-08: 20 pcs
 SNPI(R)/SNPM(R)-10: 16 pcs
- <Tape & Reel>**
 SNPM(R)-02, 04, 06, 08, 10: 700 pcs

HOW TO ORDER

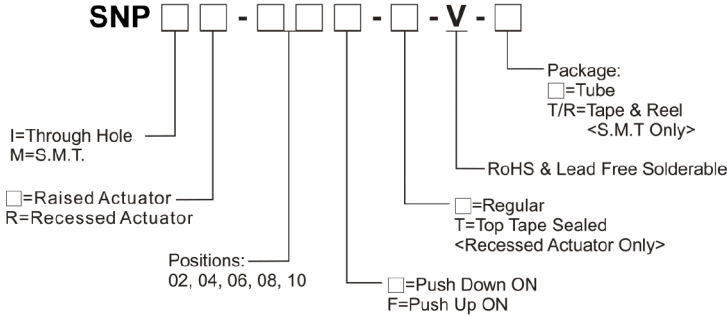


DIP SWITCH

SNPI

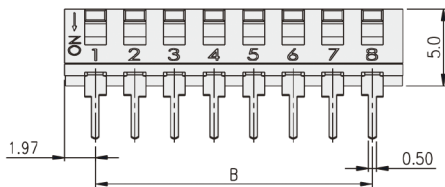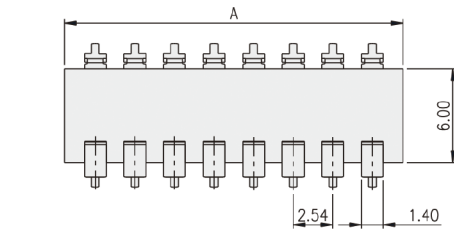


PART NO.	NO.OF POS.	DIM.A	DIM.B
SNPI(R)-02	2	6.48	2.54
SNPI(R)-04	4	11.56	7.62
SNPI(R)-06	6	16.64	12.70
SNPI(R)-08	8	21.72	17.78
SNPI(R)-10	10	26.80	22.86

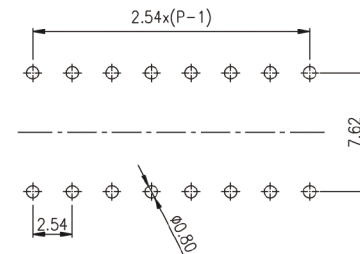



P.C.B. LAYOUT

SNPM

DIP SWITCH

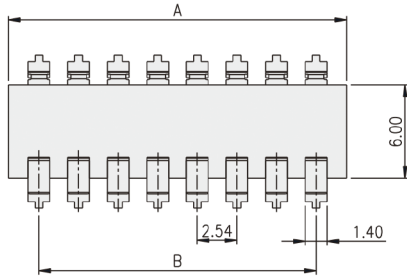

PART NO.	NO.OF POS.	DIM.A	DIM.B
SNPM(R)-02	2	6.48	2.54
SNPM(R)-04	4	11.56	7.62
SNPM(R)-06	6	16.64	12.70
SNPM(R)-08	8	21.72	17.78
SNPM(R)-10	10	26.80	22.86

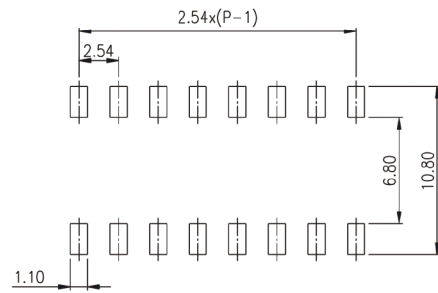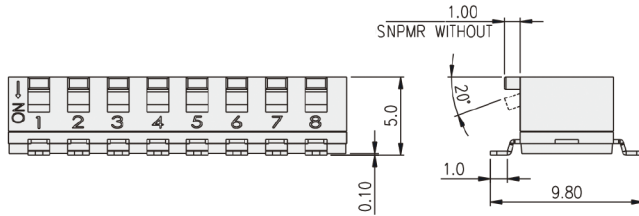

P.C.B. LAYOUT