


# DIP SWITCH STI(I)(M) SERIES

Tri-state  
Low Profile Type



2018

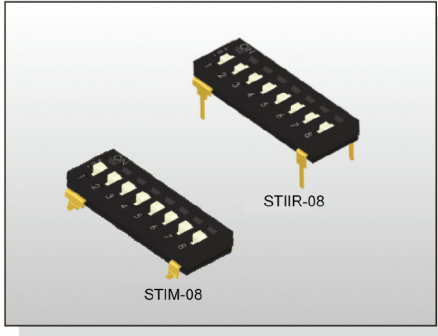

## FEATURES

- ※3-state setting
- ※Low profile for space saving


## APPLICATION

- ※Remote control
- ※Home automation
- ※Telecommunication


## SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	0.8mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

## HOW TO ORDER

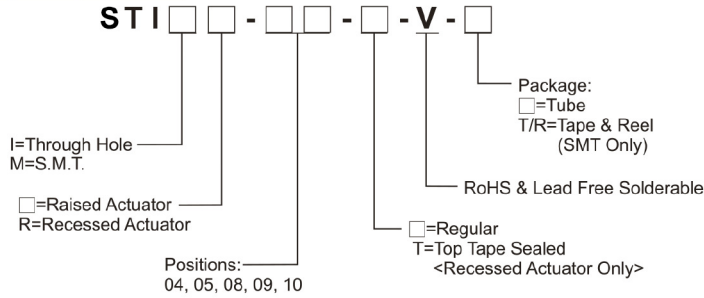

## CIRCUIT


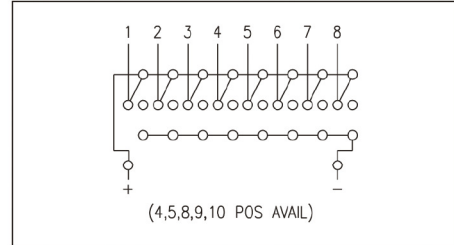


## PACKAGE


- <Tube>  
STII(R)/STIM(R)-04: 41 pcs  
STII(R)/STIM(R)-05: 34 pcs  
STII(R)/STIM(R)-08: 22 pcs  
STII(R)/STIM(R)-09: 20 pcs  
STII(R)/STIM(R)-10: 18 pcs
- <Tape & Reel>  
STIM(R): 900 pcs

DIP SWITCH

## STII(R)

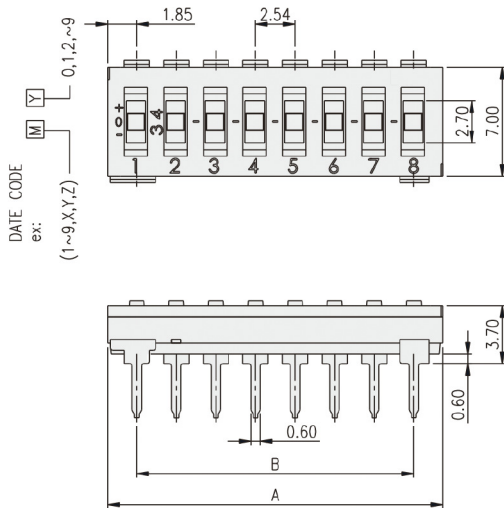





PART NO.	NO. OF POS.	DIM.A	DIM.B
STII(R)-04	4	11.32	7.62
STII(R)-05	5	13.86	10.16
STII(R)-08	8	21.48	17.78
STII(R)-09	9	24.02	20.32
STII(R)-10	10	26.56	22.86

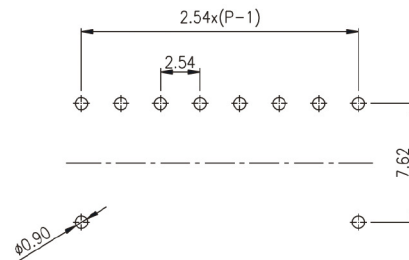

P.C.B. LAYOUT

**STIM(R)**

**DIP SWITCH**

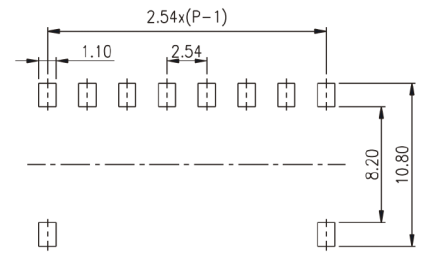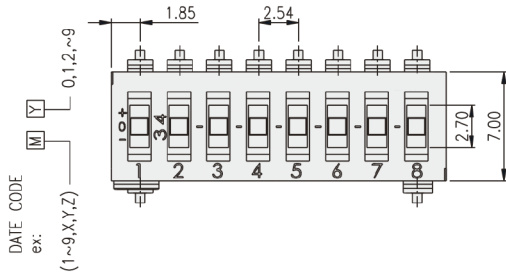

PART NO.	NO.OF POS.	DIM.A	DIM.B
STIM(R)-04	4	11.32	7.62
STIM(R)-05	5	13.86	10.16
STIM(R)-08	8	21.48	17.78
STIM(R)-09	9	24.02	20.32
STIM(R)-10	10	26.56	22.86

P.C.B. LAYOUT