

VUA Series

Features

- 6.3 ϕ ~ 18 ϕ , 125°C, 1,000 ~ 2,000 hours assured
- Chip type high temperature range, for +125°C use
- For automobile modules and other high temperature applications
- RoHS compliance
- AEC-Q200 Parts Available: Replace “S” Suffix with “KS” or “LS” Suffix



Marking color: Black

Specifications

Items	Performance																					
Category Temperature Range	-40°C ~ +125°C																					
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																					
Leakage Current (at 20°C)	I = 0.03CV or 4 (μA) whichever is greater (after 1 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																					
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.32</td> <td>0.24</td> <td>0.21</td> <td>0.18</td> <td>0.15</td> <td>0.15</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>	Rated Voltage	10	16	25	35	50	63	Tanδ (max)	0.32	0.24	0.21	0.18	0.15	0.15							
Rated Voltage	10	16	25	35	50	63																
Tanδ (max)	0.32	0.24	0.21	0.18	0.15	0.15																
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> <tr> <td></td> <td>Z(-40°C)/Z(+20°C)</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> </tr> </table>	Rated Voltage	10	16	25	35	50	63	Impedance Ratio	Z(-25°C)/Z(+20°C)	6	5	4	3	3		Z(-40°C)/Z(+20°C)	12	8	6	4	4
Rated Voltage	10	16	25	35	50	63																
Impedance Ratio	Z(-25°C)/Z(+20°C)	6	5	4	3	3																
	Z(-40°C)/Z(+20°C)	12	8	6	4	4																
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs for $\phi D \leq 8 \times 6.5\text{mm}$ 2,000 Hrs for $\phi D \geq 8 \times 10\text{mm}$</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 1,000 / 2,000 hours at 125°C.</p>	Test Time	1,000 Hrs for $\phi D \leq 8 \times 6.5\text{mm}$ 2,000 Hrs for $\phi D \geq 8 \times 10\text{mm}$	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value													
Test Time	1,000 Hrs for $\phi D \leq 8 \times 6.5\text{mm}$ 2,000 Hrs for $\phi D \geq 8 \times 10\text{mm}$																					
Capacitance Change	Within ±30% of initial value																					
Tanδ	Less than 300% of specified value																					
Leakage Current	Within specified value																					
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value													
Test Time	1,000 Hrs																					
Capacitance Change	Within ±30% of initial value																					
Tanδ	Less than 300% of specified value																					
Leakage Current	Within specified value																					
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <td rowspan="2">Cap. (μF)</td> <td colspan="4">Freq. (Hz)</td> </tr> <tr> <td>50</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>≤ 330</td> <td>0.80</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>$330 < C \leq 4,700$</td> <td>0.85</td> <td>1.0</td> <td>1.20</td> <td>1.30</td> </tr> </table>	Cap. (μF)	Freq. (Hz)				50	120	1k	10k up	≤ 330	0.80	1.0	1.25	1.40	$330 < C \leq 4,700$	0.85	1.0	1.20	1.30		
Cap. (μF)	Freq. (Hz)																					
	50	120	1k	10k up																		
≤ 330	0.80	1.0	1.25	1.40																		
$330 < C \leq 4,700$	0.85	1.0	1.20	1.30																		

Diagram of Dimensions

Fig. 1


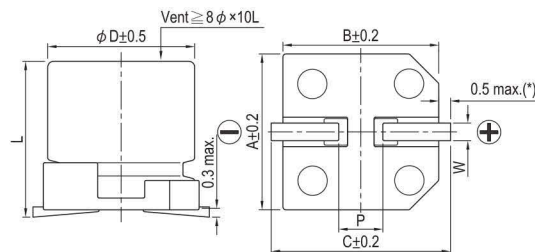


Fig. 2

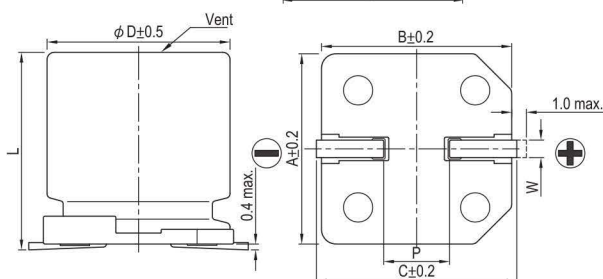

Lead Spacing and Diameter


Unit: mm

ϕD	L	A	B	C	W	P ± 0.2	Fig. No.
6.3	5.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	6.5 ± 0.3	8.3	8.3	9.0	0.5 ~ 0.8	2.3	1
8	10 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1	1
10	10 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2


(*): For 6.3 ϕ is 0.4 max.

Marking


$\phi D = 6.3 \text{ mm}$

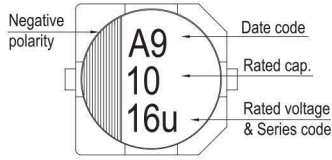

$\phi D = 8 \sim 10 \text{ mm}$

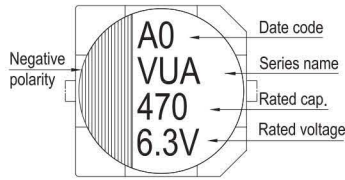

$\phi D \geq 12.5 \text{ mm}$

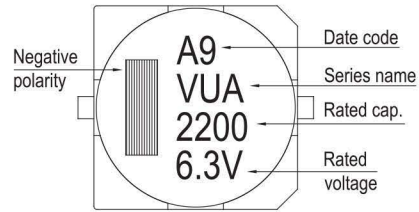


Dimension and Permissible Ripple Current

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 120 Hz, 125°C

Rated Volt. (V _{DC})	Cap. (μF)	Contents	10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)	
			$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
10	100												8×6.5	60
22	220								6.3×5.7	50	8×6.5	75	8×10	100
33	330				6.3×5.7	50	6.3×5.7	50	6.3×7.7	70	8×10	130	10×10	150
47	470				6.3×7.7	70	6.3×7.7	70	8×6.5	75	8×10	130	10×10	150
68	680	6.3×5.7	50	8×6.5	75	8×6.5	75	8×10	130	10×10	180	10×10	150	
100	101	8×6.5	75	8×6.5	75	8×10	130	10×10	180	12.5×13.5	357	12.5×13.5	300	
220	221	8×10	130	10×10	180	10×10	180	12.5×13.5	357	12.5×16	400	16×16.5	600	
330	331	8×10	130	12.5×13.5	480	12.5×13.5	480	16×16.5	650	16×16.5	650	16×16.5	600	
470	471	12.5×13.5	480	12.5×13.5	480	12.5×13.5	480	16×16.5	650	16×16.5	650	18×16.5	800	
680	681	12.5×13.5	480	12.5×13.5	480	12.5×16	585	16×16.5	650	18×16.5	855			
1,000	102	12.5×16	585	12.5×16	585	16×16.5	650	18×16.5	855					
1,500	152	12.5×16	585	16×16.5	650	18×16.5	855							
2,200	222	16×16.5	650	18×16.5	855									
3,300	332	18×16.5	855											
4,700	472	18×16.5	855											

Part Numbering System

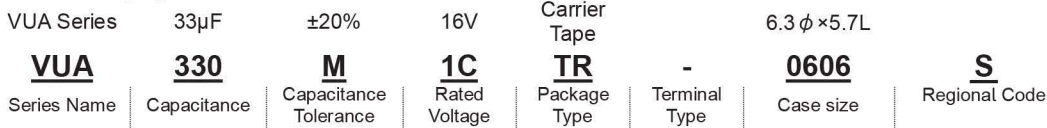

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

SMD