


CUSTOMER :
CUSTOMER P/N:

PRODUCT DIMENSIONS

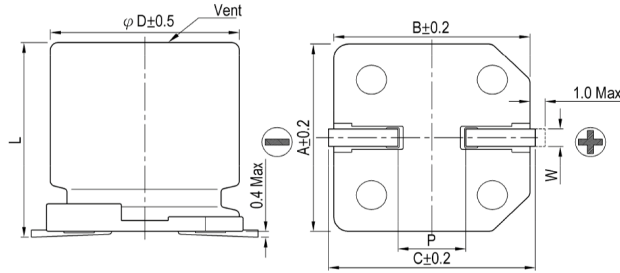


Unit: mm

ϕ D	12.5
L	13.5 ± 0.5
A	13.0
B	13.0
C	13.7
W	1.1~1.4
P	4.4 ± 0.2

Items	Performance				
Rated Voltage V_R	50 V				
Capacitance C_R	330 μ F	(120 Hz, 20°C)			
Category Temperature Range	-55°C ~ +105°C				
Capacitance Tolerance	-20 % ~ +20 %	(120 Hz, 20°C)			
Surge Voltage V_S	57.5 V_{DC}				
Leakage Current (20°C)	$I_{LEAK} \leq 165 \mu A$	After 2 minutes			
Tan δ	≤ 0.10	(120 Hz, 20°C)			
Impedance $max.$	$< 0.12 \Omega$	(100k Hz, 20°C)			
Ripple Current ($I_{AC, R}$ / rms)	900 mA	(100k Hz, 105°C)			
Low Temperature Characteristics at 120 Hz	Impedance ratio	$Z_{(-25^\circ C)} / Z_{(+20^\circ C)}$ 2			
		$Z_{(-55^\circ C)} / Z_{(+20^\circ C)}$ 3			
Ripple Current (A) and Frequency Multipliers	Frequency (Hz)	50,60	120	1k	10k up
	Multiplier	0.60	0.70	0.85	1.0
Endurance and Shelf Life Test	Items	Endurance	Shelf Life Test		
	Test Time	5,000 Hrs at 105°C; V_R	1,000 Hrs at 105°C		
	Cap. Change	Within ± 30 % of initial value	Within ± 30 % of initial value		
	Tan δ	Less than 300% of specified value	Less than 300% of specified value		
	Leakage Current	Within specified value	Within specified value		
Standards	JIS C 5101-1, -18, IEC 60384-4				
Remarks	RoHS Compliance, Halogen-free				

Marking: Each capacitor shall be marked with the following information.

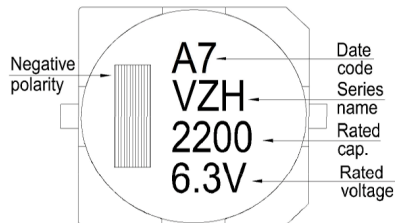

A 7 → January, 2017

→ The suffix of A. D.
→ Month of manufacture

Month	1	2	3	4	5	6
Code	A	B	C	D	E	F
Month	7	8	9	10	11	12
Code	G	H	I	J	K	L

Marking color: Black

* Please refer to "Precautions and Guidelines for Aluminum Electrolytic Capacitors" section in Lelon's catalog for further details.

Publication Date	June 14, 2017	Approval Signatures:	Approved	Checked	Designed
Revision Date					
Version No.	1		Please return one copy with your approval		