


Features


- ◆ Low cost
- ◆ Low leakage
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ T_J is 150°C (Max.) and T_{STG} is 175°C (Max.) with PI glue



DO-204AC (DO-15)

Mechanical Data

- ◆ Case : JEDEC DO-204AC (DO-15) molded plastic
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: MIL-STD-202E method 208C guaranteed
- ◆ Mounting position: Any
- ◆ Weight: 0.014 ounce, 0.39 gram

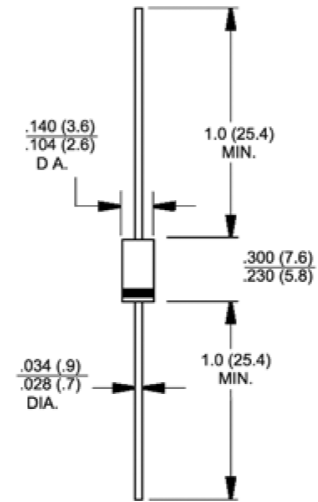

Dimensions in inches and (millimeters)

Maximum Ratings

($T_A=25^\circ\text{C}$)

Characteristics	Symbols	Ratings	Units
Repetitive peak reverse voltage	V_{RRM}	100 400 600	Volts
Average forward current ($T_a=60^\circ\text{C}$)	$I_{F(AV)}$	1.2	Amps
Peak one cycle surge forward current (Non repetitive)	I_{FSM}	100 (50Hz) 110 (60Hz)	Amps
Junction temperature	T_J	-40 to +125	$^\circ\text{C}$
Storage temperature range	T_{STG}	-40 to +150	$^\circ\text{C}$

Electrical Characteristics

($T_A=25^\circ\text{C}$)

Characteristics	Symbols	Test condition	Min.	Typ.	Max.	Units
Peak forward voltage	V_{FM}	$I_{FM}=5\text{A}$	-	-	1.0	Volt
Repetitive peak reverse current	I_{RRM}	$V_{RRM}=\text{Rated}$	-	-	10	μA
Thermal resistance (junction to ambient)	$R_{\theta(j-a)}$	DC	-	-	100	$^\circ\text{C}/\text{W}$

RATINGS AND CHARACTERISTIC CURVES

