



95 E. Jeffryn Boulevard
Deer Park, NY 11729
Tel (631) 595-1818
Fax (631) 595-1283

FR301 thru FR307

Fast Recovery Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 3.0 Amperes

Features


- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability
- ◆ T_j is 150°C (Max.) and T_{STG} is 175°C (Max.) with PI glue



DO-201AD

Mechanical Data

- ◆ Case: Molded plastic DO-201AD
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:
250°C/10 seconds .375" (9.5mm) lead
lengths at 5 lbs., (2.3kg) tension
- ◆ Weight: 0.042 ounce, 1.195 grams

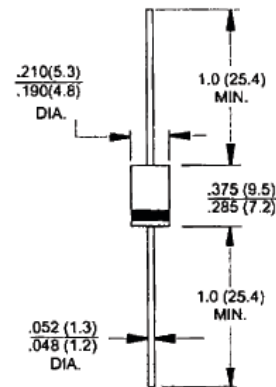

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbols	FR301	FR302	FR303	FR304	FR305	FR306	FR307	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^{\circ}\text{C}$	I_{AV}	3.0							Amps
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0							Amps
Maximum instantaneous forward voltage @ 3.0A	V_F	1.3							Volts
Maximum DC reverse current @ $T_A=25^{\circ}\text{C}$ at rated DC blocking voltage @ $T_A=100^{\circ}\text{C}$	I_R	10.0 150							μA
Maximum reverse recovery time (Note 1)	t_r	150				250	500		nS
Typical junction capacitance (Note 2)	C_j	55							pF
Operating temperature range	T_J	-55 to +125							$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150							$^{\circ}\text{C}$

Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RM}=0.25\text{A}$
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

www.surgecomponents.com



95 E. Jefryn Boulevard
Deer Park, NY 11729
Tel (631) 595-1818
Fax (631) 595-1283

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

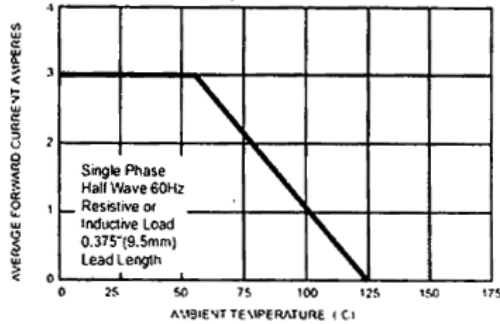


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

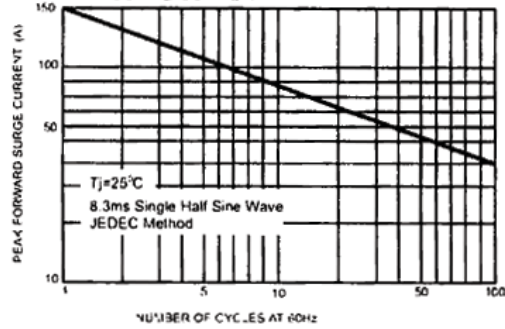


FIG.3- TYPICAL FORWARD CHARACTERISTICS

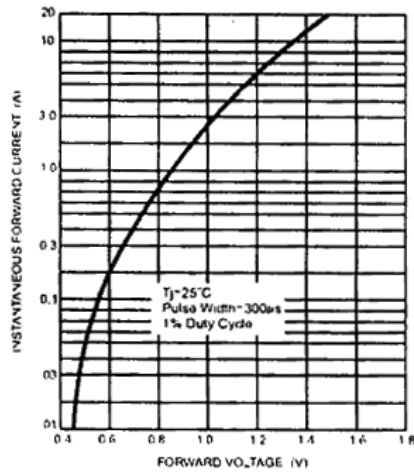


FIG.4- TYPICAL JUNCTION CAPACITANCE

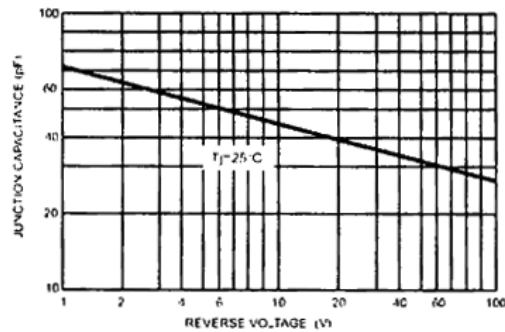


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

