


Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.0 Ampere operation at $T_A=75^{\circ}\text{C}$ and 55°C with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed:
350°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension
- ◆ For AEC-Q101 qualified, add the prefix "A" to part number

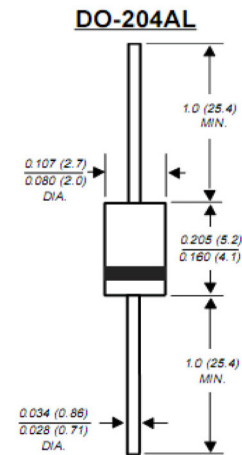

Mechanical Data

- ◆ **Case:** JEDEC DO-204AL molded plastic over glass body
- ◆ **Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any
- ◆ **Weight:** 0.012 ounce, 0.3 gram

Maximum Ratings

(Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbols	GP 10A	GP 10B	GP 10D	GP 10G	GP 10J	GP 10K	GP 10M	GP 10N	GP 10Q	GP 10T	GP 10V	GP 10W	GP 10Y	Units	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1100	1200	1300	1400	1500	1600	Volts	
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	770	840	910	980	1050	1120	Volts	
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1100	1200	1300	1400	1500	1600	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length (See Fig.1)	I_{FAV}	1.0													Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0							25.0							Amps
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead length $T_A=75^{\circ}\text{C}$	I_{RAV}	30													μA	
Maximum instantaneous forward voltage at 1.0A	V_F	1.1					1.2				1.3					Volts
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^{\circ}\text{C}$ @ $T_A=125^{\circ}\text{C}$	I_R	5.0							50							μA
Typical reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $V_R=0.25\text{V}$	t_r	1.0														μs
Typical junction capacitance at 4.0V, 1MHz	C_J	8.0					7.0				5.0					pF
Typical thermal resistance (NOTE 1)	$R_{\theta JA}$	55.0													$^{\circ}\text{C/W}$	
Operating junction temperature range	T_J	-55 to +150							-55 to +125							$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150													$^{\circ}\text{C}$	

Notes: 1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Ratings and Characteristics curves

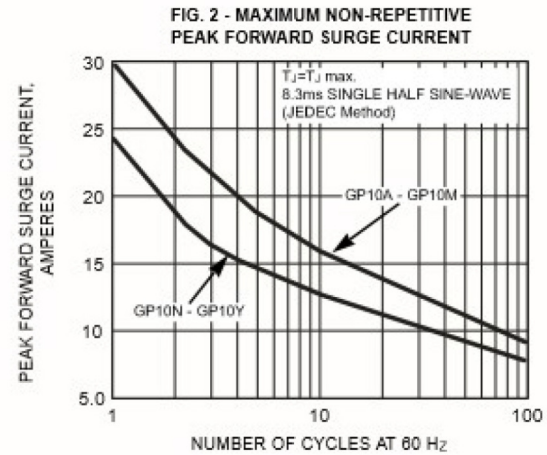
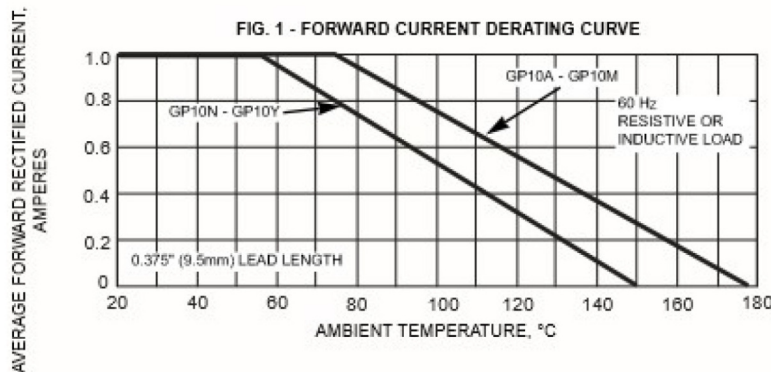


Fig 3. – Typical Instantaneous Forward Characteristics

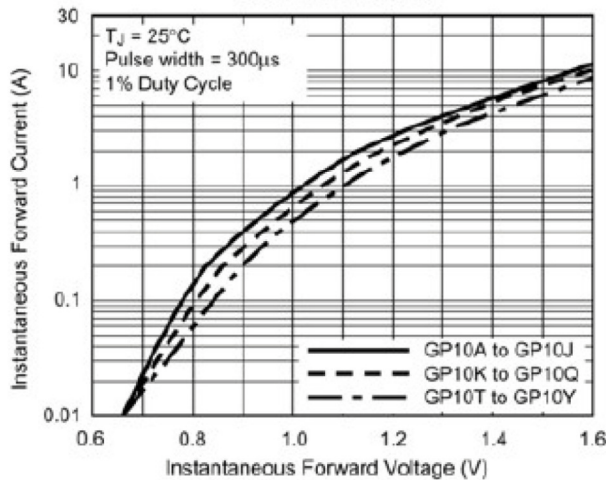


Fig 4. – Typical Reverse Characteristics

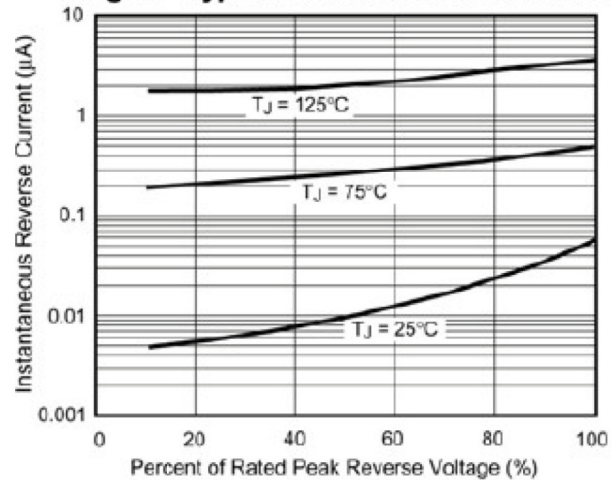


Fig 5. – Maximum Repetitive Peak Reverse Voltage, V_{RRM}

GP10A.....	50V
GP10B.....	100V
GP10D.....	200V
GP10G.....	400V
GP10J.....	600V
GP10K.....	800V
GP10M.....	1000V
GP10N.....	1100V
GP10Q.....	1200V
GP10T.....	1300V
GP10V.....	1400V
GP10W.....	1500V
GP10Y.....	1600V

Fig 6. – Typical Junction Capacitance

