


Features


- ◆ Plastic Package Has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Low power loss , high efficiency
- ◆ For use in low voltage , high frequency inverters , free wheeling , and polarity protection applications
- ◆ Guardring for overvoltage protection

2018


DO-201AD

Mechanical Data

- ◆ Case : JEDEC DO-20AD molded plastic bobky
- ◆ Terminals: Plated axial leads , solderable per MIL-STD-750,Method 2026
High temperature soldering guaramteed:
250°C/10 seconds 0.375"(9.5mm) Lead Length,
5lbs (2.3kg) tension
- ◆ Polarity : Color band denotes cathode end
- ◆ Weight : 0.014 ounce , 1.15 gram
- ◆ Mounting position : Any

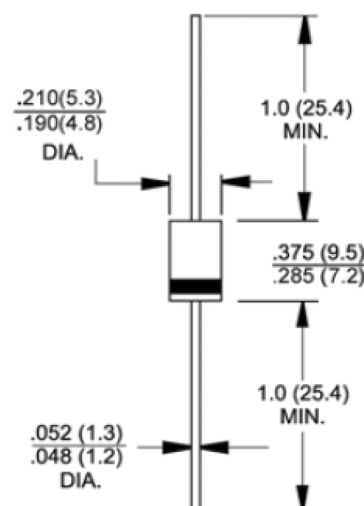

Maximum Ratings and Electrical Characteristics

(TA= 25°C unless otherwise noted)

Parameter	Symbol	SB 5B5	SB5C0	Units
Maximum repetitive peak reverse voltage	V_{RRM}	150	200	Volts
Maximum RMS voltage	V_{RMS}	105	140	Volts
Maximum DC blocking voltage	V_{DC}	150	200	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length at $T_L=100^\circ\text{C}$	$I_{F(AV)}$	5.0		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rates load	I_{FSM}	150		Amps
Maximum DC reverse current @ $T_J=25^\circ\text{C}$ at rated DC blocking voltage @ $T_J=100^\circ\text{C}$	I_R	0.01 5		mA
Maximum forward voltage at 5.0A DC	V_F	0.90		Volts
Typical thermal resistance(Note 2)	$R_{\theta JL}$	16		$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-55 to +150		$^\circ\text{C}$
storage temperature range	T_{STG}	-55 to +150		$^\circ\text{C}$

Notes: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal Resistance Junction to Lead.

RATINGS AND CHARACTERISTIC CURVES

FIG.1 – FORWARD CURRENT DERATING CURVE

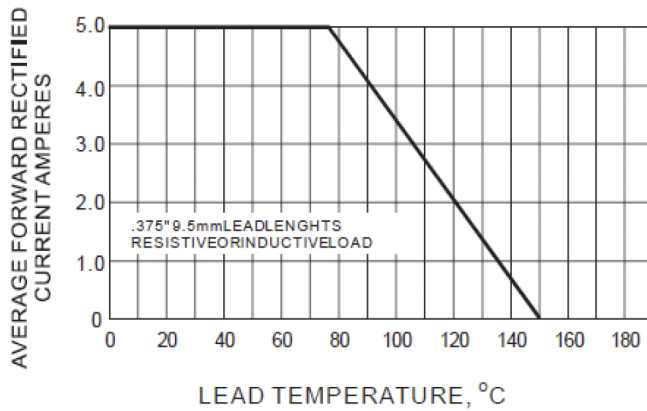


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

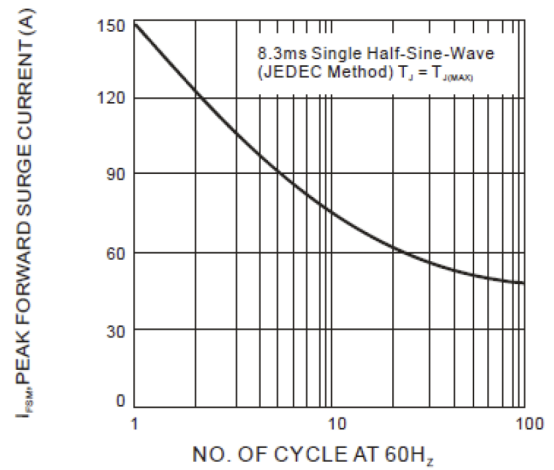


FIG.3 – TYPICAL REVERSE CHARACTERISTIC

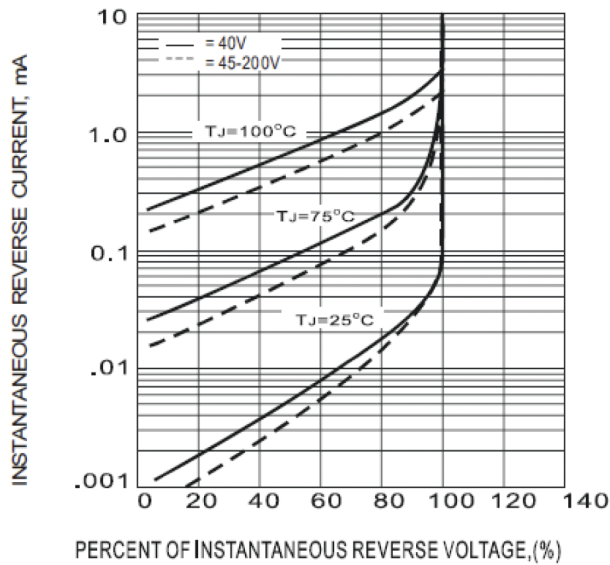


FIG.4 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

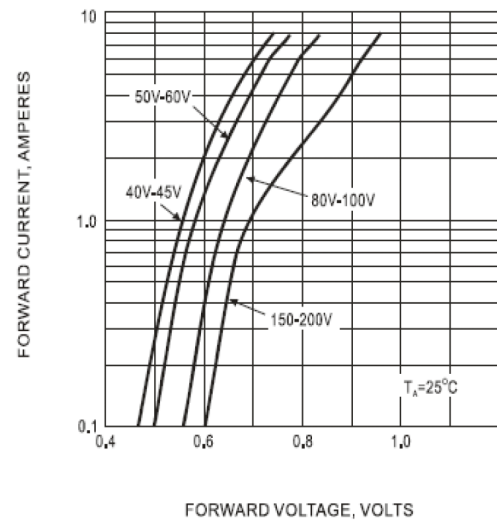


FIG.5 – TYPICAL TOTAL CAPACITANCE

