


DIP SWITCH SDHN(F) SERIES

1.6mm
Half Pitch Type



2018

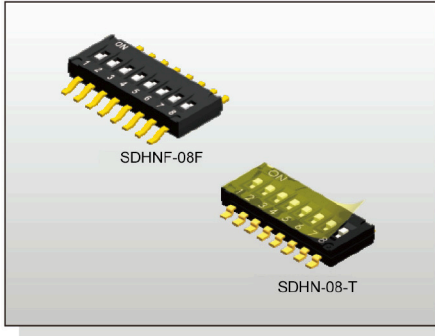

FEATURES

- ※Low profile 1.6mm height
- ※Gold contact for high reliability
- ※Top tape type for washing process


APPLICATION

- ※Industrial control
- ※Automatic machines control
- ※NB, electronic devices


SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	500gf max.
Travel	0.6mm
Operating Life	1,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

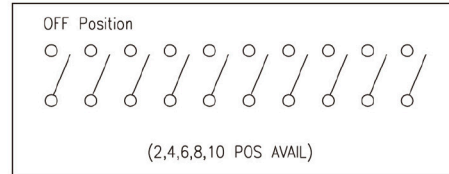

HOW TO ORDER




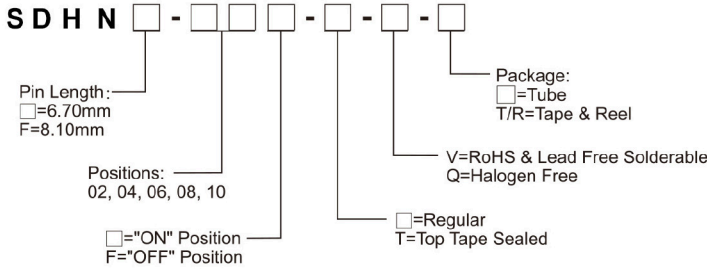


PACKAGE

- <Tube>
 SDHN(F)-02: 125 pcs
 SDHN(F)-04: 75 pcs
 SDHN(F)-06: 54 pcs
 SDHN(F)-08: 40 pcs
 SDHN(F)-10: 33 pcs
- <Tape & Reel>
 SDHN: 4000 pcs
 SDNF: 2500 pcs

DIP SWITCH

SDHN

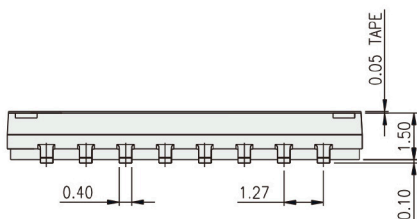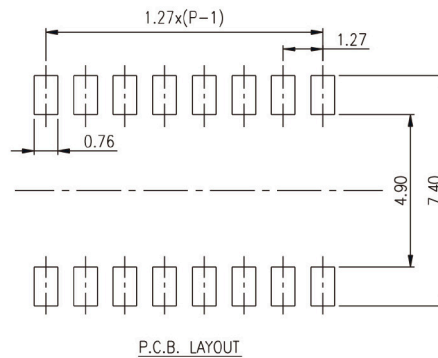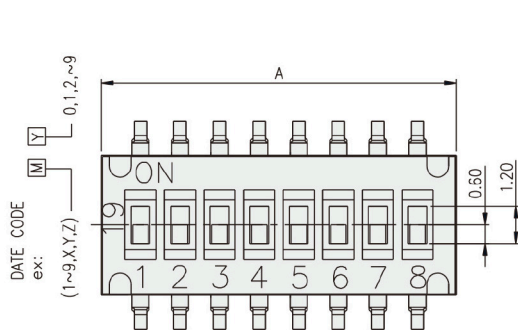

PART NO.	NO.OF POS	DIM A
SDHN-02	2	3.77
SDHN-04	4	6.31
SDHN-06	6	8.85
SDHN-08	8	11.39
SDHN-10	10	13.93




DIP SWITCH
SDHN(F) SERIES

1.6mm
 Half Pitch Type




SDHNF

DIP SWITCH

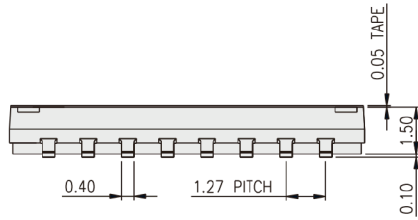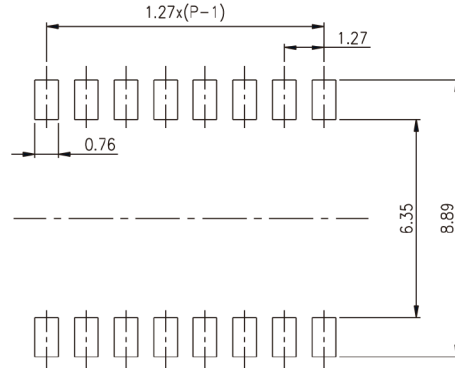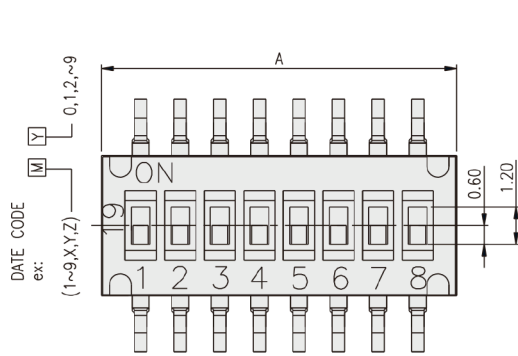

P.C.B. LAYOUT



PART NO.	NO. OF POS	DIM A
SDHNF-02	2	3.77
SDHNF-04	4	6.31
SDHNF-06	6	8.85
SDHNF-08	8	11.39
SDHNF-10	10	13.93