

特点 Features

- 极低漏电特性。Extremely low leakage current.
- 适用于电视机频道转换或小信号输入回路。
Used in TVs frequency channel conversion or weak signal import loop circuits.
- RoHS指令已对应完毕。Adapted to the RoHS directive.




主要技术性能 Specifications

项目 Items	特性 Characteristics																											
使用温度范围 Operating Temperature Range	-40~+85°C																											
额定电压范围 Rated Voltage Range	6.3~100 V																											
标称容量范围 Nominal Capacitance Range	0.1~2200μF																											
标称容量允许偏差 Nominal Capacitance Tolerance	±20% (120Hz, +20°C)																											
漏电流 Leakage Current	$I \leq 0.002CV$ (μA)或0.4 (μA) 2分钟(at 20°C, after 2 minutes) 取较大者 (whichever is greater)																											
损耗角正切值(tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <tr> <td>U_R (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tgδ</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> </tr> </table>	U_R (V)	6.3	10	16	25	35	50	63	100	tgδ	0.28	0.24	0.20	0.16	0.14	0.12	0.12	0.10									
	U_R (V)	6.3	10	16	25	35	50	63	100																			
tgδ	0.28	0.24	0.20	0.16	0.14	0.12	0.12	0.10																				
容量大于1000μF者, 每增加1000μF, 其损耗角正切值增加0.02 When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase.																												
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>U_R (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	U_R (V)	6.3	10	16	25	35	50	63	100	Z-25°C / Z+20°C	4	3	2	1.5	1.5	1.5	1.5	1.5	Z-40°C / Z+20°C	8	6	4	4	3	3	3	3
	U_R (V)	6.3	10	16	25	35	50	63	100																			
Z-25°C / Z+20°C	4	3	2	1.5	1.5	1.5	1.5	1.5																				
Z-40°C / Z+20°C	8	6	4	4	3	3	3	3																				
+85°C 施加含额定纹波电流的额定电压2000小时, 恢复16小时后: After applying rated voltage with specified ripple current for 2000 hours at +85°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value																												
耐久性 Load Life																												
高温贮存 Shelf Life	+85°C, 1000小时贮存后, 加额定工作电压处理30分钟, 恢复16小时后: After storage for 1000 hours at +85°C, U_R to be applied for 30 minutes and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value																											

频率修正系数 Frequency Coefficient

F(Hz)	60	120	1K	≥10K
0.1~22	0.8	1	1.5	1.7
33~100	0.8	1	1.4	1.5
220~2200	0.8	1	1.3	1.35

外形图及尺寸表 Case Size Table

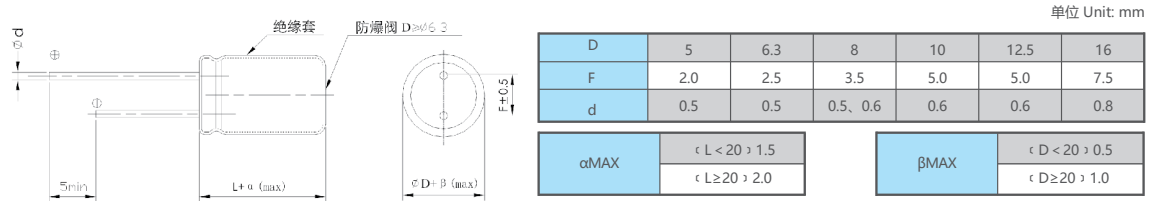

尺寸 Dimensions

CAP(μF) \ WV		6.3V(0J)		10V(1A)		16V(1C)		25V(1E)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7	4R7							5×11	38
6.8	6R8					5×11	36	5×11	47
10	100					5×11	43	5×11	52
15	150					5×11	48	5×11	58
22	220			5×11	52	5×11	62	5×11	68
33	330			5×11	68	5×11	70	5×11	78
47	470			5×11	76	5×11	105	6.3×11	120
100	101	5×11	75	5×11	105	6.3×11	140	8×11.5	150
220	221	6.3×11	135	8×11.5	195	8×11.5	225	10×12.5	255
330	331	6.3×11	165	8×11.5	260	8×11.5	270	10×12.5	355
470	471	8×11.5	260	8×11.5	320	10×12.5	410	10×20	520
1000	102	10×12.5	390	10×20	680	12.5×20	760	12.5×25	1020
2200	222	12.5×20	670	12.5×20	860	16×25	1200		

CAP(μF) \ WV		35V(1V)		50V(1H)		63V(1J)		100V(2A)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1			5×11	8	5×11	8		
0.22	R22			5×11	9	5×11	9		
0.47	R47			5×11	10	5×11	10		
1.0	010			5×11	17	5×11	17		
2.2	2R2			5×11	26	5×11	26	6.3×11	30
3.3	3R3			5×11	30	5×11	32	6.3×11	36
4.7	4R7	5×11	34	5×11	36	5×11	40	6.3×11	45
6.8	6R8	5×11	41	5×11	43	5×11	45	6.3×11	58
10	100	5×11	48	5×11	52	6.3×11	58	8×11.5	65
22	220	6.3×11	72	6.3×11	78	6.3×11	95	8×11.5	105
33	330	6.3×11	83	6.3×11	100	8×11.5	110	10×12.5	125
47	470	6.3×11	125	8×11.5	140	8×11.5	152	10×12.5	160
68	680	6.3×11	140	8×11.5	145	10×12.5	160	10×16	180
100	101	8×11.5	185	10×12.5	220	10×16	260	12.5×20	380
220	221	10×12.5	330	10×20	380	12.5×20	440		
330	331	10×16	440	10×20	460	12.5×25	600		
470	471	12.5×20	590	12.5×25	710				
680	681	12.5×20	620						

Size φD×L(mm)

Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

Product symbol system for Aluminum Electrolytic Capacitors



① Series

Series is represented by a two-letter code. For example "SGR" .

② Voltage

Voltage in volts(V) is represented by a one-digit and one-letter code.
Example:

Voltage(V)	2.5	4	6.3	10	16	25	35	50	63	80	100
Code	0E	0G	0J	1A	1C	1E	1V	1H	1J	1K	2A

Voltage(V)	160	200	250	315	350	400	420	450	500	550
Code	2C	2D	2E	2F	2V	2G	2M	2W	2H	2L

③ Capacitance

Capacitance in μF is represented by a three-digit code,the first two digis are significant and the third digit indicates the number of zeros following the significant figure "R" represents the decimal point for capacitance under $10\mu\text{F}$.

Example:

Capacitance(μF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000
Code	0R1	R47	010	4R7	100	470	101	471	102	472	103

④ Tolerance

Tolerance is represented by a one-letter code.

Example:

Tolerance(%)	-5~+5	-10~+10	-15~+15	-20~+20	-0~+20	-5~+20	-10~+20	-0~+30	+10~+30	-10~+30	-15~+20
Code	J	K	Y	M	R	H	V	F	G	Q	E

⑤ Size code

Size code is represented by a one-letter and three-digit code. The first one-letter indicate case diameter in mm .The last three digits indicate case length in mm .When the height of a product exceeds 100mm, if the last digit is 0,it is represented by A, otherwise, it is represented by B .

Example:

ΦD	4	5	6.3	8	10	12	12.5	13	16	18	20	22	25	30	35	40	50	63.5	89
Code	B	C	E	F	G	H	I	J	L	M	O	P	Q	R	S	T	U	W	Y

L	5	5.4	9	10	11	11.5	12	14	16	20	25	50	100	105	110	115	120	200	205
Code	050	054	090	100	110	115	120	140	160	200	250	500	10A	10B	11A	11B	12A	20A	20B

Note:When a case size is required and not shown in the table ,please contact with us for further discussion.

⑥ Terminal Code

Terminal Code is represented by a combination of letters or numbers

SMD Type terminal code (please refer to page11)

Radial type terminal code (please refer to page 12~15)

Snap-in Type and ScrewType terminal code(please refer to page 16~17)

Note:When a terminal code is required and not shown in the table ,please contact with us for further discussion.

⑦ Brand

The Surge trademark is represented by the letter "S" .

⑧ Sleeve

The sleeve material is represented by the letter E for PET and V for PVC.

⑨ Other

It is represented by a letter or number for rubber shape or other information.

⑩ Supplement Code

For special control purposes.

For example: SGR 16V 2200 μF 20% 12.5×25 taping F=5.0 Brand: Surge PVC Sleeve

S	G	R	1	C	2	2	2	M	I	2	5	0	B	5	0	S	V	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为准使用。

The contents recorded in the catalogue might be changed without any reminder.Please ask for providing the datasheet and take it as standard when purchasing.

010