


特点 Features

- 低阻抗。
Low ESR.
- 可适于无铅焊。
Lead free-fiow is supported.
- RoHS指令已对应完毕。
Adapted to the RoHS directive.

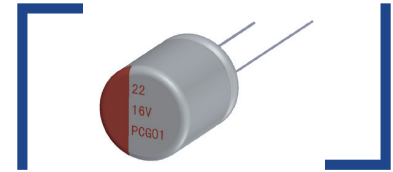


主要技术性能 Specifications

项目 Items	特性 Characteristics					
工作温度范围 Operating Temperature Range	-55~+105°C					
额定电压范围 Rated Voltage Range	2.5~25V					
标称电容量范围 Nominal Capacitance Range	6.8~3300μF					
标称电容量允许偏差 Nominal Capacitance Tolerance	±20% (20°C, 120Hz)					
漏电流 Leakage Current	参照规格表 Reference parameter table 2分钟 at 20°C, after 2 minutes					
损耗角正切 (tgδ) Dissipation Factor (Max)	20°C, 120Hz	直径 tgδ	Φ5~Φ5.45 0.10	Φ6.3(L≤7) 0.10	Φ6.3 (L>7) 0.08	Φ8~Φ10 0.08
等效串联电阻 ESR	参照规格表 Reference parameter table (mΩ at 100k~300kHz 20°C max)					
高低温特性比 Characteristics of impedance ratio at high temp. and low temp	要求在100KHZ 20°C Based the value at 100KHZ. +20°C		-55°C +105°C	Z/Z20°C Z/Z20°C	0.75 to 1.25 0.75 to 1.25	
耐久性 Load Life	+105°C施加额定电压2000小时后, 待温度恢复到20°C后进行测试, 电容器应满足以下要求: After 2000 hours' application of rated voltage at 105°C, and then being stabilized at +20°C, the capacitors shall meet the following requirement:					
	电容量变化率 Capacitance Change	±20%初始值以内 Within ±20% of the initial value (16V: within ±25% of the initial value)				
	损耗角正切 Dissipation Factor	≤150%初始规定值 Not more than 150% of the initial specified value				
	阻抗 Equivalent Series Resistance	≤150%初始规定值 Not more than 150% of the initial specified value				
稳态湿热 Damp heat(Steady state)	60°C, 90~95% RH, 不加电压1000小时 60°C, 90~95% RH, 1000 hours, No-applied voltage.					
	电容量变化率 Capacitance Change	±20%初始值以内 Within ±20% of the initial value (16V: within ±25% of the initial value)				
	损耗角正切 Dissipation Factor	≤150%初始规定值 Not more than 150% of the initial specified value				
	阻抗 Equivalent Series Resistance	≤150%初始规定值 Not more than 150% of the initial specified value				
耐焊接热 Resistance to Soldering Heat	(VPS) (260°C X 10s)					
	电容量变化率 Capacitance Change	±10%初始值以内 Within ±10% of the initial value (16V以上: within ±15% of the initial value)				
	损耗角正切 Dissipation Factor	≤初始规定值 Not more than the initial specified value				
	阻抗 Equivalent Series Resistance	≤初始规定值 Not more than the initial specified value				
漏电流 Leakage Current	≤初始规定值 Not more than the initial specified value					

※ 当产生疑问的时候, 用以下电压处理后测定。
电压处理: 125°C下, 连续加载120 分钟电压。加载电压为额定电压。
When in doubt, apply the following voltage treatment and measure.
Voltage processing: under the condition of 125 °C ambient temperature, continuous load voltage of 120 minutes. Load voltage is rated voltage.

尺寸图 Dimensions

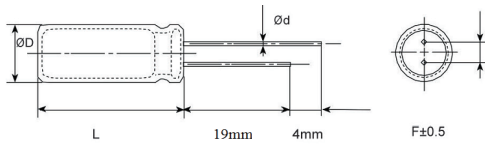

尺寸表 Size List

单位 Unit: mm

D(+0.5max)	5	5.45	6.3		8	10
F(±0.5)	2.0	2.5	2.5		3.5	5
d(±0.05)	0.5	0.5	0.5	0.6	0.6	0.6
L	+1max					

标称电容量、额定电压、额定纹波电流与尺寸对应表 Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

Rated Volt. (V)	Capacitance (µF)	Size ØD×L(mm)	Tanδ (120HZ,20°C)	LC (µA)	ESR (mΩ/at 100k~300kHz 20°C max)	Rated R. C. (mA/rms at 100kHz, 105°C)
2.5	330	5×7	0.1	165	15	3100
	330	5×8	0.1	165	15	3100
	390	5.45×7	0.1	195	15	3300
	470	5×8	0.1	235	15	3100
	470	5×9	0.1	235	15	3100
	470	6.3×6	0.1	235	15	3300
	560	5×9	0.1	280	15	3300
	560	5.45×9	0.1	280	15	3900
	560	6.3×8	0.08	280	7	5400
	680	5.45×9	0.1	340	15	4100
	820	6.3×8	0.08	410	7	5400
	820	8×8	0.08	410	7	6100
	1000	6.3×9	0.08	500	7	5400
	1000	8×8	0.08	500	7	6100
	1000	8×11.5	0.08	500	7	6100
	1500	8×8	0.08	750	7	6100
	1500	8×11.5	0.08	750	7	6100
	1500	10×12	0.08	750	7	6100
2200	10×12	0.08	1100	7	6100	
3300	10×12	0.08	1650	7	6100	
4	330	5×7	0.1	264	15	3100
	330	5×8	0.1	264	15	3100
	390	5.45×7	0.1	312	15	3300
	470	5×8	0.1	376	15	3100
	470	5×9	0.1	376	15	3300
	560	5×9	0.1	448	15	3300
	560	5.45×9	0.1	448	15	3300
	560	6.3×8	0.08	448	8	5400
	680	5.45×9	0.1	544	15	4700
	820	6.3×8	0.08	656	8	5400
	1000	6.3×9	0.08	800	7	5400
	1200	8×8	0.08	960	7	6100
	1500	8×8	0.08	1200	7	6100
	1500	8×11.5	0.08	1200	7	6100

Rated Volt. (V)	Capacitance (uF)	Size ΦD×L(mm)	Tanδ (120HZ,20°C)	LC (μA)	ESR (mΩ/at 100k~300kHz 20°C max)	Rated R. C. (mA/rms at 100kHz, 105°C)
6.3	100	5×7	0.1	126	15	3300
	220	5×7	0.1	277	15	3300
	220	5.45×7	0.1	277	15	3300
	220	6.3×5.4	0.1	277	15	3100
	270	5×7	0.1	340	15	3300
	270	5.45×7	0.1	340	15	3300
	270	6.3×5.4	0.1	340	15	3100
	330	5×8	0.1	415	15	3300
	330	6.3×6	0.1	415	15	3300
	390	5×8	0.1	491	15	3300
	470	5×9	0.1	592	15	3300
	470	5.45×9	0.1	592	15	3900
	470	6.3×6	0.1	592	15	3700
	470	6.3×8	0.08	592	8	4700
	470	8×8	0.08	592	7	5400
	500	5×9	0.1	630	15	3300
	560	5.45×9	0.1	705	15	3900
	560	6.3×8	0.08	705	8	4700
	560	8×8	0.08	705	7	5400
	680	6.3×8	0.08	856	8	4700
	680	8×8	0.08	856	7	5400
	820	6.3×8	0.08	1033	8	4700
	820	6.3×9	0.08	1033	8	4700
	820	8×8	0.08	1033	7	5400
	1000	6.3×10	0.08	1260	8	4700
	1000	8×8	0.08	1260	7	5400
	1000	8×11.5	0.08	1260	7	6100
	1200	8×8	0.08	1512	7	5400
	1200	8×11.5	0.08	1512	7	6100
	1500	8×11.5	0.08	1890	7	6100
1500	10×12	0.08	1890	7	6100	
2200	10×12	0.08	2772	7	6100	
3300	10×12	0.08	4158	7	6100	
7.5	270	5×7	0.1	405	15	3300
	330	5×8	0.1	495	15	3300
	330	5.45×7	0.1	495	15	3300
	390	5×9	0.1	585	15	3900
	470	5.45×9	0.1	705	15	3900
	470	6.3×8	0.08	705	8	4700
	500	5.45×9	0.1	750	15	3900
	560	6.3×8	0.08	840	8	4700
	560	8×8	0.08	840	8	4700
	680	6.3×9	0.08	1020	8	4700
680	8×8	0.08	1020	8	5100	

Rated Volt. (V)	Capacitance (uF)	Size ΦD×L(mm)	Tanδ (120HZ,20°C)	LC (μA)	ESR (mΩ/at 100k~300kHz 20°C max)	Rated R. C. (mA/rms at 100kHz, 105°C)
7.5	820	6.3×9	0.08	1230	8	4700
	820	8×8	0.08	1230	8	5400
	1000	6.3×11	0.08	1500	8	4700
	1000	8×8	0.08	1500	8	5400
	1500	8×11.5	0.08	2250	8	5700
10	100	5×7	0.1	200	15	3300
	150	5×7	0.1	300	15	3300
	150	6.3×5.4	0.1	300	15	2400
	220	5×8	0.1	440	15	3300
	220	5.45×7	0.1	440	15	3300
	270	6.3×6	0.1	540	15	3300
	330	5×9	0.1	660	15	3900
	330	5.45×9	0.1	660	15	3900
	330	6.3×8	0.08	660	10	4300
	390	5.45×9	0.1	780	15	3900
	470	6.3×9	0.08	940	10	4300
	470	8×8	0.08	940	10	4700
	560	6.3×9	0.08	1120	10	4300
	560	6.3×10	0.08	1120	10	4300
	560	8×8	0.08	1120	10	4700
	680	6.3×11	0.08	1360	10	4300
	680	8×8	0.08	1360	10	4700
	820	8×11.5	0.08	1640	10	5400
	1000	8×11.5	0.08	2000	10	5400
	1200	10×12	0.08	2400	10	5400
1500	10×12	0.08	3000	10	5400	
16	47	5×7	0.1	150	20	2200
	68	5×7	0.1	217	20	2200
	82	5×7	0.1	262	20	2200
	100	5×7	0.1	320	20	3100
	100	5×8	0.1	320	20	3100
	100	5.45×7	0.1	320	20	3100
	100	6.3×5.4	0.1	320	20	3100
	100	6.3×8	0.08	320	10	4100
	150	5×9	0.1	480	15	3300
	180	6.3×6	0.1	576	20	3900
	220	5.45×9	0.1	704	15	3900
	220	6.3×8	0.08	704	10	4700
	270	5.45×9	0.1	864	15	3900
	270	6.3×8	0.08	864	10	4700
	330	6.3×9	0.08	1056	10	4700
	330	8×8	0.08	1056	10	5100
	390	6.3×9	0.08	1248	10	4700
	470	6.3×10	0.08	1504	10	4700
470	8×8	0.08	1504	10	5100	

Rated Volt. (V)	Capacitance (uF)	Size ΦD×L(mm)	Tanδ (120HZ,20°C)	LC (μA)	ESR (mΩ/at 100k~300kHz 20°C max)	Rated R. C. (mA/rms at 100kHz, 105°C)
16	470	8×11.5	0.08	1540	10	5100
	560	8×8	0.08	1792	10	5100
	560	8×11.5	0.08	1792	10	5400
	680	8×11.5	0.08	2176	10	5400
	820	8×11.5	0.08	2624	10	5400
	820	10×12	0.08	2624	10	5400
	1000	10×12	0.08	3200	10	5400
20	1200	10×12	0.08	3840	10	5400
	47	6.3×5.4	0.1	188	25	2200
	68	6.3×5.4	0.1	272	25	2200
	82	6.3×5.4	0.1	328	25	2200
	100	6.3×8	0.08	400	24	2300
	220	8×8	0.08	880	24	2600
	330	8×11.5	0.08	1320	24	3900
	390	8×11.5	0.08	1560	20	3900
	470	8×11.5	0.08	1880	20	3900
	560	8×11.5	0.08	2240	20	3900
	680	10×12	0.08	2720	20	3900
25	820	10×12	0.08	3280	20	3900
	1000	10×12	0.08	4000	20	3900
	6.8	6.3×5.4	0.1	100	35	2100
	10	6.3×5.4	0.1	100	35	2100
	22	6.3×5.4	0.1	110	35	2100
	33	6.3×5.4	0.1	165	35	2100
	47	6.3×6	0.1	235	30	2300
	56	6.3×6	0.1	280	30	2300
	68	6.3×8	0.08	340	25	2600
	82	6.3×8	0.08	410	25	2600
	100	8×11.5	0.08	500	24	3900
	220	8×11.5	0.08	1100	24	3900
	270	8×11.5	0.08	1350	24	3900
330	8×11.5	0.08	1650	24	3900	
390	10×12	0.08	1950	24	3900	
470	10×12	0.08	2350	24	3900	

Product symbol system for Aluminum Electrolytic Capacitors



① Series

Series is represented by a two-letter code. For example "SGR" .

② Voltage

Voltage in volts(V) is represented by a one-digit and one-letter code.
Example:

Voltage(V)	2.5	4	6.3	10	16	25	35	50	63	80	100
Code	0E	0G	0J	1A	1C	1E	1V	1H	1J	1K	2A

Voltage(V)	160	200	250	315	350	400	420	450	500	550
Code	2C	2D	2E	2F	2V	2G	2M	2W	2H	2L

③ Capacitance

Capacitance in μF is represented by a three-digit code,the first two digis are significant and the third digit indicates the number of zeros following the significant figure "R" represents the decimal point for capacitance under $10\mu\text{F}$.
Example:

Capacitance(μF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000
Code	0R1	R47	010	4R7	100	470	101	471	102	472	103

④ Tolerance

Tolerance is represented by a one-letter code.
Example:

Tolerance(%)	-5~+5	-10~+10	-15~+15	-20~+20	-0~+20	-5~+20	-10~+20	-0~+30	+10~+30	-10~+30	-15~+20
Code	J	K	Y	M	R	H	V	F	G	Q	E

⑤ Size code

Size code is represented by a one-letter and three-digit code. The first one-letter indicate case diameter in mm .The last three digits indicate case length in mm .When the height of a product exceeds 100mm, if the last digit is 0,it is represented by A, otherwise, it is represented by B .
Example:

ΦD	4	5	6.3	8	10	12	12.5	13	16	18	20	22	25	30	35	40	50	63.5	89
Code	B	C	E	F	G	H	I	J	L	M	O	P	Q	R	S	T	U	W	Y

L	5	5.4	9	10	11	11.5	12	14	16	20	25	50	100	105	110	115	120	200	205
Code	050	054	090	100	110	115	120	140	160	200	250	500	10A	10B	11A	11B	12A	20A	20B

Note:When a case size is required and not shown in the table ,please contact with us for further discussion.

⑥ Terminal Code

Terminal Code is represented by a combination of letters or numbers
SMD Type terminal code (please refer to page11)
Radial type terminal code (please refer to page 12~15)
Snap-in Type and ScrewType terminal code(please refer to page 16~17)
Note:When a terminal code is required and not shown in the table ,please contact with us for further discussion.

⑦ Brand

The Surge trademark is represented by the letter "S" .

⑧ Sleeve

The sleeve material is represented by the letter E for PET and V for PVC.

⑨ Other

It is represented by a letter or number for rubber shape or other information.

⑩ Supplement Code

For special control purposes.

For example: SGR 16V 2200 μF 20% 12.5×25 taping F=5.0 Brand: Surge PVC Sleeve

S	G	R	1	C	2	2	2	M	I	2	5	0	B	5	0	S	V	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为准使用。
The contents recorded in the catalogue might be changed without any reminder.Please ask for providing the datasheet and take it as standard when purchasing.

010