




◆ **DIMENSIONS (mm)**

Terminal Code :K6 (ø35)

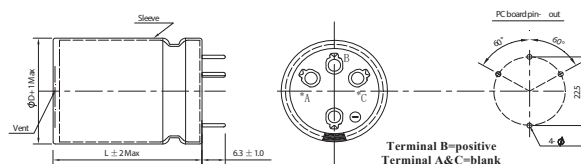

◆ **PART NUMBER SYSTEM(Example : 450V 470μF)**

Special Request

Size code(3551 : 35×51)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (470μF)

Voltage code (450V)

Series code (SPG)

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 105℃

200									220								
Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35		Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×30	1010							220	22×30	900						
330	22×35	1150							270	22×30	950						
390	22×40	1210	25×30	1200					330	22×35	1200	25×30	1150				
470	22×45	1330	25×35	1320					390	22×40	1300	25×35	1320				
560	22×50	1470	25×40	1460	30×30	1460			470	22×45	1520	25×40	1400	30×30	1350		
680			25×45	1620	30×35	1630			560	22×50	1610	25×45	1510	30×35	1510		
820			25×50	1780	30×40	1830	35×30	1820	680			25×50	1710	30×40	1660	35×30	1620
1000					30×45	2100	35×35	2100	820					30×45	1820	35×35	1760
1200					30×50	2410	35×40	2420	1000					30×50	2160	35×40	2140
1500							35×50	2810	1200							35×45	2520
1800									1500							35×50	2960

250									400								
Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35		Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
120									68	22×25	470						
150									82	22×25	580						
180									100	22×30	640	25×25	640				
220	22×30	910							120	22×35	690	25×30	680				
270	22×35	1050							150	22×40	810	25×30	810	30×25	750		
330	22×40	1170	25×35	1160					180	22×45	900	25×35	890	30×30	870		
390	22×45	1360	25×40	1330	30×30	1360			220	22×50	1010	25×40	1000	30×35	1000	35×30	1000
470	22×50	1460	25×45	1430	30×35	1510			270			25×50	1100	30×40	1100	35×30	1110
560			25×50	1640	30×40	1640			330					30×45	1310	35×35	1310
680					30×45	1820	35×35	1820	390					30×50	1410	35×40	1420
820					30×50	1990	35×40	2030	470							35×45	1530
1000							35×45	2140	560							35×50	1680
1200							35×50	2760	680							35×55	1880

420									450								
Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35		Vdc ΦD uF	Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	460							68	22×25	490						
82	22×30	590	25×25	600					82	22×30	590						
100	22×35	630	25×30	620					100	22×35	640	25×30	640	30×25	580		
120	22×40	670	25×30	700	30×25	750			120	22×40	690	25×35	690	30×25	670		
150	22×45	790	25×35	800	30×30	770			150	22×45	810	25×40	810	30×30	740	35×25	690
180	22×50	880	25×40	870	30×30	890			180	22×50	900	25×45	870	30×35	840	35×30	790
220			25×45	990	30×35	1050	35×30	980	220			25×50	1010	30×40	940	35×30	970
270			25×50	1270	30×40	1100	35×35	1080	270					30×45	1070	35×35	1080
330					30×45	1260	35×40	1230	330					30×50	1210	35×40	1250
390					30×50	1380	35×45	1350	390							35×45	1380
470							35×50	1450	470							35×50	1560
560							35×55	1650	560								

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 105°C

Vdc ΦD uF	500							
	Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
47	22×25	420						
56	22×30	560						
68	22×35	610	25×25	550				
82	22×40	720	25×30	590				
100	22×45	770	25×35	680	30×25	630		
120	22×50	820	25×40	730	30×30	720		
150			25×45	820	30×35	800	35×25	790
180			25×50	940	30×40	910	35×30	900
220					30×45	980	35×35	1010
270					30×50	1170	35×40	1180
330							35×45	1300
390							35×50	1420

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
200 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 500	0.80	1.00	1.10	1.12	1.15