


特点 Features


- 宽温度, 105°C, 4000~10000小时。
Wide temperature range, 105°C, long life: 4000~10000 hours.
- RoHS指令已对应完毕。
Adapted to the RoHS directive.

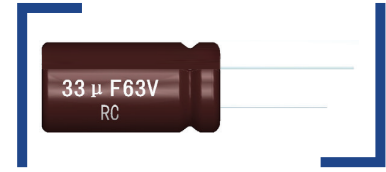

主要技术性能 Specifications

项目 Items	特性 Performance Characteristics							
使用温度范围 Operating Temperature Range	-40~+105°C							
额定电压范围 Rated Voltage Range	6.3~63V							
标称电容容量范围 Nominal Capacitance Range	2.2~18000μF							
标称电容容量允许偏差 Capacitance Tolerance	± 20% (120Hz, +20°C)							
漏电流 Leakage Current	I ≤ 0.01CV (μA) 或 3μA 2分钟 取较大者 (at 20°C, after 2 minute) (Whichever is greater)							
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	U _R (V)	6.3	10	16	25	35	50	63
	tgδ	0.22	0.19	0.16	0.14	0.12	0.12	0.10
容量大于1000μF者, 每增加1000μF, 其损耗角正切值增加0.02 When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase.								
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	U _R (V)	6.3	10	16	25	35	50	63
	Z-25°C / Z+20°C	3	3	3	3	3	3	3
	Z-40°C / Z+20°C	3	3	3	3	3	3	3
耐久性 Load Life	ΦD	Φ5, 6.3	Φ8, 10	≥ Φ12.5				
	6.3~10(V)	4,000 hours	6,000 hours	8,000 hours				
	16~100(V)	5,000 hours	7,000 hours	10,000 hours				
+105°C加额定电压4000~10000小时, 恢复16小时后: After applying rated voltage for 4000~10000 hours at +105°C and then resumed for 16 hours: 电容变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤The initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value								
高温贮存 Shelf Life	+105°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +105°C and then resumed for 16 hours: 电容变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value							

外形图及尺寸表 Case Size Table

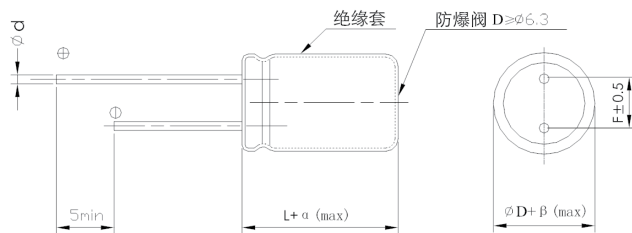

D	5	6.3	8	10	12.5	16~18
F	2.0	2.5	3.5	5.0	5.0	7.5
d	0.5		0.5, 0.6		0.6	0.8

频率修正系数 Frequency Coefficient

Freq.(Hz)	120	1K	10K	≥100K
CAP(μF)				
Below 4.7	0.42	0.70	0.80	1.00
5.6~33	0.50	0.73	0.90	1.00
34~330	0.55	0.77	0.95	1.00
331~1000	0.60	0.80	0.96	1.00
1200 Above	0.70	0.85	0.98	1.00

单位 Unit: mm

αMAX	< L < 20 > 1.5
	< L ≥ 20 > 2.0

βMAX	< D < 20 > 0.5
	< D ≥ 20 > 1.0

尺寸 Dimensions

CAP(μF)		WV	6.3V(0J)			10V(1A)			16V(1C)			25V(1E)		
			Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple
47	470										5×11	0.67	150	
56	560							5×11	0.58	150				
100	101		5×11	0.59	200	5×11	0.58	210			6.3×11	0.35	280	
120	121									6.3×11	0.22	340		
150	151		5×11	0.58	210									
220	221					6.3×11	0.25	340				8×11.5	0.20	480
330	331		6.3×11	0.25	340				8×11.5	0.20	520	10×12.5	0.11	760
470	471					8×11.5	0.18	460	10×12.5	0.18	760	10×16	0.10	1250
									6.3×15	0.18	540	10×20	0.09	1400
680	681		8×11.5	0.11	640	8×16	0.11	680	10×16	0.08	1250	10×16	0.09	1250
												10×20	0.08	1400
820	821		10×12.5	0.08	865							10×20	0.072	1400
1000	102		8×16	0.087	840	8×20	0.083	1150	10×20	0.078	1400	10×20	0.068	1400
						10×16	0.085	1250				12.5×15	0.07	1450
1200	122		10×16	0.060	1210	10×20	0.046	1400	10×25	0.05	1540			
1500	152		10×20	0.046	1400	10×25	0.042	1650	12.5×20	0.045	1820	12.5×25	0.040	2060
2200	222		10×25	0.042	1650	10×30	0.036	1800	12.5×25	0.034	1960	16×25	0.032	2540
3300	332		12.5×20	0.035	1900	12.5×25	0.030	2230	12.5×35	0.029	2500	18×25	0.027	3140
3900	392		12.5×25	0.030	2230	12.5×30	0.028	2650	16×25	0.025	2630	18×30	0.025	3400
4700	472		12.5×30	0.027	2650	12.5×35	0.025	2880	16×30	0.024	3100	18×35	0.023	3900
6800	682		16×25	0.024	2930	18×25	0.023	3140	16×40	0.022	3800			
8200	822		16×30	0.023	3450	18×30	0.021	4170	18×35	0.020	3950			
10000	103		16×35	0.021	3610	18×35	0.020	4220	18×40	0.019	4000			
15000	153		18×35	0.020	4220									
18000	183		18×40	0.018	4280									

CAP(μF)		WV	35V(1V)			50V(1H)			63V(1J)		
			Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple
2.2	2R2					5×11	3.5	43			
3.3	3R3					5×11	3.2	53			
4.7	4R7					5×11	3.1	78			
6.8	6R8					5×11	3.0	82			
10	100					5×11	2.0	98			
22	220		5×11	1.5	110	5×11	1.5	110			
33	330		5×11	1.2	125	6.3×11	1.0	158	6.3×11	0.55	180
56	560		6.3×11	0.50	210				8×11.5	0.42	350
82	820								10×12.5	0.20	820
100	101					8×11.5	0.29	500			
120	121					8×16	0.15	530	10×16	0.18	1200
150	151		8×11.5	0.28	380	10×12.5	0.16	820			
220	221		10×12.5	0.16	650	10×16	0.11	1200	10×25	0.18	1540
270	271		8×20	0.15	1150	10×20	0.078	1400	12.5×20	0.18	1820
330	331		10×16	0.14	1200	10×25	0.072	1540	12.5×25	0.079	1950
470	471		8×20	0.13	1180	12.5×20	0.063	1820	12.5×30	0.065	2150
			10×20	0.12	1400						
680	681		12.5×20	0.072	1820	12.5×30	0.058	2150	16×25	0.062	2600
820	821					12.5×35	0.050	2230	18×25	0.050	2800
1000	102		12.5×25	0.060	1950	16×25	0.048	2400	16×35	0.042	2900
1200	122		12.5×30	0.055	2650	18×25	0.040	2680	16×40	0.038	3400
1500	152		12.5×35	0.042	2880	16×35	0.035	2900	18×35	0.030	3400
2200	222		16×30	0.031	3000	18×35	0.030	3680	18×40	0.027	3500
3300	332		16×40	0.026	3200						

Size φD×L(mm)
 Maximum Allowable Ripple Current (mA rms) at 105°C 100KHz
 Maximum ESR (Ω) at 20°C 100KHz

Product symbol system for Aluminum Electrolytic Capacitors



① Series

Series is represented by a two-letter code. For example "SGR" .

② Voltage

Voltage in volts(V) is represented by a one-digit and one-letter code.
Example:

Voltage(V)	2.5	4	6.3	10	16	25	35	50	63	80	100
Code	0E	0G	0J	1A	1C	1E	1V	1H	1J	1K	2A

Voltage(V)	160	200	250	315	350	400	420	450	500	550
Code	2C	2D	2E	2F	2V	2G	2M	2W	2H	2L

③ Capacitance

Capacitance in μF is represented by a three-digit code.the first two digis are significant and the third digit indicates the number of zeros following the significant figure "R" represents the decimal point for capacitance under $10\mu\text{F}$.
Example:

Capacitance(μF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000
Code	0R1	R47	010	4R7	100	470	101	471	102	472	103

④ Tolerance

Tolerance is represented by a one-letter code.
Example:

Tolerance(%)	-5~+5	-10~+10	-15~+15	-20~+20	-0~+20	-5~+20	-10~+20	-0~+30	+10~+30	-10~+30	-15~+20
Code	J	K	Y	M	R	H	V	F	G	Q	E

⑤ Size code

Size code is represented by a one-letter and three-digit code. The first one-letter indicate case diameter in mm .The last three digits indicate case length in mm .When the height of a product exceeds 100mm, if the last digit is 0,it is represented by A, otherwise, it is represented by B .
Example:

ΦD	4	5	6.3	8	10	12	12.5	13	16	18	20	22	25	30	35	40	50	63.5	89
Code	B	C	E	F	G	H	I	J	L	M	O	P	Q	R	S	T	U	W	Y

L	5	5.4	9	10	11	11.5	12	14	16	20	25	50	100	105	110	115	120	200	205
Code	050	054	090	100	110	115	120	140	160	200	250	500	10A	10B	11A	11B	12A	20A	20B

Note:When a case size is required and not shown in the table ,please contact with us for further discussion.

⑥ Terminal Code

Terminal Code is represented by a combination of letters or numbers
SMD Type terminal code (please refer to page11)
Radial type terminal code (please refer to page 12~15)
Snap-in Type and ScrewType terminal code(please refer to page 16~17)
Note:When a terminal code is required and not shown in the table ,please contact with us for further discussion.

⑦ Brand

The Surge trademark is represented by the letter "S" .

⑧ Sleeve

The sleeve material is represented by the letter E for PET and V for PVC.

⑨ Other

It is represented by a letter or number for rubber shape or other information.

⑩ Supplement Code

For special control purposes.

For example: SGR 16V 2200 μF 20% 12.5×25 taping F=5.0 Brand: Surge PVC Sleeve

S	G	R	1	C	2	2	2	M	I	2	5	0	B	5	0	S	V	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为准使用。
The contents recorded in the catalogue might be changed without any reminder.Please ask for providing the datasheet and take it as standard when purchasing.

010