

特点 Features


- 耐高纹波, 耐高温, 特长寿命, 105°C 10000小时。
High Ripple Current High Temperature, extremely Long Life, Life time 105°C 10000 hours.
- 专为节能灯, 电子镇流器设计制造。
Specially designed for electronic ballast and energy-save lamp.
- RoHS指令已对应完毕。
Adapted to the RoHS directive.



主要技术性能 Specifications

项目 Items	特性 Characteristics					
使用温度范围 Operating Temperature Range	-40~+105°C					
额定电压范围 Rated Voltage Range	200~450V					
标称容量范围 Nominal Capacitance Range	1~100μF					
标称容量允许偏差 Capacitance Tolerance	± 20% (120Hz, +20°C)					
漏电流 Leakage Current	I ≤ 0.02 CV + 10μA (2分钟, 20°C) (at 20°C, after 2 minutes) C: 标称容量Capacitance (μF); V: 额定电压Rated voltage range (V)					
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	U _R (V)	200	250	350	400	450
	tgδ	0.15	0.15	0.20	0.20	0.20
温度特性(阻抗比/ 120Hz) Temperature Characteristics (Impedance ratio at 120Hz)	U _R (V)	200	250	350	400	450
	Z-40°C / Z+20°C	6	6	7	7	9
耐久性 Load Life	<p>在+105°C条件下, 施加含额定纹波电流的额定电压, 持续规定时间, 并在+20°C下恢复16小时后, 电容器应符合下列要求: The following specifications shall be met when the capacitors are restored to +20°C for 16 hours after D.C. bias rated ripple current is applied at +105°C, the peak voltage shall not exceed the voltage.</p> <p>持续时间 Time : 10000 小时 容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value</p>					
高温贮存 Shelf Life	<p>+105°C 1000小时贮存后, 恢复16小时后 After storage for 1000 hours at +105°C and then resumed for 16 hours:</p> <p>容量变化率 : ±20%初始测量值以内 ±20% of the initial measured value Leakage current : ≤2倍初始规定值 ≤2 times of the initial specified value Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value</p>					

外形图及尺寸表 Case Size Table

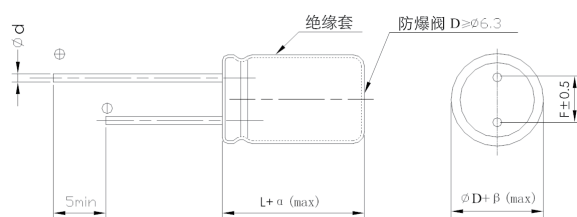

单位 Unit: mm

D	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0	5.0	7.5	7.5
d	0.5	0.5、0.6	0.6	0.6	0.8	0.8

αMAX	< L < 20 > 1.5
	< L ≥ 20 > 2.0

βMAX	0.5
------	-----

允许纹波电流的修正系数 Coefficient of Allowable Ripple Current

频率Frequency (Hz)	50	120	1K	10K	100K
修正系数Coefficient	0.40	0.50	0.80	0.90	1.00

尺寸 Dimensions

容量 CR(μF)	代码 Code	电压 UR	200V(2D)		250V(2E)		350V(2V)		400V(2G)		450V(2W)	
			Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
			φD×L(mm)	(mA)	φD×L(mm)	(mA)	φD×L(mm)	(mA)	φD×L(mm)	(mA)	φD×L(mm)	(mA)
1	010		6.3×11	55	6.3×11	55	6.3×11	60	6.3×11	70	8×11.5	80
									8×11.5	75		
1.2	1R2		6.3×11	58	6.3×11	58	6.3×11	65	6.3×11	75	8×11.5	83
									8×11.5	75		
1.5	1R5		6.3×11	65	6.3×11	65	6.3×11	90	6.3×11	75	8×11.5	85
									8×11.5	80		
1.8	1R8		6.3×11	75	6.3×11	75	6.3×11	93	8×11.5	90	8×11.5	90
2.2	2R2		6.3×11	80	6.3×11	80	6.3×15	95	6.3×15	90	8×16	95
									8×11.5	100		
2.7	2R7		6.3×11	85	6.3×11	85	8×11.5	100	8×11.5	105	8×16	100
									8×16	113		
3.3	3R3		6.3×15	90	6.3×15	90	8×11.5	110	8×16	115	8×16	110
					8×11.5	90						
3.9	3R9		6.3×15	95	6.3×15	95	8×16	115	8×16	120		
4.7	4R7		6.3×15	100	8×11.5	115	8×16	130	8×16	135	10×16	130
			8×11.5	115			10×12.5	130	8×20	150		
5.6	5R6		6.3×15	120	8×11.5	125	8×20	160	10×16	160	10×20	170
			8×11.5	125					8×20	160		
6.8	6R8		8×11.5	140	8×16	155	10×16	250	10×16	190	10×20	210
			8×16	155								
8.2	8R2		8×16	165	8×16	165	10×16	275	10×20	230	10×20	230
10	100		8×16	260	8×20	260	10×20	285	10×20	290	10×25	315
			10×12.5	270					10×25	300		
15	150		10×16	410	10×16	410	12.5×20	450	12.5×20	375	12.5×20	410
18	180		10×20	430	10×20	430	12.5×20	480	16×20	420	16×20	480
22	220		10×20	530	10×25	530	16×20	650	12.5×25	430	16×25	530
									16×20	500		
33	330		12.5×20	580	12.5×25	580	16×25	850	16×25	590	16×30	660
47	470		12.5×25	660	16×20	660	18×25	1080	16×30	750	18×30	850
									18×25	810		
68	680		16×25	830	16×30	830	18×30	1170	18×30	900		
82	820		18×25	980	18×25	980						
100	101		18×30	1100	18×30	1100						

●额定纹波电流Rated ripple current (mA,+105°C,100KHz)

Product symbol system for Aluminum Electrolytic Capacitors



① Series

Series is represented by a two-letter code. For example "SGR" .

② Voltage

Voltage in volts(V) is represented by a one-digit and one-letter code.
Example:

Voltage(V)	2.5	4	6.3	10	16	25	35	50	63	80	100
Code	0E	0G	0J	1A	1C	1E	1V	1H	1J	1K	2A

Voltage(V)	160	200	250	315	350	400	420	450	500	550
Code	2C	2D	2E	2F	2V	2G	2M	2W	2H	2L

③ Capacitance

Capacitance in μF is represented by a three-digit code,the first two digis are significant and the third digit indicates the number of zeros following the significant figure "R" represents the decimal point for capacitance under $10\mu\text{F}$.

Example:

Capacitance(μF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000
Code	0R1	R47	010	4R7	100	470	101	471	102	472	103

④ Tolerance

Tolerance is represented by a one-letter code.

Example:

Tolerance(%)	-5~+5	-10~+10	-15~+15	-20~+20	-0~+20	-5~+20	-10~+20	-0~+30	+10~+30	-10~+30	-15~+20
Code	J	K	Y	M	R	H	V	F	G	Q	E

⑤ Size code

Size code is represented by a one-letter and three-digit code. The first one-letter indicate case diameter in mm .The last three digits indicate case length in mm .When the height of a product exceeds 100mm, if the last digit is 0,it is represented by A, otherwise, it is represented by B .

Example:

ΦD	4	5	6.3	8	10	12	12.5	13	16	18	20	22	25	30	35	40	50	63.5	89
Code	B	C	E	F	G	H	I	J	L	M	O	P	Q	R	S	T	U	W	Y

L	5	5.4	9	10	11	11.5	12	14	16	20	25	50	100	105	110	115	120	200	205
Code	050	054	090	100	110	115	120	140	160	200	250	500	10A	10B	11A	11B	12A	20A	20B

Note:When a case size is required and not shown in the table ,please contact with us for further discussion.

⑥ Terminal Code

Terminal Code is represented by a combination of letters or numbers

SMD Type terminal code (please refer to page11)

Radial type terminal code (please refer to page 12~15)

Snap-in Type and ScrewType terminal code(please refer to page 16~17)

Note:When a terminal code is required and not shown in the table ,please contact with us for further discussion.

⑦ Brand

The Surge trademark is represented by the letter "S" .

⑧ Sleeve

The sleeve material is represented by the letter E for PET and V for PVC.

⑨ Other

It is represented by a letter or number for rubber shape or other information.

⑩ Supplement Code

For special control purposes.

For example: SGR 16V 2200 μF 20% 12.5×25 taping F=5.0 Brand: Surge PVC Sleeve

S	G	R	1	C	2	2	2	M	I	2	5	0	B	5	0	S	V	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为准使用。

The contents recorded in the catalogue might be changed without any reminder.Please ask for providing the datasheet and take it as standard when purchasing.

010