

**FEATURES**

- ※Single In-line Packaging saves PCB space
- ※Available in vertical or right angle models


**APPLICATION**

- ※Industrial control
- ※Computers and peripherals
- ※Variety of function controls

**SPECIFICATION**

Contact Rating	10mA, 5V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	800gf max.
Operating Life	500 cycles
Operating Temp.	-30°C ~ +80°C
Storage Temp.	-30°C ~ +80°C

**CIRCUIT**

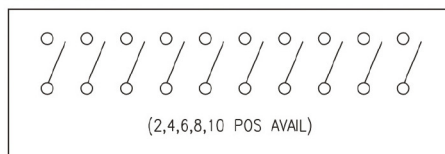


**PACKAGE**

**<Tube>**


SSIP-02A: 56 pcs	SSIP-02T: 61 pcs
SSIP-04A: 35 pcs	SSIP-04T: 37 pcs
SSIP-06A: 25 pcs	SSIP-06T: 26 pcs
SSIP-08A: 20 pcs	SSIP-08T: 20 pcs
SSIP-10A: 16 pcs	SSIP-10T: 17 pcs

**HOW TO ORDER**

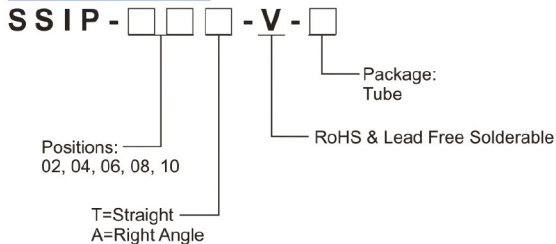


DIP SWITCH

**SSIP-A**

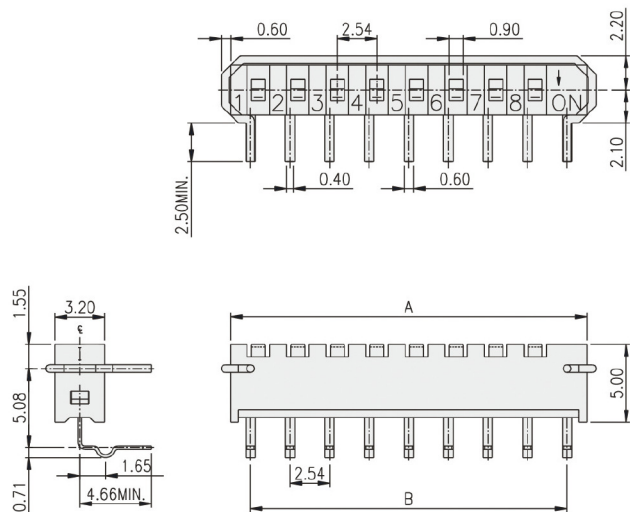


PART NO.	NO.OF POS.	DIM.A	DIM.B
SSIP-02	2	7.62	5.08
SSIP-04	4	12.70	10.16
SSIP-06	6	17.78	15.24
SSIP-08	8	22.86	20.32
SSIP-10	10	27.94	25.40





P.C.B. LAYOUT

SSIP-T

DIP SWITCH



PART NO.	NO. OF POS.	DIM. A	DIM. B
SSIP-02	2	7.62	5.08
SSIP-04	4	12.70	10.16
SSIP-06	6	17.78	15.24
SSIP-08	8	22.86	20.32
SSIP-10	10	27.94	25.40

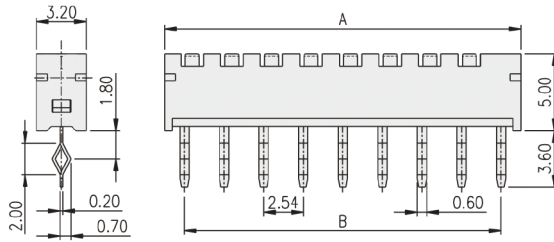

P.C.B. LAYOUT