

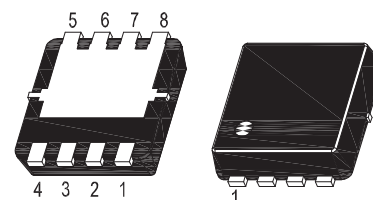
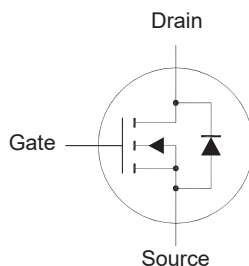
N-Channel Enhancement Mode MOSFET

Features

- Excellent $R_{DS(ON)}$ and Low Gate Charge
- Halogen and Antimony Free(HAF), RoHS compliant

Applications

- Motor/Body Load Control
- DC-DC converters



1. Source 2. Source 3. Source 4. Gate
5. Drain 6. Drain 7. Drain 8. Drain
DFN3030 Plastic Package

Key Parameters

Parameter	Value	Unit
BV_{DSS}	30	V
$R_{DS(ON)}$ Max	18 @ $V_{GS} = 10\text{ V}$	$m\Omega$
	30 @ $V_{GS} = 4.5\text{ V}$	
$V_{GS(th)}$ typ	1.7	V
Q_g typ	12.7 @ $V_{GS} = 10\text{ V}$	nC

Absolute Maximum Ratings (at $T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Drain-Gate Voltage	V_{GS}	± 20	V
Drain Current - Continuous	I_D	27	A
		17	
Peak Drain Current, Pulsed ¹⁾	I_{DM}	80	A
Single Pulsed Avalanche Current	I_{AS}	13	A
Single Pulsed Avalanche Energy ²⁾	E_{AS}	8.45	mJ
Total Power Dissipation	P_{tot}	19	W
Operating Junction and Storage Temperature Range	T_j, T_{stg}	- 55 to + 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction to Case	$R_{\theta JC}$	6.5	$^\circ\text{C/W}$
Thermal Resistance from Junction to Ambient ³⁾	$R_{\theta JA}$	55	$^\circ\text{C/W}$

¹⁾ Pulse Test: Pulse Width $\leq 100\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$, Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}=150^\circ\text{C}$.

²⁾ Limited by $T_{J(MAX)}$, starting $T_j = 25^\circ\text{C}$, $L = 0.1\text{ mH}$, $R_g = 25\text{ }\Omega$, $I_{AS} = 13\text{ A}$, $V_{GS} = 10\text{ V}$.

³⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate in still air.

Characteristics at $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit
STATIC PARAMETERS					
Drain-Source Breakdown Voltage at $I_D = 250\ \mu\text{A}$	$V_{(BR)DSS}$	30	-	-	V
Drain-Source Leakage Current at $V_{DS} = 24\ \text{V}$	I_{DSS}	-	-	1	μA
Gate-Source Leakage Current at $V_{GS} = \pm 20\ \text{V}$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage at $V_{GS} = V_{DS}$, $I_D = 250\ \mu\text{A}$	$V_{GS(th)}$	1.2	-	2.5	V
Drain-Source On-State Resistance at $V_{GS} = 10\ \text{V}$, $I_D = 10\ \text{A}$ at $V_{GS} = 4.5\ \text{V}$, $I_D = 6\ \text{A}$	$R_{DS(on)}$	- -	14 -	18 30	m Ω
DYNAMIC PARAMETERS					
Forward Transconductance at $V_{DS} = 5\ \text{V}$, $I_D = 6\ \text{A}$	g_{fs}	-	7.6	-	S
Gate Resistance at $V_{GS} = 0\ \text{V}$, $V_{DS} = 0\ \text{V}$, $f = 1\ \text{MHz}$	R_g	-	1	-	Ω
Input Capacitance at $V_{GS} = 0\ \text{V}$, $V_{DS} = 15\ \text{V}$, $f = 1\ \text{MHz}$	C_{iss}	-	480	-	pF
Output Capacitance at $V_{GS} = 0\ \text{V}$, $V_{DS} = 15\ \text{V}$, $f = 1\ \text{MHz}$	C_{oss}	-	62	-	pF
Reverse Transfer Capacitance at $V_{GS} = 0\ \text{V}$, $V_{DS} = 15\ \text{V}$, $f = 1\ \text{MHz}$	C_{rss}	-	40	-	pF
Total Gate Charge at $V_{DS} = 15\ \text{V}$, $I_D = 10\ \text{A}$, $V_{GS} = 10\ \text{V}$ at $V_{DS} = 15\ \text{V}$, $I_D = 10\ \text{A}$, $V_{GS} = 4.5\ \text{V}$	Q_g	- -	12.7 6	- -	nC
Gate Source Charge at $V_{DS} = 15\ \text{V}$, $I_D = 10\ \text{A}$, $V_{GS} = 10\ \text{V}$	Q_{gs}	-	2	-	nC
Gate Drain Charge at $V_{DS} = 15\ \text{V}$, $I_D = 10\ \text{A}$, $V_{GS} = 10\ \text{V}$	Q_{gd}	-	3	-	nC
Turn-On Delay Time at $V_{DD} = 15\ \text{V}$, $V_{GS} = 10\ \text{V}$, $I_D = 10\ \text{A}$, $R_g = 4.7\ \Omega$	$t_{d(on)}$	-	8.5	-	ns
Turn-On Rise Time at $V_{DD} = 15\ \text{V}$, $V_{GS} = 10\ \text{V}$, $I_D = 10\ \text{A}$, $R_g = 4.7\ \Omega$	t_r	-	28	-	ns
Turn-Off Delay Time at $V_{DD} = 15\ \text{V}$, $V_{GS} = 10\ \text{V}$, $I_D = 10\ \text{A}$, $R_g = 4.7\ \Omega$	$t_{d(off)}$	-	7.8	-	ns
Turn-Off Fall Time at $V_{DD} = 15\ \text{V}$, $V_{GS} = 10\ \text{V}$, $I_D = 10\ \text{A}$, $R_g = 4.7\ \Omega$	t_f	-	1.5	-	ns
Body-Diode PARAMETERS					
Drain-Source Diode Forward Voltage at $I_S = 1\ \text{A}$, $V_{GS} = 0\ \text{V}$	V_{SD}	-	-	1	V
Body-Diode Continuous Current	I_S	-	-	27	A
Body-Diode Continuous Current, Pulsed	I_{SM}	-	-	80	A
Body Diode Reverse Recovery Time at $I_S = 10\ \text{A}$, $V_{DD} = 15\ \text{V}$, $di/dt = 100\ \text{A} / \mu\text{s}$	t_{rr}	-	6.3	-	ns
Body Diode Reverse Recovery Charge at $I_S = 10\ \text{A}$, $V_{DD} = 15\ \text{V}$, $di/dt = 100\ \text{A} / \mu\text{s}$	Q_{rr}	-	1.4	-	nC

Electrical Characteristics Curves

Fig. 1 Typical Output Characteristics

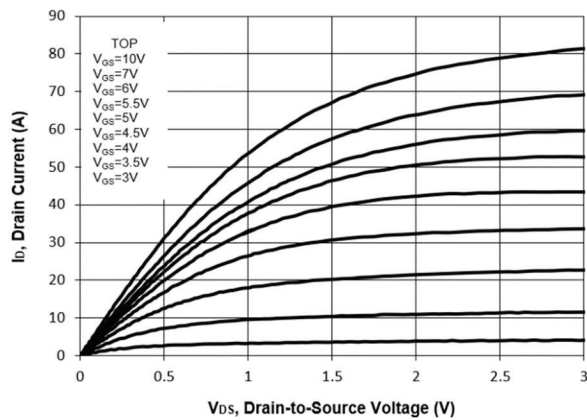


Fig. 2 Typical Transfer Characteristics

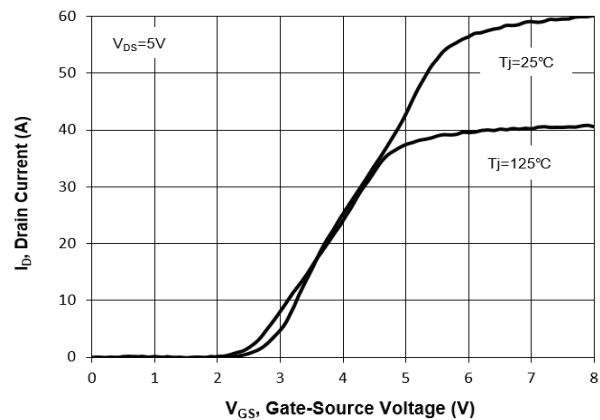


Fig. 3 on-Resistance vs Drain Current

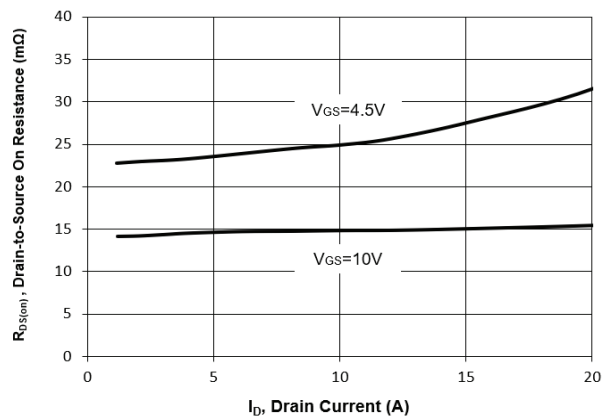


Fig. 4 on-Resistance vs. Gate to Source Voltage

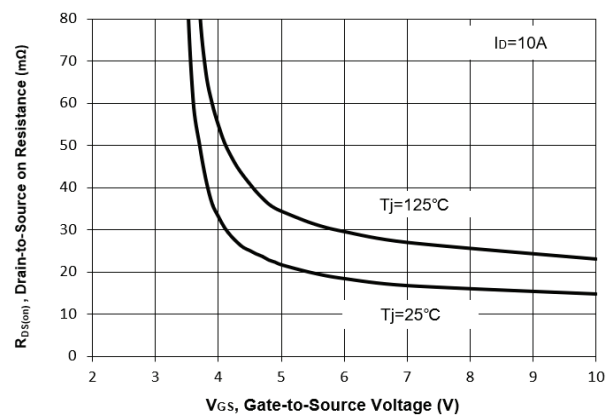


Fig. 5 on-Resistance vs. T_J


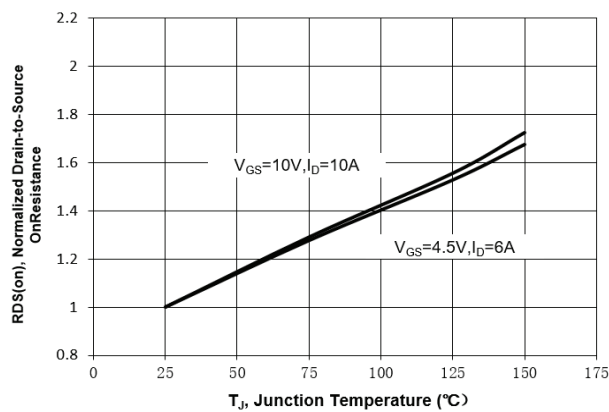


Fig. 6 Typical Body-Diode Forward Characteristics

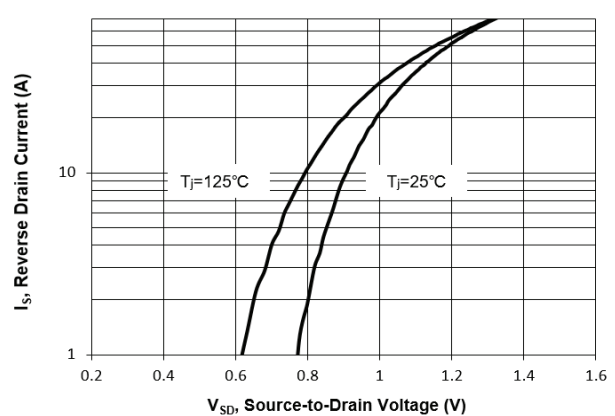

Electrical Characteristics Curves

Fig. 7 Typical Junction Capacitance

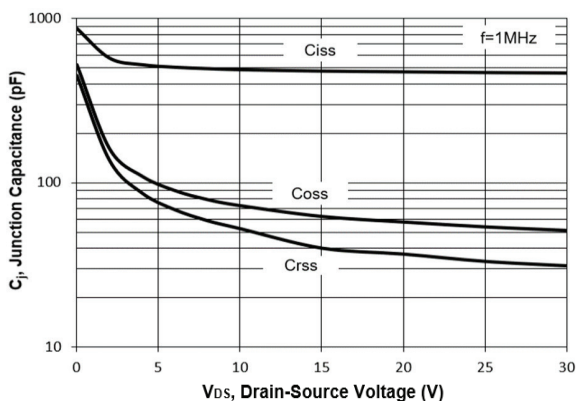


Fig. 8 Drain-Source Leakage Current vs. T_j

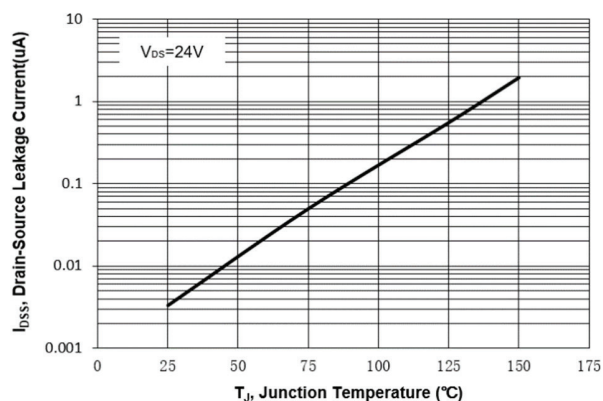


Fig. 9 $V_{(BR)DSS}$ vs. Junction Temperature

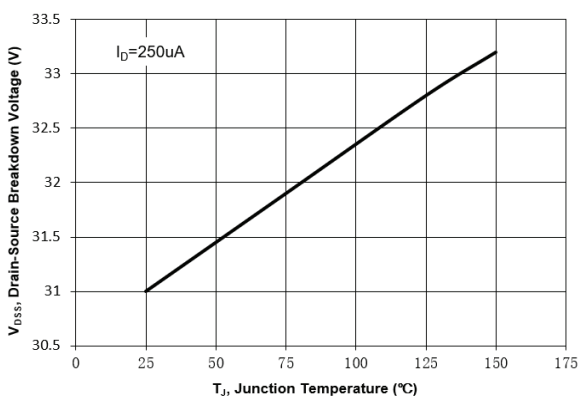


Fig. 10 Gate Threshold Variation vs. T_j

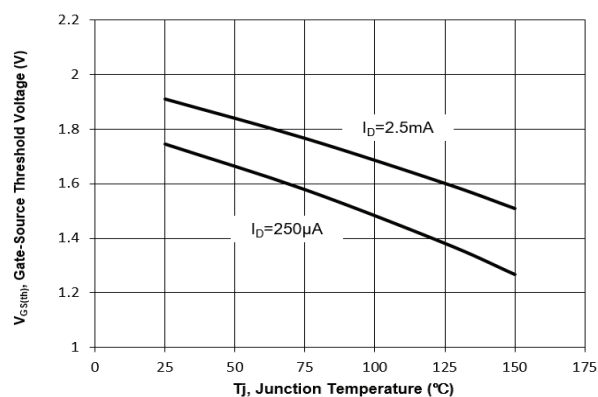


Fig. 11 Gate Charge


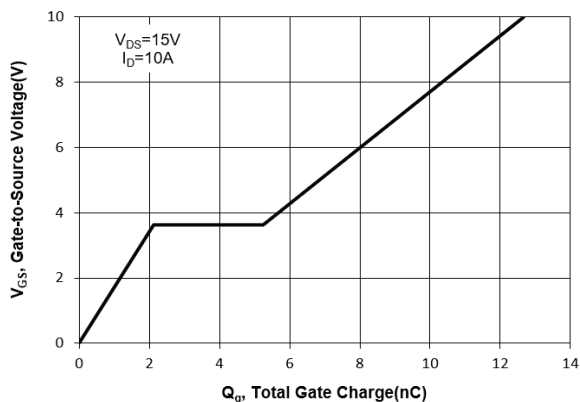


Fig. 12 Safe Operation Area

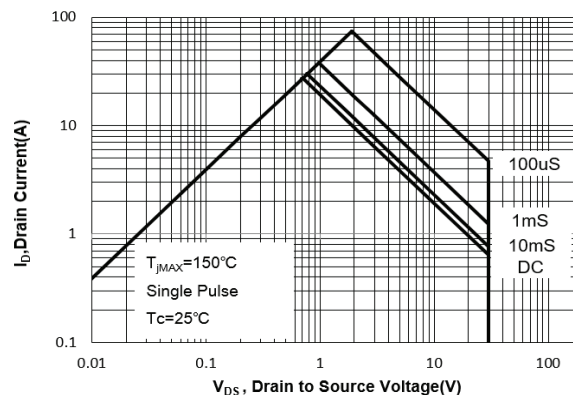

Electrical Characteristics Curves

Fig.13 Normalized Maximum Transient Thermal Impedance($z_{\theta JC}$)


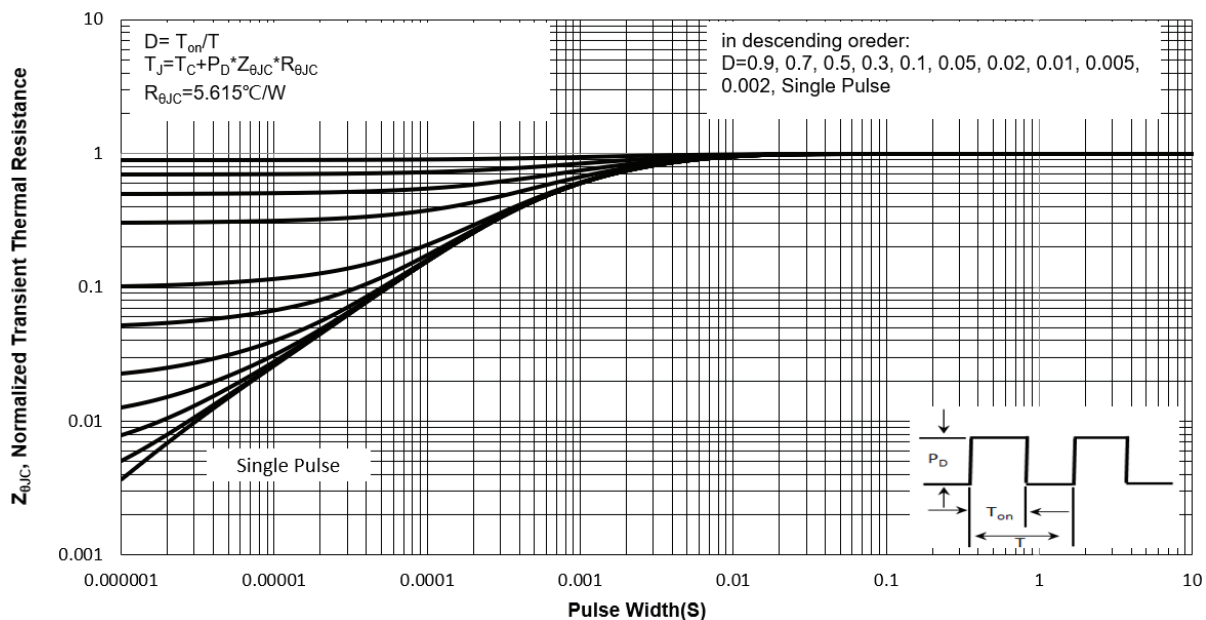
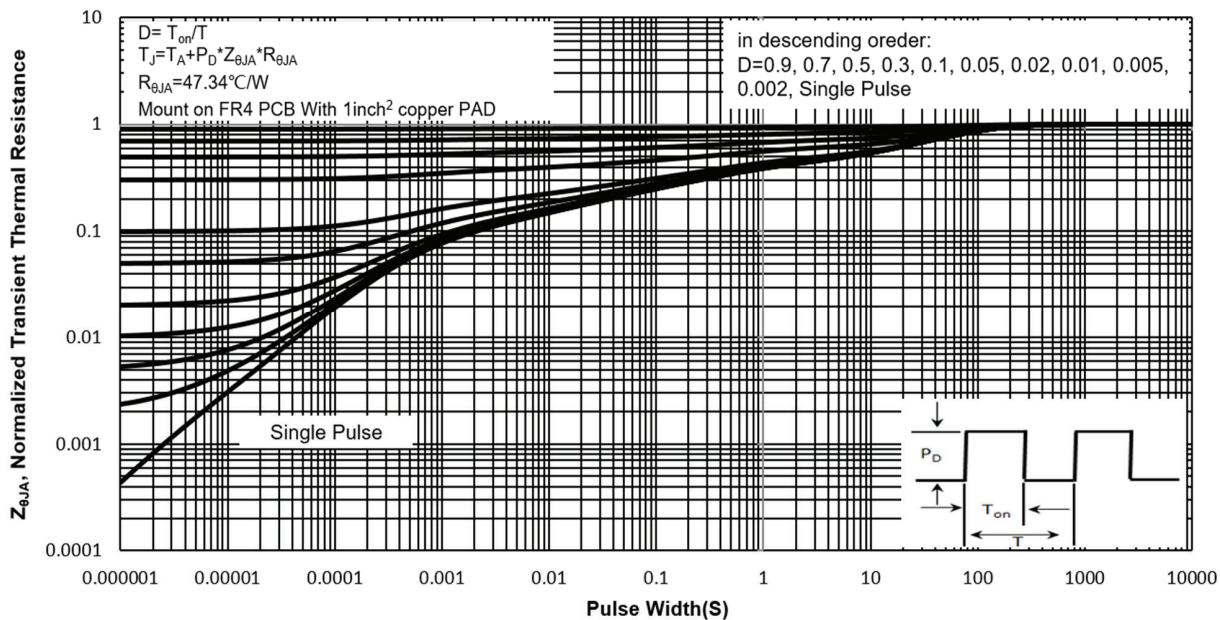
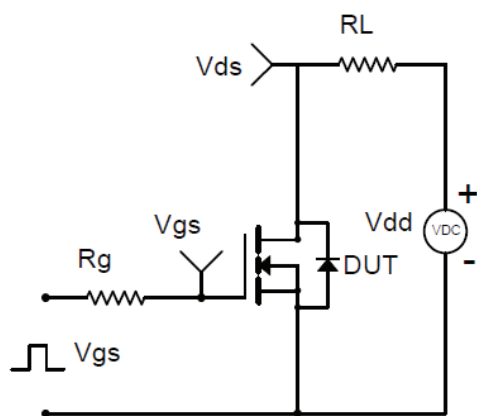
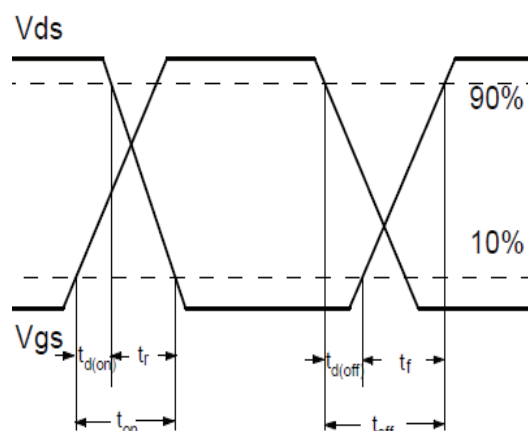
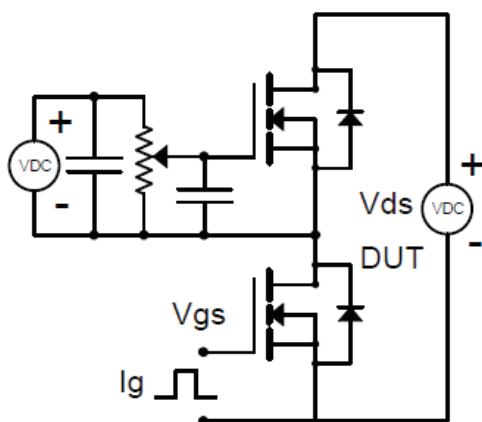
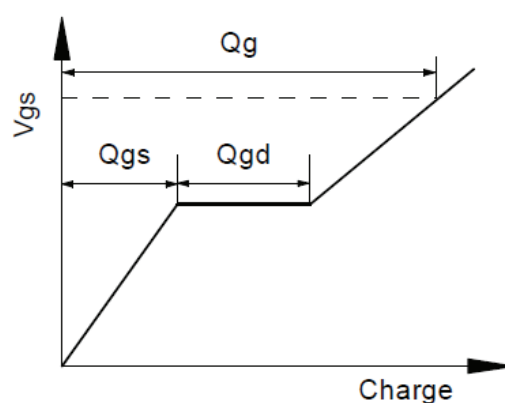
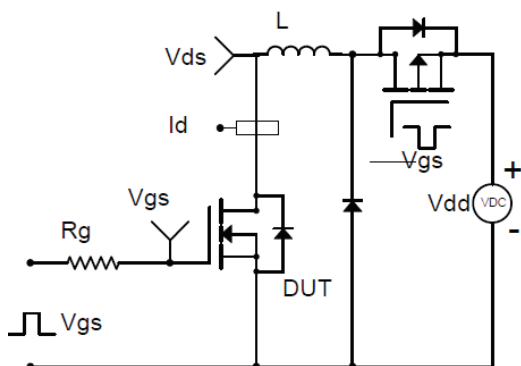



Fig.14 Normalized Maximum Transient Thermal Impedance($z_{\theta JA}$)

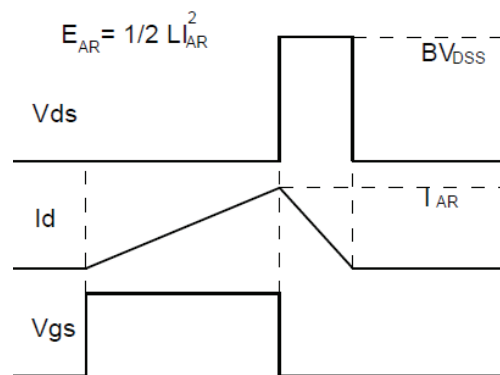

Test Circuits
Fig.1-1 Switching times test circuit

Fig.1-2 Switching Waveform

Fig.2-1 Gate charge test circuit

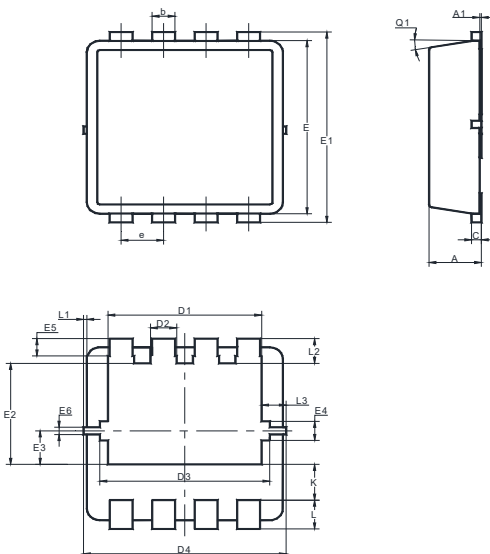Fig.2-2 Gate charge waveform

Fig.3-1 Avalanche test circuit

Fig.3-2 Avalanche waveform


Package Outline Dimensions (Units: mm)


DFN3030



UNIT	A	A1	b	c	D1	D2	D3	D4	E	E1	E2	E3	E4
mm	0.9	0.05	0.35	0.25	2.6	0.5	2.7	3.2	3.1	3.3	1.85	0.68	0.43
	0.7	0	0.24	0.1	2.4	0.3	2.5	3	2.9	3.1	1.65	0.48	0.23

UNIT	E5	E6	e	K	L	L1	L2	L3	θ1
mm	0.4	0.25	0.7	0.72	0.5	0.1	0.53	0.475	12°
	0.2	0.15	0.6	0.52	0.3	0	0.33	0.275	0°

Recommended Soldering Footprint



Packing information


Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
DFN3030	12	8 ± 0.1	0.315 ± 0.004	330	13	5,000

Marking information

" TM303N220LS " = Part No.

" ***** " = Date Code Marking

Font type: Arial



Disclaimer: Our company reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability, anytime without notice.