


## Features

- 105°C, 4,000 ~ 7,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS compliance

## Specifications

| Items  | Performance  |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|--|--|---|----------------------|------|---------|------|---------|--------|------|------|------|-----------------|---------------------------|------|------|------|------|-----------|------|------|------|-----|-------------|-----|------|------|-----|----------------|-----|------|------|-----|
| Category Temperature Range   | 6.3 ~ 63V  | 100V  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | -55°C ~ +105°C   | -40°C ~ +105°C  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Capacitance Tolerance  | ± 20 % (at 120 Hz, 20°C)   |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Leakage Current (at 20°C)  | I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes)<br>Where, C = rated capacitance in μF, V = rated DC working voltage in V   |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Tanδ (at 120 Hz, 20°C)   | <table border="1"> <tr> <th>Rated Voltage</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <th>Tanδ (max)</th> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table>   |   | Rated Voltage        | 6.3  | 10      | 16   | 25      | 35     | 50   | 63   | 100  | Tanδ (max)      | 0.22                      | 0.19 | 0.16 | 0.14 | 0.12 | 0.10      | 0.09 | 0.08 |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Rated Voltage  | 6.3   | 10                   | 16   | 25      | 35   | 50      | 63     | 100  |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Tanδ (max)   | 0.22   | 0.19  | 0.16                 | 0.14 | 0.12    | 0.10 | 0.09    | 0.08   |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.  |  |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Low Temperature Characteristics (at 120 Hz)  | Impedance ratio shall not exceed the values given in the table below.  |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | <table border="1"> <tr> <th>Rated Voltage</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <th>Impedance Ratio</th> <td>Z(-55°C/-40°C) / Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>  |   | Rated Voltage        | 6.3  | 10      | 16   | 25      | 35     | 50   | 63   | 100  | Impedance Ratio | Z(-55°C/-40°C) / Z(+20°C) | 3    | 3    | 3    | 3    | 3         | 3    | 3    |      |     |             |     |      |      |     |                |     |      |      |     |
| Rated Voltage  | 6.3  | 10  | 16                   | 25   | 35      | 50   | 63      | 100    |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Impedance Ratio  | Z(-55°C/-40°C) / Z(+20°C)  | 3   | 3                    | 3    | 3       | 3    | 3       | 3      |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Endurance  | Test Time  | 4,000 Hrs for φD ≤ 6.3 mm;<br>5,000 Hrs for φD = 8 mm;<br>6,000 Hrs for φD = 10 mm;<br>7,000 Hrs for φD ≥ 12.5 mm |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Capacitance Change   | Within ±25% of initial value  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Tanδ   | Less than 200% of specified value   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Leakage Current  | Within specified value  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| * The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 7,000 hours at 105°C. |  |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Shelf Life Test  | Test Time  | 1,000 Hrs   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Capacitance Change   | Within ±25% of initial value  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Tanδ   | Less than 200% of specified value   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | Leakage Current  | Within specified value  |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| * The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.                       |  |   |                      |      |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| Ripple Current and Frequency Multipliers   | <table border="1"> <tr> <th>Cap.(μF) \ Freq.(Hz)</th> <th>120</th> <th>1k</th> <th>10k</th> <th>100k up</th> </tr> <tr> <td>≤ ~ 33</td> <td>0.42</td> <td>0.70</td> <td>0.90</td> <td>1.0</td> </tr> <tr> <td>39 ~ 270</td> <td>0.5</td> <td>0.73</td> <td>0.92</td> <td>1.0</td> </tr> <tr> <td>330 ~ 680</td> <td>0.55</td> <td>0.77</td> <td>0.94</td> <td>1.0</td> </tr> <tr> <td>820 ~ 1,800</td> <td>0.6</td> <td>0.80</td> <td>0.96</td> <td>1.0</td> </tr> <tr> <td>2,200 ~ 15,000</td> <td>0.7</td> <td>0.85</td> <td>0.98</td> <td>1.0</td> </tr> </table> |   | Cap.(μF) \ Freq.(Hz) | 120  | 1k      | 10k  | 100k up | ≤ ~ 33 | 0.42 | 0.70 | 0.90 | 1.0             | 39 ~ 270                  | 0.5  | 0.73 | 0.92 | 1.0  | 330 ~ 680 | 0.55 | 0.77 | 0.94 | 1.0 | 820 ~ 1,800 | 0.6 | 0.80 | 0.96 | 1.0 | 2,200 ~ 15,000 | 0.7 | 0.85 | 0.98 | 1.0 |
|  | Cap.(μF) \ Freq.(Hz)   | 120   | 1k                   | 10k  | 100k up |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | ≤ ~ 33   | 0.42  | 0.70                 | 0.90 | 1.0     |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | 39 ~ 270   | 0.5   | 0.73                 | 0.92 | 1.0     |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | 330 ~ 680  | 0.55  | 0.77                 | 0.94 | 1.0     |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
|  | 820 ~ 1,800  | 0.6   | 0.80                 | 0.96 | 1.0     |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |
| 2,200 ~ 15,000   | 0.7  | 0.85  | 0.98                 | 1.0  |         |      |         |        |      |      |      |                 |                           |      |      |      |      |           |      |      |      |     |             |     |      |      |     |                |     |      |      |     |

## Diagram of Dimensions

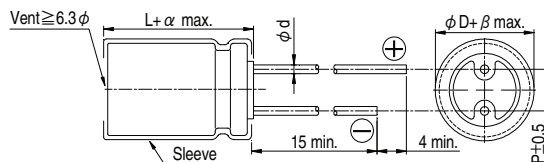


### Lead Spacing and Diameter

Unit: mm

| φD | 5                    | 6.3 | 8   | 10  | 12.5 | 16  | 18  |
|----|----------------------|-----|-----|-----|------|-----|-----|
| P  | 2.0                  | 2.5 | 3.5 | 5.0 | 5.0  | 7.5 | 7.5 |
| φd | 0.5                  |     | 0.6 |     |      | 0.8 |     |
| α  | L<20: 1.5, L≥20: 2.0 |     |     |     |      |     |     |
| β  | 0.5                  |     |     |     |      |     |     |

The case size of 16×20, 18×20 and 18×25 are suitable for below diagram:

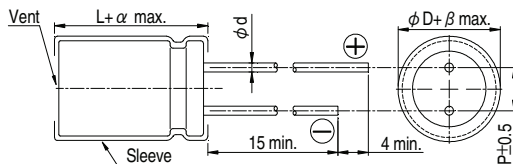

All product specifications in the catalog are subject to change without notice. (Cat. 2023E1)

157

Dimension:  $\phi$  D×L(mm)  
 Impedance:  $\Omega$ / at 100k Hz  
 Ripple Current: mA/rms at 105°C

Dimension and Permissible Ripple Current

| Rated Volt.<br>(Voc) | 6.3V (0J)        |  |                |                                     | 10V (1A)           |  |                |                                      | 16V (1C)           |  |                |                                      | 25V (1E)                  |  |                         |                                      |
|----------------------|------------------|--|----------------|-------------------------------------|--------------------|--|----------------|--------------------------------------|--------------------|--|----------------|--------------------------------------|---------------------------|--|-------------------------|--------------------------------------|
|                      | $\phi$ D×L       | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms,105°C) | $\phi$ D×L         | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms, 105°C) | $\phi$ D×L         | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms, 105°C) | $\phi$ D×L                | Impedance<br>( $\Omega$ , max./100kHz) |                         | Ripple<br>Current<br>(mA/rms, 105°C) |
|                      |                  | 20°C                                   | -10°C          | 100k Hz                             |                    | 20°C                                   | -10°C          | 100k Hz                              |                    | 20°C                                   | -10°C          | 100k Hz                              |                           | 20°C                                   | -10°C                   | 100k Hz                              |
| 4.7                  |                  |  |                |                                     |                    |  |                |                                      |                    |  |                |                                      | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 10                   |                  |  |                |                                     |                    |  |                |                                      | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 22                   | 5×11             | 0.6                                    | 1.2            | 180                                 | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 33                   | 5×11             | 0.6                                    | 1.2            | 180                                 | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 39                   |                  |  |                |                                     |                    |  |                |                                      |                    |  |                |                                      | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 47                   | 5×11             | 0.6                                    | 1.2            | 180                                 | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11               | 0.6                                    | 1.2            | 180                                  | 5×11                      | 0.6                                    | 1.2                     | 180                                  |
| 56                   |                  |  |                |                                     |                    |  |                |                                      | 5×11               | 0.6                                    | 1.2            | 180                                  |                           |  |                         |                                      |
| 82                   |                  |  |                |                                     | 5×11               | 0.6                                    | 1.2            | 180                                  |                    |  |                |                                      | 6.3×11                    | 0.25                                   | 0.50                    | 290                                  |
| 100                  | 5×11             | 0.6                                    | 1.2            | 180                                 | 5×11               | 0.6                                    | 1.2            | 180                                  | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 6.3×11                    | 0.25                                   | 0.50                    | 290                                  |
| 120                  |                  |  |                |                                     |                    |  |                |                                      | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 6.3×15                    | 0.23                                   | 0.46                    | 430                                  |
| 150                  | 6.3×11           | 0.25                                   | 0.5            | 290                                 | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 8×11.5                    | 0.117                                  | 0.234                   | 555                                  |
| 180                  |                  |  |                |                                     | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 6.3×15             | 0.23                                   | 0.46           | 430                                  |                           |  |                         |                                      |
| 220                  | 6.3×11           | 0.25                                   | 0.5            | 290                                 | 6.3×11             | 0.25                                   | 0.5            | 290                                  | 6.3×15             | 0.23                                   | 0.46           | 430                                  | 8×11.5                    | 0.117                                  | 0.234                   | 555                                  |
| 330                  | 6.3×11<br>6.3×15 | 0.25<br>0.23                           | 0.50<br>0.46   | 290<br>430                          | 8×11.5             | 0.117                                  | 0.234          | 555                                  | 8×11.5             | 0.117                                  | 0.234          | 555                                  | 8×15<br>10×12.5           | 0.085<br>0.090                         | 0.17<br>0.18            | 730<br>755                           |
| 470                  | 8×11.5           | 0.117                                  | 0.234          | 555                                 | 8×11.5             | 0.117                                  | 0.234          | 555                                  | 8×15<br>10×12.5    | 0.085<br>0.090                         | 0.17<br>0.18   | 730<br>755                           | 8×20<br>10×16             | 0.065<br>0.068                         | 0.130<br>0.136          | 995<br>1,050                         |
| 560                  | 8×11.5           | 0.117                                  | 0.234          | 555                                 |                    |  |                |                                      |                    |  |                |                                      | 10×20                     | 0.052                                  | 0.104                   | 1,220                                |
| 680                  | 10×12.5          | 0.090                                  | 0.180          | 755                                 | 8×15<br>10×12.5    | 0.085<br>0.090                         | 0.170<br>0.180 | 730<br>755                           | 8×20<br>10×16      | 0.065<br>0.068                         | 0.130<br>0.136 | 995<br>1,050                         | 10×20                     | 0.052                                  | 0.104                   | 1,220                                |
| 820                  | 8×15<br>10×12.5  | 0.085<br>0.090                         | 0.170<br>0.180 | 730<br>755                          |                    |  |                |                                      | 10×20              | 0.052                                  | 0.104          | 1,220                                | 10×25                     | 0.045                                  | 0.090                   | 1,440                                |
| 1,000                | 10×12.5          | 0.090                                  | 0.180          | 755                                 | 8×20<br>10×16      | 0.065<br>0.068                         | 0.130<br>0.136 | 995<br>1,050                         | 10×20              | 0.052                                  | 0.104          | 1,220                                | 10×30<br>12.5×20          | 0.035<br>0.038                         | 0.070<br>0.076          | 1,815<br>1,655                       |
| 1,200                | 8×20<br>10×16    | 0.065<br>0.068                         | 0.130<br>0.136 | 955<br>1,050                        | 10×20              | 0.052                                  | 0.104          | 1,220                                | 10×25              | 0.045                                  | 0.090          | 1,440                                |                           |  |                         |                                      |
| 1,500                | 10×20            | 0.052                                  | 0.104          | 1,220                               | 10×20<br>10×25     | 0.052<br>0.045                         | 0.104<br>0.090 | 1,220<br>1,440                       | 12.5×20<br>10×30   | 0.038<br>0.035                         | 0.076<br>0.070 | 1,655<br>1,815                       | 12.5×25<br>16×25          | 0.030<br>0.022                         | 0.060<br>0.044          | 1,945<br>2,555                       |
| 1,800                |                  |  |                |                                     |                    |  |                |                                      |                    |  |                |                                      | 12.5×30<br>16×20          | 0.025<br>0.029                         | 0.050<br>0.058          | 2,310<br>2,205                       |
| 2,200                | 10×25<br>12.5×20 | 0.045<br>0.038                         | 0.090<br>0.076 | 1,440<br>1,615                      | 10×30<br>12.5×20   | 0.035<br>0.038                         | 0.070<br>0.076 | 1,815<br>1,655                       | 12.5×25            | 0.030                                  | 0.06           | 1,945                                | 12.5×35<br>16×25<br>18×20 | 0.022<br>0.022<br>0.028                | 0.044<br>0.044<br>0.056 | 2,510<br>2,555<br>2,490              |
| 2,700                | 10×30            | 0.035                                  | 0.070          | 1,815                               | 12.5×25            | 0.030                                  | 0.060          | 1,945                                | 12.5×30<br>16×20   | 0.025<br>0.029                         | 0.05<br>0.058  | 2,310<br>2,205                       | 16×25                     | 0.022                                  | 0.044                   | 2,555                                |
| 3,300                | 12.5×20          | 0.038                                  | 0.076          | 1,655                               | 12.5×25<br>12.5×30 | 0.030<br>0.025                         | 0.060<br>0.050 | 1,945<br>2,310                       | 16×25<br>12.5×35   | 0.022<br>0.022                         | 0.044<br>0.044 | 2,555<br>2,510                       | 16×31.5<br>18×25          | 0.018<br>0.020                         | 0.036<br>0.040          | 3,010<br>2,740                       |
| 3,900                | 12.5×25          | 0.030                                  | 0.060          | 1,945                               | 12.5×35<br>16×20   | 0.022<br>0.029                         | 0.044<br>0.058 | 2,510<br>2,205                       | 16×25<br>18×20     | 0.022<br>0.028                         | 0.044<br>0.056 | 2,555<br>2,490                       | 16×35.5<br>18×31.5        | 0.016<br>0.016                         | 0.032<br>0.032          | 3,150<br>3,635                       |
| 4,700                | 12.5×30<br>16×25 | 0.025<br>0.022                         | 0.050<br>0.044 | 2,310<br>2,555                      | 16×25              | 0.022                                  | 0.044          | 2,555                                | 16×31.5<br>18×25   | 0.018<br>0.020                         | 0.036<br>0.040 | 3,010<br>2,740                       | 18×35.5                   | 0.015                                  | 0.030                   | 3,680                                |
| 5,600                | 12.5×35<br>16×20 | 0.022<br>0.029                         | 0.044<br>0.058 | 2,510<br>2,205                      | 16×25<br>18×20     | 0.022<br>0.028                         | 0.044<br>0.056 | 2,555<br>2,490                       | 16×35.5<br>18×31.5 | 0.016<br>0.016                         | 0.032<br>0.032 | 3,150<br>3,635                       |                           |  |                         |                                      |
| 6,800                | 16×25<br>18×20   | 0.022<br>0.028                         | 0.044<br>0.056 | 2,555<br>2,490                      | 16×31.5<br>18×25   | 0.018<br>0.020                         | 0.036<br>0.040 | 3,010<br>2,740                       | 18×35.5            | 0.015                                  | 0.030          | 3,680                                | 18×40                     | 0.014                                  | 0.028                   | 3,800                                |
| 8,200                | 16×31.5          | 0.018                                  | 0.036          | 3,010                               | 16×35.5<br>18×31.5 | 0.016<br>0.016                         | 0.032<br>0.032 | 3,150<br>3,635                       | 18×35.5            | 0.015                                  | 0.030          | 3,680                                |                           |  |                         |                                      |
| 10,000               | 16×31.5<br>18×25 | 0.016<br>0.020                         | 0.032<br>0.040 | 3,150<br>2,740                      | 18×35.5            | 0.015                                  | 0.030          | 3,680                                | 18×40              | 0.014                                  | 0.028          | 3,800                                |                           |  |                         |                                      |
| 12,000               | 18×31.5          | 0.016                                  | 0.032          | 3,635                               |                    |  |                |                                      |                    |  |                |                                      |                           |  |                         |                                      |
| 15,000               | 18×35.5          | 0.015                                  | 0.030          | 3,680                               | 18×40              | 0.014                                  | 0.028          | 3,800                                |                    |  |                |                                      |                           |  |                         |                                      |

Dimension:  $\phi D \times L$ (mm)  
 Impedance:  $\Omega$ / at 100k Hz  
 Ripple Current: mA/rms at 105°C

### Dimension and Permissible Ripple Current

| Rated Volt.<br>(V <sub>DC</sub> ) | 35V (1V)           |  |                |                                      | 50V (1H)           |  |                |                                      | 63V (1J)                    |  |                         |                                      | 100V (2A)          |  |                |                                      |
|-----------------------------------|--------------------|--|----------------|--------------------------------------|--------------------|--|----------------|--------------------------------------|-----------------------------|--|-------------------------|--------------------------------------|--------------------|--|----------------|--------------------------------------|
|                                   | $\phi D \times L$  | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms, 105°C) | $\phi D \times L$  | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms, 105°C) | $\phi D \times L$           | Impedance<br>( $\Omega$ , max./100kHz) |                         | Ripple<br>Current<br>(mA/rms, 105°C) | $\phi D \times L$  | Impedance<br>( $\Omega$ , max./100kHz) |                | Ripple<br>Current<br>(mA/rms, 105°C) |
|                                   |                    | 20°C                                   | -10°C          | 100k Hz                              |                    | 20°C                                   | -10°C          | 100k Hz                              |                             | 20°C                                   | -10°C                   | 100k Hz                              |                    | 20°C                                   | -10°C          | 100k Hz                              |
| 2.2                               |                    |  |                |                                      |                    |  |                |                                      |                             |  |                         |                                      | 5x11               | 9.8                                    | 19.6           | 44                                   |
| 3.3                               |                    |  |                |                                      |                    |  |                |                                      |                             |  |                         |                                      | 5x11               | 6.6                                    | 13.2           | 58                                   |
| 4.7                               | 5x11               | 0.6                                    | 1.2            | 180                                  | 5x11               | 2.3                                    | 4.6            | 90                                   | 5x11                        | 4.7                                    | 9.4                     | 68                                   | 5x11               | 4.6                                    | 9.2            | 74                                   |
| 6.8                               |                    |  |                |                                      |                    |  |                |                                      | 5x11                        | 2.5                                    | 5.0                     | 95                                   | 5x11               | 3.5                                    | 7.0            | 95                                   |
| 10                                | 5x11               | 0.6                                    | 1.2            | 180                                  | 5x11               | 1.4                                    | 2.8            | 120                                  | 5x11                        | 2.1                                    | 4.2                     | 110                                  | 6.3x11             | 1.8                                    | 3.6            | 130                                  |
| 12                                |                    |  |                |                                      |                    |  |                |                                      | 5x11                        | 2.0                                    | 4.0                     | 145                                  |                    |  |                |                                      |
| 15                                |                    |  |                |                                      |                    |  |                |                                      | 6.3x11                      | 1.2                                    | 2.4                     | 160                                  |                    |  |                |                                      |
| 18                                |                    |  |                |                                      | 5x11               | 1.3                                    | 2.6            | 155                                  |                             |  |                         |                                      | 6.3x15             | 0.80                                   | 1.60           | 200                                  |
| 22                                | 5x11               | 0.6                                    | 1.2            | 180                                  | 5x11               | 1.2                                    | 2.4            | 170                                  | 6.3x11                      | 0.71                                   | 1.42                    | 250                                  | 8x11.5             | 0.68                                   | 1.36           | 230                                  |
| 27                                | 5x11               | 0.6                                    | 1.2            | 180                                  |                    |  |                |                                      |                             |  |                         |                                      |                    |  |                |                                      |
| 33                                | 5x11               | 0.6                                    | 1.2            | 180                                  | 6.3x11             | 0.43                                   | 0.86           | 300                                  | 6.3x11                      | 0.71                                   | 1.42                    | 250                                  | 8x15<br>10x12.5    | 0.45<br>0.46                           | 0.90<br>0.92   | 360<br>320                           |
| 39                                |                    |  |                |                                      |                    |  |                |                                      | 6.3x15                      | 0.70                                   | 1.40                    | 330                                  |                    |  |                |                                      |
| 47                                | 6.3x11             | 0.25                                   | 0.5            | 290                                  | 6.3x11             | 0.43                                   | 0.86           | 300                                  | 8x11.5                      | 0.342                                  | 0.684                   | 405                                  | 10x16<br>8x20      | 0.37<br>0.37                           | 0.74<br>0.74   | 420<br>420                           |
| 56                                | 6.3x11             | 0.25                                   | 0.5            | 290                                  | 6.3x15             | 0.40                                   | 0.80           | 360                                  |                             |  |                         |                                      |                    |  |                |                                      |
| 68                                |                    |  |                |                                      |                    |  |                |                                      | 8x11.5                      | 0.342                                  | 0.684                   | 405                                  | 10x20              | 0.30                                   | 0.60           | 490                                  |
| 82                                | 6.3x15             | 0.23                                   | 0.46           | 430                                  | 8x11.5             | 0.234                                  | 0.468          | 485                                  |                             |  |                         |                                      | 10x25              | 0.25                                   | 0.50           | 540                                  |
| 100                               | 8x11.5             | 0.117                                  | 0.234          | 555                                  | 8x11.5             | 0.234                                  | 0.468          | 485                                  | 10x12.5<br>8x15             | 0.256<br>0.230                         | 0.512<br>0.460          | 535<br>535                           | 12.5x20            | 0.18                                   | 0.36           | 580                                  |
| 120                               |                    |  |                |                                      | 8x15<br>10x12.5    | 0.155<br>0.162                         | 0.310<br>0.324 | 635<br>615                           | 10x16                       | 0.194                                  | 0.388                   | 600                                  |                    |  |                |                                      |
| 150                               | 8x11.5             | 0.117                                  | 0.234          | 555                                  | 10x12.5            | 0.162                                  | 0.324          | 615                                  | 10x16                       | 0.194                                  | 0.388                   | 660                                  | 12.5x25            | 0.13                                   | 0.26           | 710                                  |
| 180                               |                    |  |                |                                      | 8x20<br>10x16      | 0.120<br>0.119                         | 0.240<br>0.238 | 860<br>850                           | 10x20<br>12.5x16            | 0.147<br>0.150                         | 0.294<br>0.300          | 885<br>1,020                         | 12.5x30<br>16x20   | 0.12<br>0.13                           | 0.24<br>0.26   | 790<br>750                           |
| 220                               | 8x15<br>10x12.5    | 0.085<br>0.090                         | 0.17<br>0.18   | 730<br>755                           | 10x16<br>10x20     | 0.119<br>0.090                         | 0.238<br>0.180 | 850<br>1,030                         | 10x20<br>10x25              | 0.147<br>0.130                         | 0.294<br>0.260          | 885<br>1,050                         | 16x25<br>18x20     | 0.10<br>0.11                           | 0.20<br>0.22   | 890<br>850                           |
| 270                               |                    |  |                |                                      | 10x25              | 0.082                                  | 0.164          | 1,200                                | 16x16                       | 0.090                                  | 0.180                   | 1,410                                |                    |  |                |                                      |
| 330                               | 8x20<br>10x16      | 0.065<br>0.068                         | 0.130<br>0.136 | 995<br>1,050                         | 10x20<br>10x30     | 0.090<br>0.060                         | 0.180<br>0.120 | 1,030<br>1,610                       | 12.5x20                     | 0.085                                  | 0.170                   | 1,285                                | 16x25              | 0.090                                  | 0.180          | 1,080                                |
| 390                               | 10x20              | 0.052                                  | 0.104          | 1,220                                | 12.5x20            | 0.063                                  | 0.126          | 1,480                                | 12.5x25<br>18x16            | 0.070<br>0.086                         | 0.140<br>0.172          | 1,720<br>1,690                       | 18x25              | 0.083                                  | 0.166          | 1,260                                |
| 470                               | 10x20              | 0.052                                  | 0.104          | 1,220                                | 12.5x20            | 0.060                                  | 0.120          | 1,500                                | 12.5x25<br>12.5x30<br>16x20 | 0.070<br>0.055<br>0.059                | 0.140<br>0.110<br>0.118 | 1,720<br>2,090<br>1,765              | 16x31.5            | 0.076                                  | 0.152          | 1,310                                |
| 560                               | 10x25              | 0.045                                  | 0.090          | 1,440                                | 12.5x25            | 0.050                                  | 0.100          | 1,832                                | 16x25                       | 0.050                                  | 0.100                   | 2,160                                | 18x31.5<br>18x35.5 | 0.068<br>0.064                         | 0.136<br>0.128 | 1,370<br>1,410                       |
| 680                               | 10x30<br>12.5x20   | 0.035<br>0.038                         | 0.070<br>0.076 | 1,815<br>1,655                       | 12.5x25<br>16x20   | 0.050<br>0.048                         | 0.100<br>0.096 | 1,832<br>1,835                       | 12.5x35<br>18x20            | 0.047<br>0.055                         | 0.094<br>0.110          | 2,265<br>2,290                       |                    |  |                |                                      |
| 820                               |                    |  |                |                                      | 12.5x35<br>18x20   | 0.034<br>0.042                         | 0.068<br>0.084 | 2,285<br>2,200                       | 16x31.5<br>18x25            | 0.043<br>0.043                         | 0.086<br>0.086          | 2,670<br>2,585                       | 18x40              | 0.047                                  | 0.094          | 1,520                                |
| 1,000                             | 12.5x25            | 0.030                                  | 0.060          | 1,945                                | 16x25              | 0.034                                  | 0.068          | 2,235                                | 16x31.5<br>16x35.5          | 0.043<br>0.036                         | 0.086<br>0.072          | 2,670<br>2,770                       |                    |  |                |                                      |
| 1,200                             | 12.5x30<br>16x20   | 0.025<br>0.029                         | 0.050<br>0.058 | 2,310<br>2,205                       | 16x31.5<br>18x25   | 0.028<br>0.029                         | 0.056<br>0.058 | 2,700<br>2,610                       | 18x31.5                     | 0.032                                  | 0.064                   | 2,950                                |                    |  |                |                                      |
| 1,500                             | 12.5x35<br>16x25   | 0.022<br>0.022                         | 0.044<br>0.044 | 2,510<br>2,555                       | 16x31.5<br>16x35.5 | 0.028<br>0.025                         | 0.056<br>0.050 | 2,700<br>2,790                       | 18x35.5                     | 0.030                                  | 0.060                   | 3,095                                |                    |  |                |                                      |
| 1,800                             | 16x25<br>18x20     | 0.022<br>0.028                         | 0.044<br>0.056 | 2,555<br>2,490                       | 18x31.5            | 0.025                                  | 0.05           | 3,000                                |                             |  |                         |                                      |                    |  |                |                                      |
| 2,200                             | 16x31.5<br>18x25   | 0.018<br>0.020                         | 0.036<br>0.040 | 3,010<br>2,740                       | 18x35.5            | 0.023                                  | 0.046          | 3,100                                | 18x40                       | 0.028                                  | 0.056                   | 3,200                                |                    |  |                |                                      |
| 2,700                             | 16x35.5<br>18x31.5 | 0.016<br>0.016                         | 0.032<br>0.032 | 3,150<br>3,635                       |                    |  |                |                                      |                             |  |                         |                                      |                    |  |                |                                      |
| 3,300                             | 18x35.5            | 0.015                                  | 0.030          | 3,680                                |                    |  |                |                                      |                             |  |                         |                                      |                    |  |                |                                      |
| 4,700                             | 18x40              | 0.014                                  | 0.028          | 3,800                                |                    |  |                |                                      |                             |  |                         |                                      |                    |  |                |                                      |

### Part Numbering System

RXW Series    470 $\mu$ F     $\pm 20\%$     6.3V    Bulk Package    Gas Type    8  $\phi$  x 11.5L

**RXW**    **471**    **M**    **OJ**    **BK**    -    **0811**    **XX**  
 Series Name    Capacitance    Capacitance Tolerance    Rated Voltage    Lead Configuration and Package    Rubber Type    Case Size

**S** = Standard  
**KS** = AEC-Q200 Qualified, Safety Critical Application  
**LS** = AEC-Q200 Qualified, Non-Safety Critical Application