

特点 Features


- 85°C, 2000小时。
85°C, 2000hours.
- 适用于开关电源、适配器、彩电、音响、空调等电子线路中。
Used in Smps, Adapter, color-TV, audio sets, air conditioning circuits etc.
- RoHS指令已对应完毕。
Adapted to the RoHS directive.



主要技术性能 Specifications

项目 Items	特性 Characteristics																																												
使用温度范围 Operating Temperature Range	-40~+85°C	-25~+85°C																																											
额定电压范围 Rated Voltage Range	6.3~100V	160~500V																																											
标称电容量范围 Nominal Capacitance Range	0.1~33000µF																																												
标称电容量允许偏差 Capacitance Tolerance	± 20% (120Hz, +20°C)																																												
漏电流 Leakage Current	$I \leq 0.01CV$ (µA)或 $3\mu A$ 2分钟 取较大者 (at 20°C, after 2 minutes) (Whichever is greater)	$I \leq 0.03CV$ (µA) + $10\mu A$ 2分钟(2 minute)																																											
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <tr> <td>U_R (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tgδ</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> </tr> </table> <table border="1"> <tr> <td>U_R (V)</td> <td>160</td> <td>200</td> <td>250</td> <td>400</td> <td>420</td> <td>450</td> <td>500</td> </tr> <tr> <td>tgδ</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> </tr> </table> <p>容量大于1000µF者, 每增加1000µF, 其损耗角正切值增加0.02 When nominal capacitance exceeds 1000µF, add 0.02 to the value above for each 1000µF increase.</p>		U_R (V)	6.3	10	16	25	35	50	63	100	tgδ	0.24	0.20	0.16	0.14	0.12	0.10	0.10	0.08	U_R (V)	160	200	250	400	420	450	500	tgδ	0.20	0.20	0.20	0.20	0.20	0.20	0.24									
U_R (V)	6.3	10	16	25	35	50	63	100																																					
tgδ	0.24	0.20	0.16	0.14	0.12	0.10	0.10	0.08																																					
U_R (V)	160	200	250	400	420	450	500																																						
tgδ	0.20	0.20	0.20	0.20	0.20	0.20	0.24																																						
温度特性 Temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>U_R (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>10</td> <td>8</td> <td>6</td> <td>5</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> <table border="1"> <tr> <td>U_R (V)</td> <td>160</td> <td>200</td> <td>250</td> <td>400</td> <td>420</td> <td>450</td> <td>500</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>3</td> <td>3</td> <td>4</td> <td>6</td> <td>7</td> <td>7</td> <td>8</td> </tr> </table> <p>Z-25°C / Z+20°C, 容量大于1000µF者, 每增加1000µF阻抗比增加0.5 when nominal capacitance exceeds 1000µF, Add 0.5 to the value of Z-25°C / Z+20°C above for each 1000µF increase. Z-40°C / Z+20°C, 容量大于1000µF者, 每增加1000µF阻抗比增加1.0 when nominal capacitance exceeds 1000µF, Add 1.0 to the value of Z-40°C / Z+20°C above for each 1000µF increase.</p>		U_R (V)	6.3	10	16	25	35	50	63	100	Z-25°C / Z+20°C	5	4	3	2	2	2	2	2	Z-40°C / Z+20°C	10	8	6	5	3	3	3	3	U_R (V)	160	200	250	400	420	450	500	Z-25°C / Z+20°C	3	3	4	6	7	7	8
U_R (V)	6.3	10	16	25	35	50	63	100																																					
Z-25°C / Z+20°C	5	4	3	2	2	2	2	2																																					
Z-40°C / Z+20°C	10	8	6	5	3	3	3	3																																					
U_R (V)	160	200	250	400	420	450	500																																						
Z-25°C / Z+20°C	3	3	4	6	7	7	8																																						
耐久性 Load Life	<p>+85°C加额定电压2000小时, 恢复16小时后: After applying rated voltage for 2000 hours at +85°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤The initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value</p>																																												
高温贮存 Shelf Life	<p>+85°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +85°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value</p>																																												

外形图及尺寸表 Case Size Table

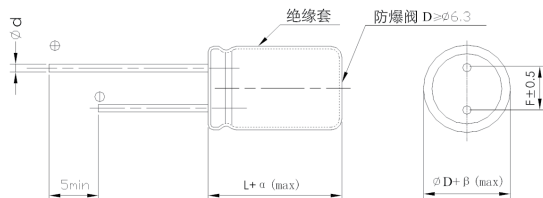

单位 Unit: mm

	5	6.3	8	10	12.5	16~18	22
D	5	6.3	8	10	12.5	16~18	22
F	2	2.5	3.5	5.0	5.0	7.5	10
d	0.5	0.5	0.5, 0.6	0.6	0.6	0.8	0.8

αMAX	< L < 20 > 1.5	βMAX	< D < 20 > 0.5
	< L ≥ 20 > 2.0		< D ≥ 20 > 1.0

频率修正系数 Frequency Coefficient

Rated Voltage(V)	Freq.(Hz)		50	120	300	1K	10K	100K
	CAP(μF)							
6.3~100	~47		0.75	1.00	1.35	1.57	2.00	2.30
	100~470		0.80	1.00	1.23	1.34	1.50	1.65
	≥560		0.85	1.00	1.10	1.13	1.15	1.40
160~500	0.47~4.7		0.65	1.00	1.35	1.75	2.30	2.50
	6.8~82		0.75	1.00	1.25	1.50	1.75	1.80
	100~1000		0.80	1.00	1.15	1.30	1.40	1.50

尺寸 Dimensions

CAP(μF)		WV		6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple		
0.1	0R1													5×11	1.3
0.22	R22													5×11	2.9
0.33	R33													5×11	4.3
0.47	R47													5×11	6.2
1	010													5×11	13
2.2	2R2											5×11	25	5×11	28
3.3	3R3									5×11	20	5×11	35	5×11	35
4.7	4R7							5×11	30	5×11	30	5×11	55	5×11	50
10	100							5×11	40	5×11	55	5×11	90	5×11	75
22	220					5×11	55	5×11	75	5×11	80	5×11	110	5×11	110
33	330	5×11	55	5×11	80	5×11	80	5×11	100	5×11	140	5×11	140	5×11	130
47	470	5×11	75	5×11	95	5×11	115	5×11	130	6.3×11	235	6.3×11	180		
100	101	5×11	135	5×11	145	5×11	175	6.3×11	215	8×11.5	405	8×11.5	310		
220	221	5×11	220	5×11	230	6.3×11	290	8×11.5	370	10×12.5	580	10×12.5	510		
330	331	6.3×11	300	6.3×11	325	6.3×11	350	8×11.5	455			10×16	710		
						8×11.5	370			10×16	755	12.5×12.5	730		
470	471	6.3×11	360	6.3×11	385	8×11.5	500	10×12.5	630	10×20	990	10×20	815		
680	681	8×11.5	505	8×11.5	550	10×12.5	690	10×16	830	12.5×20	1410	12.5×20	1000		
1000	102	8×11.5	610	10×12.5	795	10×16	930	10×20	1095	10×25	1375	12.5×25	1715		
		10×12.5	720			10×12.5	838	10×16	992						
1500	152	10×12.5	780	10×16	875	10×20	1025	12.5×20	1210	16×25	2135				
2200	222	10×16	900	10×20	1230	12.5×20	1555	12.5×25	1800	16×30	2340	16×30	2320		
3300	332	10×20	1350	12.5×20	1685	12.5×25	1990	16×25	2305	18×35	3400	18×35	3220		
4700	472	12.5×20	1830	12.5×25	2105	16×25	2490	16×30	2855	18×40	3500	18×40	3340		
		12.5×25	1930	16×25	2610	16×30	3010	16×40	3530			22×50	3400		
10000	103	16×25	2760	16×30	2960	16×35	3490	22×35	3650						
15000	153	16×35	2860	16×40	3100	22×35	3400	22×35	3700						
22000	223	18×40	3400	22×35	3700	22×50	4200	22×50	4200						
33000	333	22×50	3900												

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

尺寸 Dimensions

WV CAP(μF)		63V(1J)		100V(2A)		160V(2C)		200V(2D)		250V(2E)		350V(2V)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	R47			5×11	10					6.3×11	10	6.3×11	12
1	010			5×11	25			6.3×11	18	6.3×11	18	6.3×11	20
2.2	2R2	5×11	28	5×11	40	6.3×11	30	6.3×11	30	6.3×11	32	6.3×11	38
3.3	3R3			5×11	45	6.3×11	38	6.3×11	38	6.3×11	40	8×11.5	55
4.7	4R7			5×11	55	6.3×11	56	6.3×11	56	6.3×11	58	8×11.5	70
6.8	6R8			5×11	65	6.3×11	63	8×11.5	73	8×11.5	75	8×14	83
10	100	5×11	80	5×11	80	8×11.5	90	8×11.5	95	10×12.5	105	10×16	120
22	220	5×11	115	6.3×11	135	10×16	172	10×16	175	10×20	195	12.5×20	210
				8×11.5	155								
33	330	6.3×11	160	8×11.5	190	10×20	230	10×20	240	12.5×20	260	12.5×25	300
47	470	6.3×11	190	10×12.5	260	10×20	285	12.5×20	310	12.5×20	310	16×25	390
68	680			10×16	290	12.5×20	370	12.5×25	410	16×20	430	16×30	500
100	101	8×11.5	325	10×20	455	12.5×25	490	16×20	520	16×25	580	16×35	640
120	121			16×25	850	16×20	560	16×25	630	16×30	680		
150	151	10×12.5	553	10×25	601								
220	221	10×16	615	12.5×20	745	16×30	900	16×35	960	18×35	1020		
330	331	10×20	825	12.5×25	990	18×30	1150	18×35	1250				
470	471	12.5×20	1155	16×25	1395	18×35	1460	18×45	1610				
680	681	12.5×25	1515			18×45	1600						
1000	102	16×25	2040	18×35	1995								
2200	222	18×35	2300										
3300	332	18×40	2500										
4700	472	22×50	3400										

WV CAP(μF)		400V(2G)		450V(2W)		500V(2H)	
		Size	Ripple	Size	Ripple	Size	Ripple
0.47	R47	6.3×11	12	6.3×11	12		
1	010	6.3×11	20	6.3×11	20	6.3×11	20
2.2	2R2	6.3×11	38	8×11.5	38	8×11.5	34
3.3	3R3	8×11.5	55	8×11.5	50	10×12.5	50
4.7	4R7	8×11.5	70	10×12.5	70	10×16	68
		10×8	65				
5.6	5R6	10×8	71	10×12.5	72	10×16	74
6.8	6R8	8×12	83	10×12.5	80	10×20	80
		10×8.5	73				
10	100	10×16	120	10×16	105	12.5×20	105
22	220	12.5×20	210	12.5×25	210	16×20	195
33	330	12.5×25	300	16×25	300	16×25	260
47	470	16×25	390	16×30	380	16×30	320
68	680	16×30	500	16×35	480	18×35	430
82	820	16×30	580	18×30	560	18×40	500
100	101	16×35	640	18×35	640	18×45	590
120	121	16×40	750	18×40	720		
150	151	18×40	860	18×45	850		

Size: φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

Product symbol system for Aluminum Electrolytic Capacitors



① Series

Series is represented by a two-letter code. For example "SGR".

② Voltage

Voltage in volts(V) is represented by a one-digit and one-letter code.
Example:

Voltage(V)	2.5	4	6.3	10	16	25	35	50	63	80	100
Code	0E	0G	0J	1A	1C	1E	1V	1H	1J	1K	2A

Voltage(V)	160	200	250	315	350	400	420	450	500	550
Code	2C	2D	2E	2F	2V	2G	2M	2W	2H	2L

③ Capacitance

Capacitance in μF is represented by a three-digit code. The first two digits are significant and the third digit indicates the number of zeros following the significant figure. "R" represents the decimal point for capacitance under $10\mu\text{F}$.

Example:

Capacitance(μF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000
Code	0R1	R47	010	4R7	100	470	101	471	102	472	103

④ Tolerance

Tolerance is represented by a one-letter code.

Example:

Tolerance(%)	-5~+5	-10~+10	-15~+15	-20~+20	-0~+20	-5~+20	-10~+20	-0~+30	+10~+30	-10~+30	-15~+20
Code	J	K	Y	M	R	H	V	F	G	Q	E

⑤ Size code

Size code is represented by a one-letter and three-digit code. The first one-letter indicates case diameter in mm. The last three digits indicate case length in mm. When the height of a product exceeds 100mm, if the last digit is 0, it is represented by A, otherwise, it is represented by B.

Example:

ΦD	4	5	6.3	8	10	12	12.5	13	16	18	20	22	25	30	35	40	50	63.5	89
Code	B	C	E	F	G	H	I	J	L	M	O	P	Q	R	S	T	U	W	Y

L	5	5.4	9	10	11	11.5	12	14	16	20	25	50	100	105	110	115	120	200	205
Code	050	054	090	100	110	115	120	140	160	200	250	500	10A	10B	11A	11B	12A	20A	20B

Note: When a case size is required and not shown in the table, please contact with us for further discussion.

⑥ Terminal Code

Terminal Code is represented by a combination of letters or numbers

SMD Type terminal code (please refer to page 11)

Radial type terminal code (please refer to page 12~15)

Snap-in Type and Screw Type terminal code (please refer to page 16~17)

Note: When a terminal code is required and not shown in the table, please contact with us for further discussion.

⑦ Brand

The Surge trademark is represented by the letter "S".

⑧ Sleeve

The sleeve material is represented by the letter E for PET and V for PVC.

⑨ Other

It is represented by a letter or number for rubber shape or other information.

⑩ Supplement Code

For special control purposes.

For example: SGR 16V 2200 μF 20% 12.5 \times 25 taping F=5.0 Brand: Surge PVC Sleeve

S	G	R	1	C	2	2	2	M	I	2	5	0	B	5	0	S	V	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为准使用。

The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.

010