



Features

- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for use in very high frequency switching power supplies, inverters and as a free wheeling diode
- ◆ Ultrafast recovery time for high efficiency
- ◆ Excellent high temperature switching
- ◆ Glass passivated junction
- ◆ High temperature soldering guaranteed:
250°C/10seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3Kg) tension



DO-201AD

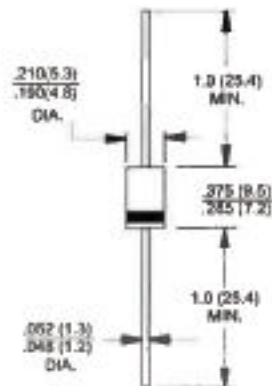

Mechanical Data

- ◆ Cases: JEDEC DO-201AD, molded plastic body over passivated chip
- ◆ Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting position: Any
- ◆ Weight: 0.045 ounce, 1.2 grams

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MUR440	MUR460	Units
Maximum repetitive peak reverse voltage	V_{RM}	400	600	Volts
Working peak reverse voltage	V_{RSM}	400	600	Volts
Maximum DC blocking voltage	V_{DC}	400	600	Volts
Maximum average forward rectified current (See Figure 1)	I_{AVC}	4.0		Amps
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{SM}	125.0		Amps
Maximum instantaneous forward voltage (Note 1)	V_f	at 3.0A, $T_J=150^\circ\text{C}$ at 3.0A, $T_J=25^\circ\text{C}$ at 4.0A, $T_J=25^\circ\text{C}$	1.05 1.25 1.28	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	I_R	$T_J=25^\circ\text{C}$ $T_J=150^\circ\text{C}$	10.0 250	μA μA
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $V_R=25\text{V}$	t_{RR}		30	nS
Maximum reverse recovery time at $I_F=1.0\text{A}$, $dI/dt=50\text{A}/\mu\text{s}$, $V_R=20\text{V}$, $I_R=10\% I_{SM}$	t_{RR}		75	nS
Maximum forward recovery time at $I_F=1.0\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, recovery to 1.0V	t_{FR}		90	nS
Typical thermal resistance junction to ambient (Note 2)	$R_{\theta JA}$	28		$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150		$^\circ\text{C}$

- Notes: 1. Pulse test: $t_p \leq 300\mu\text{s}$, duty cycle $\leq 2\%$
2. Lead length = 1/2" on P.C. Board with 1.6" x 1.6" copper surface



RATINGS AND CHARACTERISTIC CURVES

($T_a = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

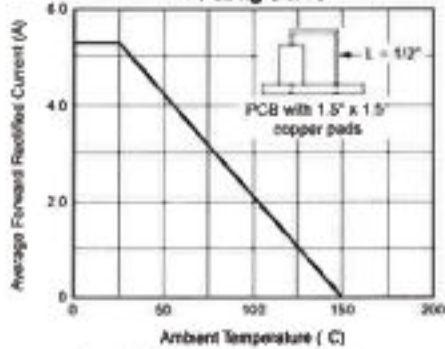


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

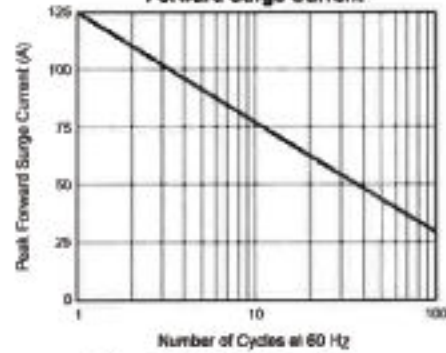


Fig. 3 – MUR460 Typical Instantaneous Forward Characteristics

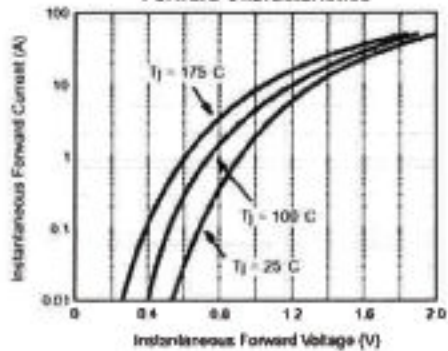


Fig. 4 – MUR460 Typical Reverse Characteristics

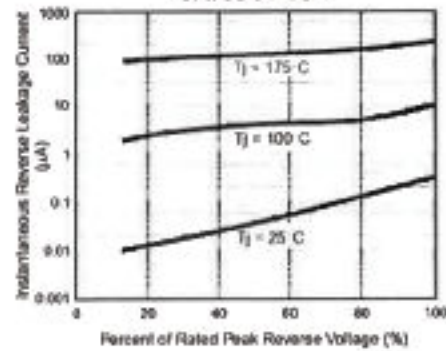


Fig. 5 – Typical Junction Capacitance per Leg

