



# SF61 thru SF69

6.0 Amps. Glass Passivated Super Fast Rectifiers  
Voltage Range 50 to 1000 Volts Forward Current 6.0 Amperes

## Features


- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability



DO-201AD

## Mechanical Data

- ◆ Case: Molded plastic DO-201AD
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◆ Mounting position: Any
- ◆ Weight: 0.041 ounce, 1.15 grams

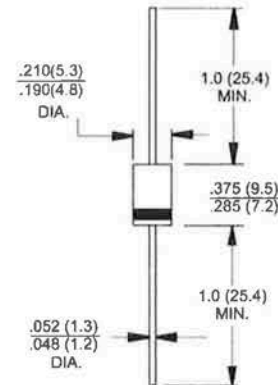

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Parameter	Symbols	SF61	SF62	SF63	SF64	SF65	SF66	SF67	SF68	SF69	Units	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	800	1000	Volts	
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	560	700	Volts	
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	800	1000	Volts	
Maximum average forward rectified current 375" (9.5mm) lead length @ $T_A=55^\circ\text{C}$	$I_{AVG}$	6.0									Amps	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150.0									Amps	
Maximum instantaneous forward voltage @ 6.0A DC	$V_F$	0.975			1.3			1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	$I_R$					5.0		100				$\mu\text{A}$ $\mu\text{A}$
Maximum reverse recovery time (Note 1)	$t_r$					35				nS		
Typical junction capacitance (Note 2)	$C_j$	115				60				pF		
Typical thermal resistance	$R_{JA}$ $R_{JL}$					20		5.0				$^\circ\text{C}/\text{W}$
Operating temperature range	$T_J$					-65 to +150				$^\circ\text{C}$		
Storage temperature range	$T_{STG}$					-65 to +150				$^\circ\text{C}$		

Notes: 1 Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$   
2 Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.



## RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


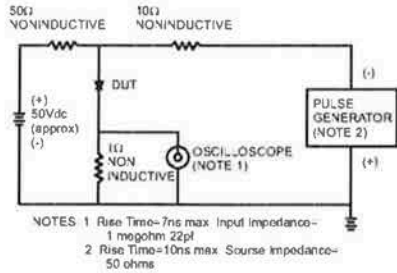


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

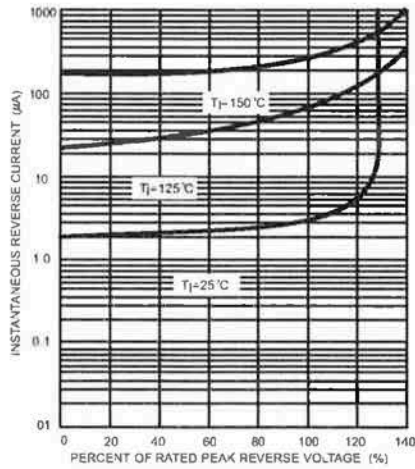


FIG.4- TYPICAL FORWARD CHARACTERISTICS

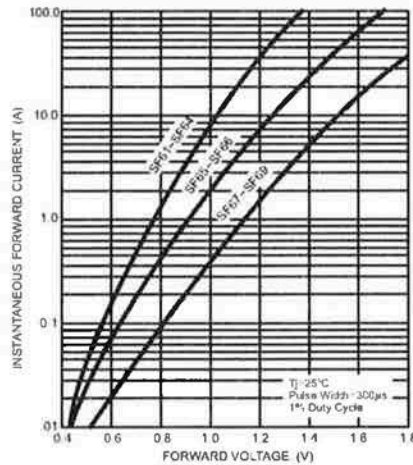


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

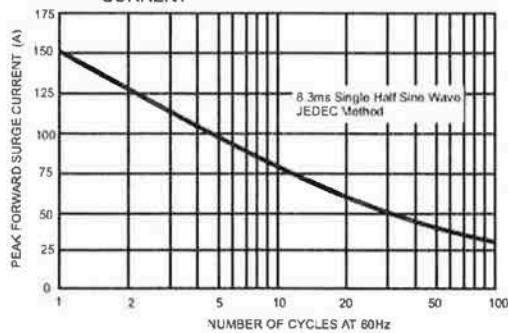


FIG.6- TYPICAL JUNCTION CAPACITANCE

